

/ Descriptions


VRW056 SQS

/ Features

/ / / / 5VF5:45

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

			℃
			℃

/ Electrical Characteristics(Ta=25)

						μ
						μ
		Ω				


/ Electrical Characteristic Curve

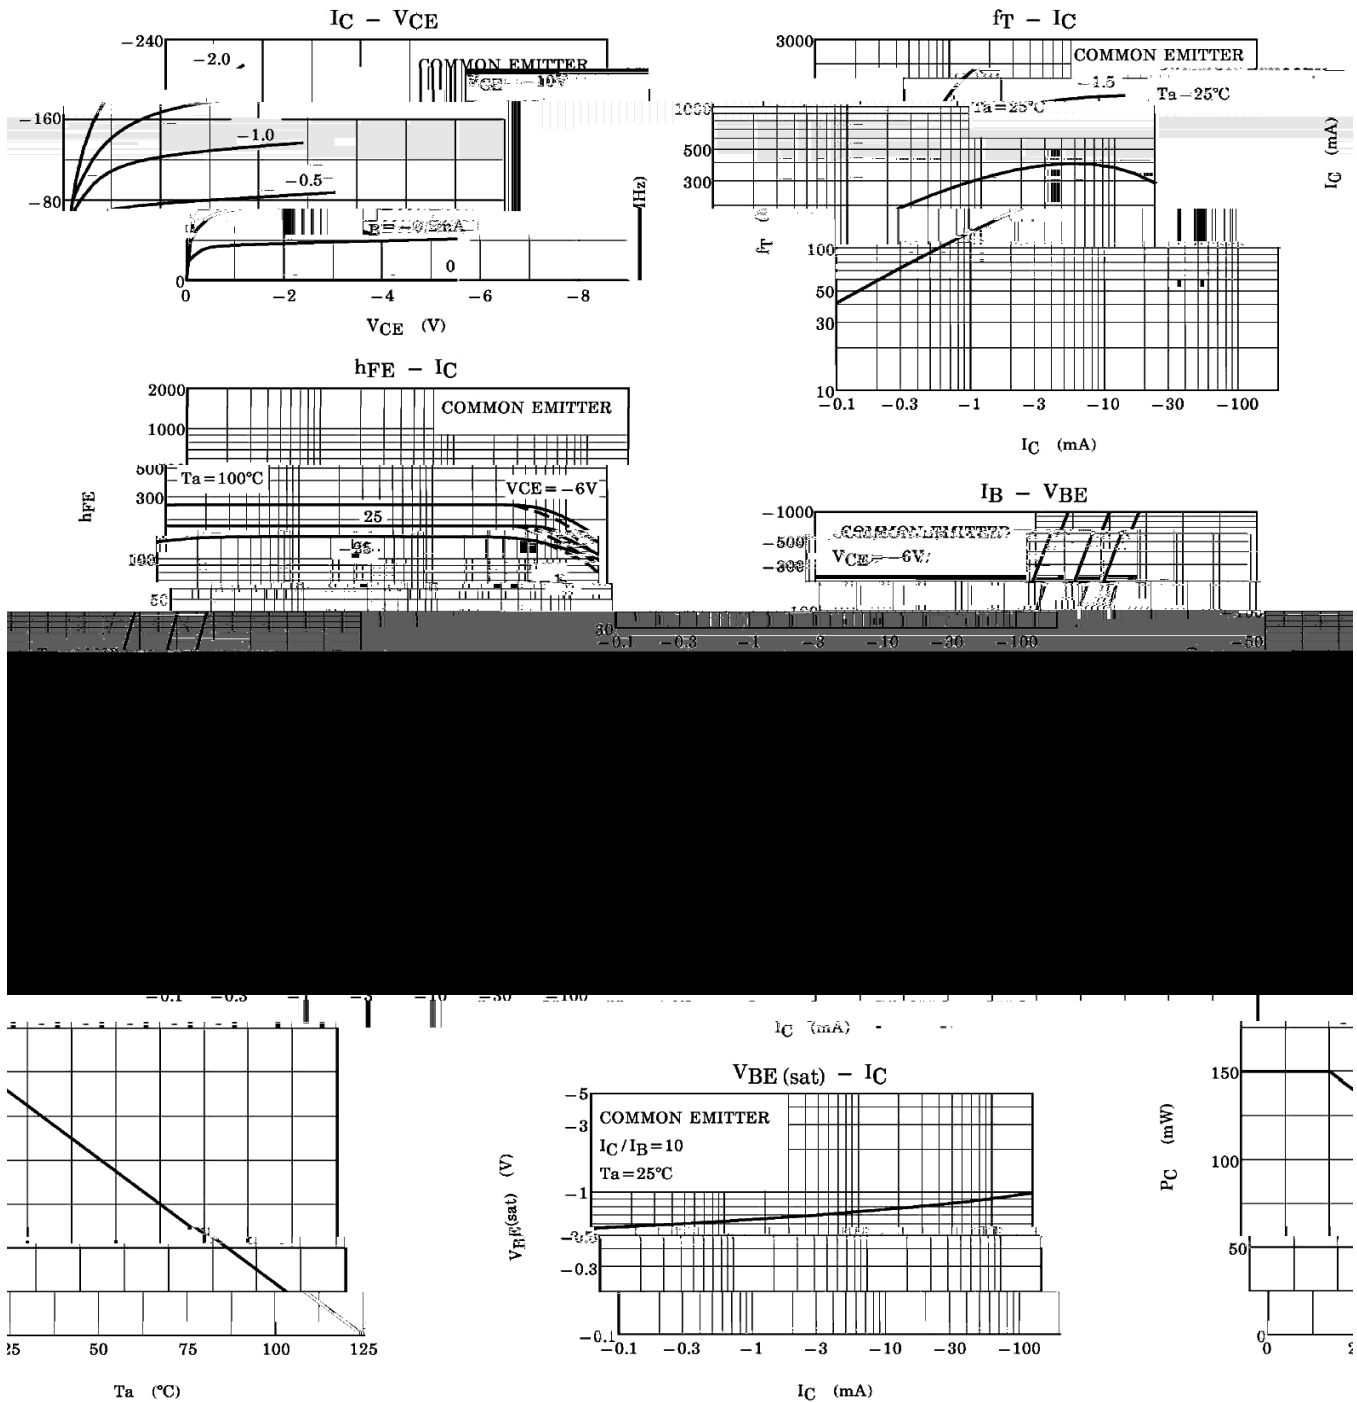

/ Package Dimensions


SOT-23

单位: mm

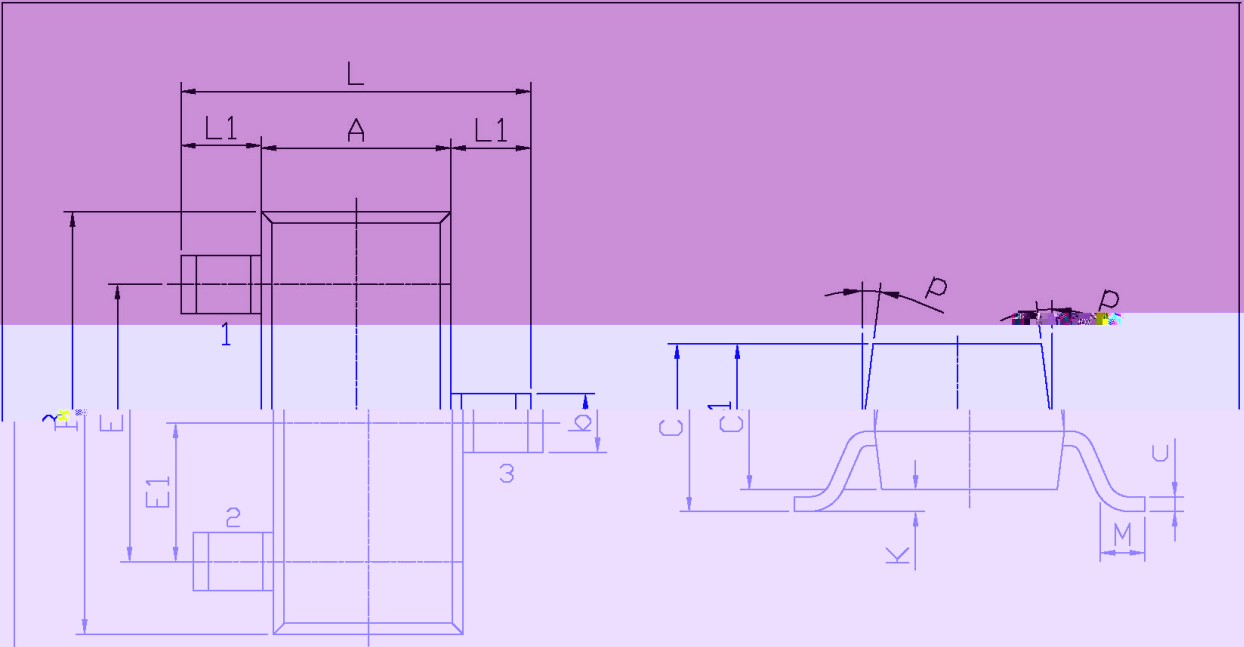


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C	1.30Max	
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
R	2.70	2.40			

/ Marking Instructions

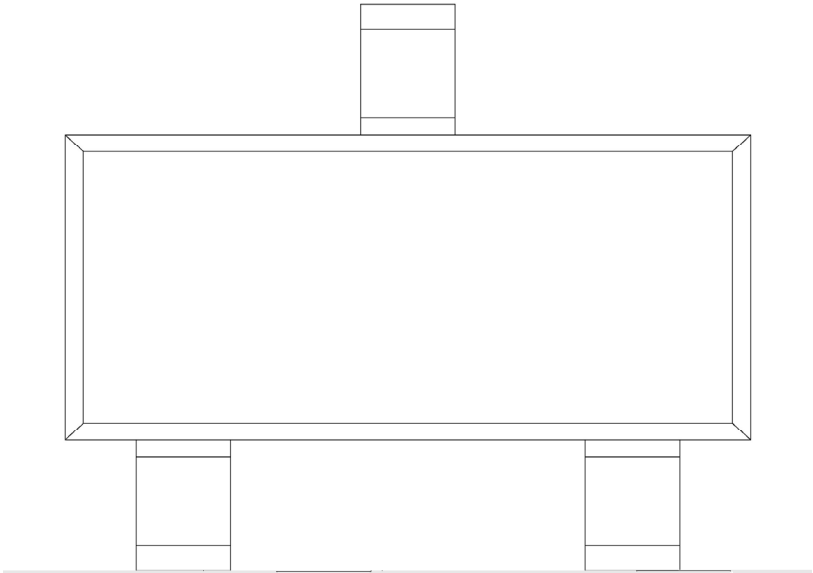

K
V
R= k_{IH}

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

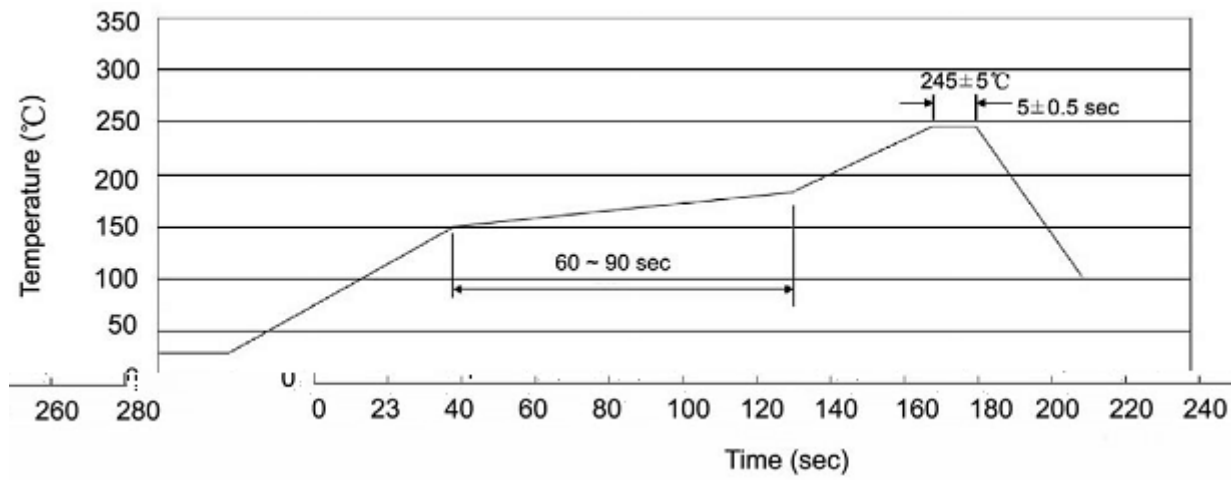

$\frac{3}{8}$ $\frac{3}{8}$

2 $\frac{3}{8}$ 2 2 $\frac{3}{8}$ 2

$\frac{3}{8}$ $\frac{3}{8}$

/ Resistance to Soldering Heat Test Conditions

2 $\frac{3}{8}$ 2 °C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices