

/ Descriptions

TO-3P PNP Silicon PNP transistor in a TO-3P Plastic Package.


/ Features

45-50W 2SD718
For 45-50W audio frequency amplifier output stage, Complementary to 2SD718.


/ Applications

Designed for use in audio frequency amplifier.

/ Equivalent Circuit



/ Pinning

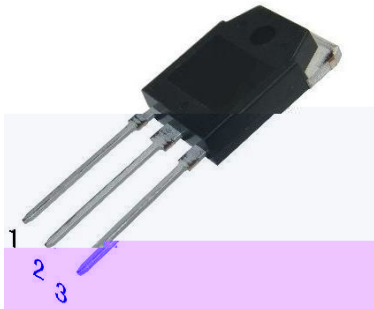


PIN1 Base PIN 2 Collector PIN 3 Emitter

/ h_{FE} Classifications & Marking


h_{FE} Classifications Symbol	R	O
h_{FE} Range	55~110	80~160

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-120	V
Collector to Emitter Voltage	V_{CEO}	-120	V
Emitter to Base Voltage	V_{EBO}	-5	V
Collector Current - Continuous	I_C	-10	A
Base Current	I_B	-1	A
Collector Power Dissipation	$P_C(T_C=25^{\circ}\text{C})$	80	W
Junction Temperature	T_J	150	$^{\circ}\text{C}$


/ Electrical Characteristic Curve

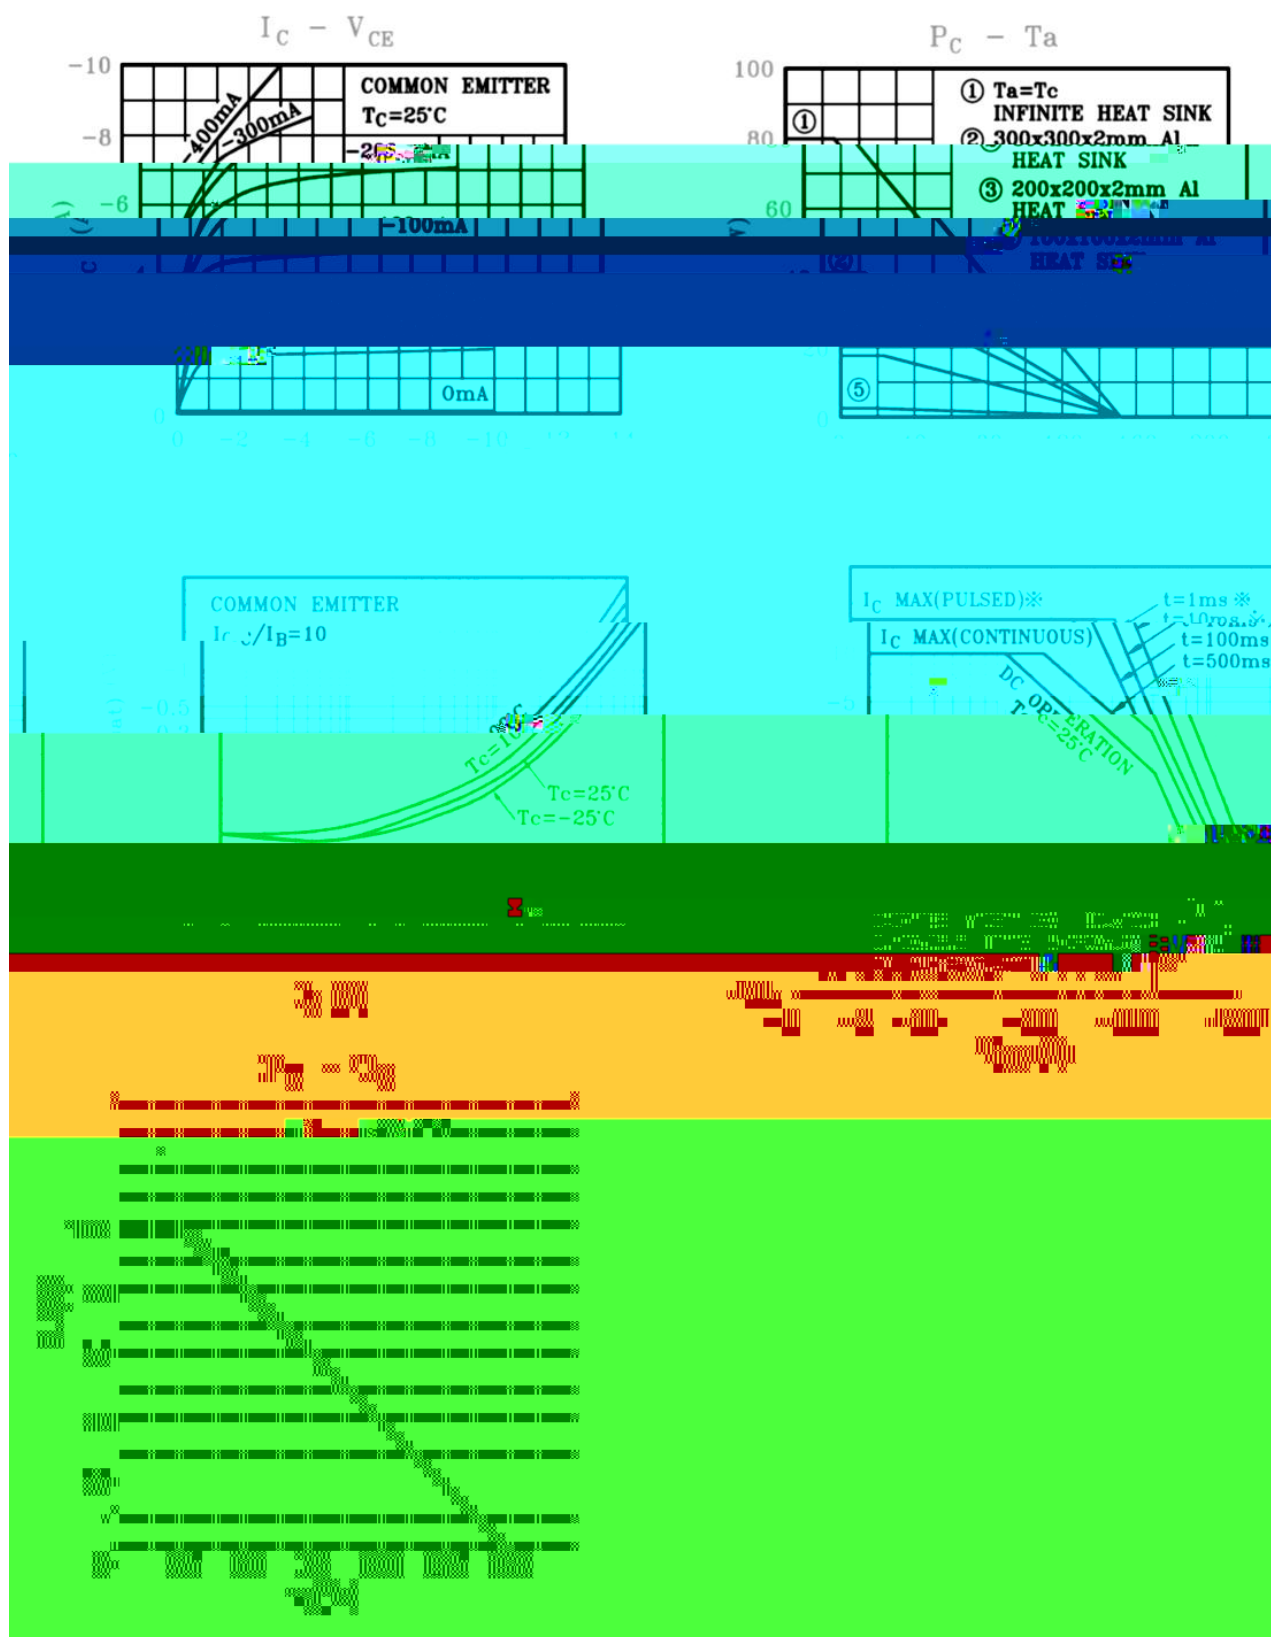

/ Package Dimensions

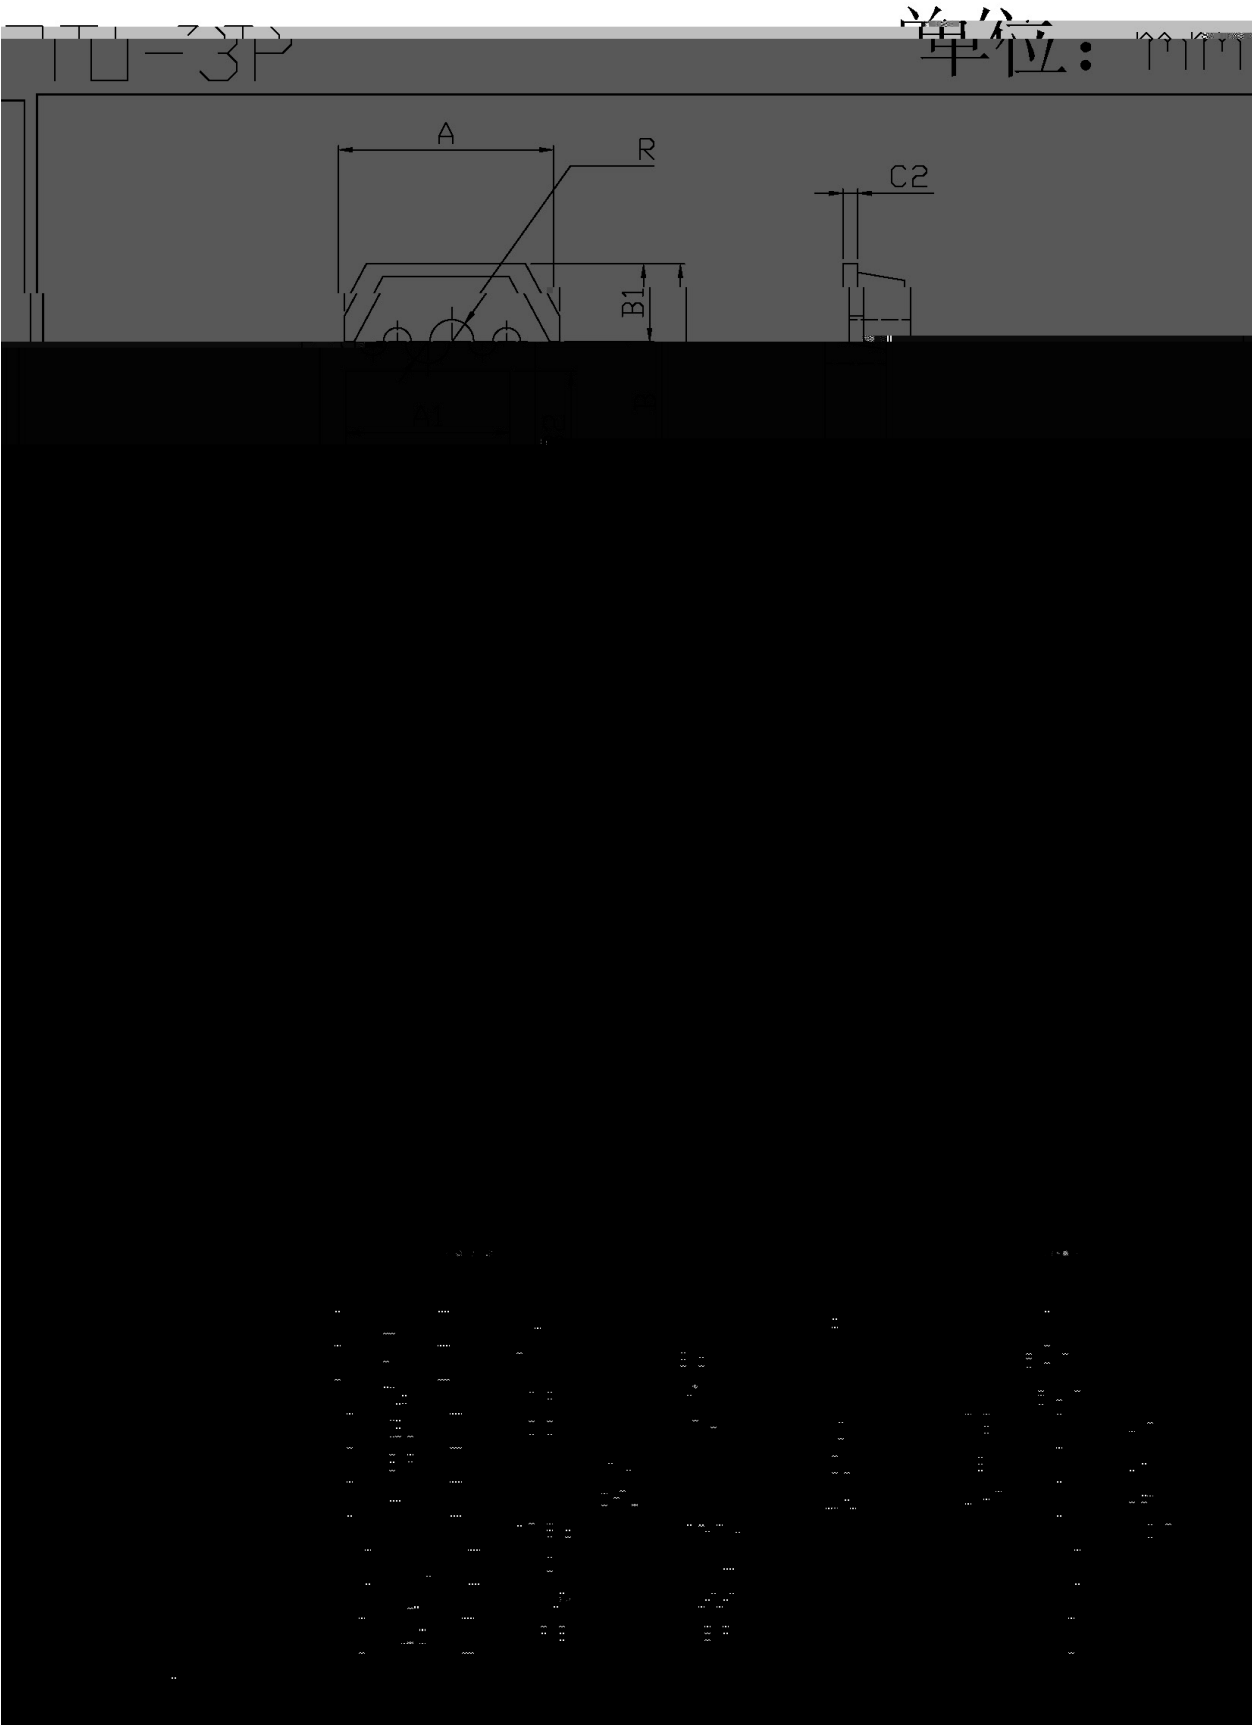

/ Marking Instructions

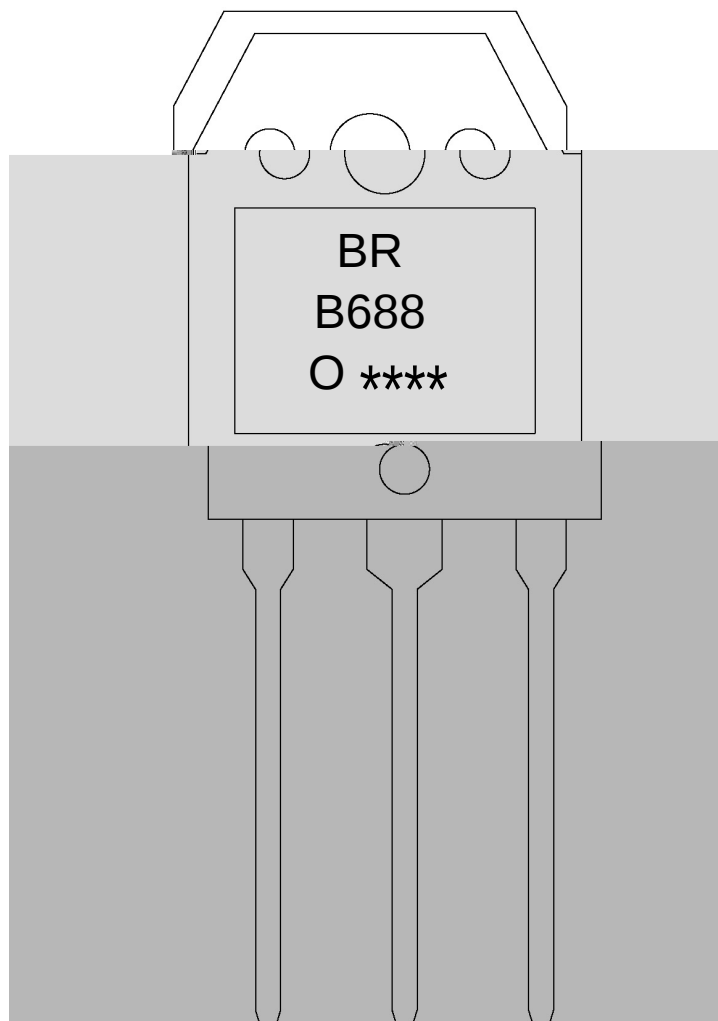

BR

B688

O: h_{FE}

Note:


BR: Company Code.

B688: Product Type.

O: h_{FE} Classifications Symbol.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

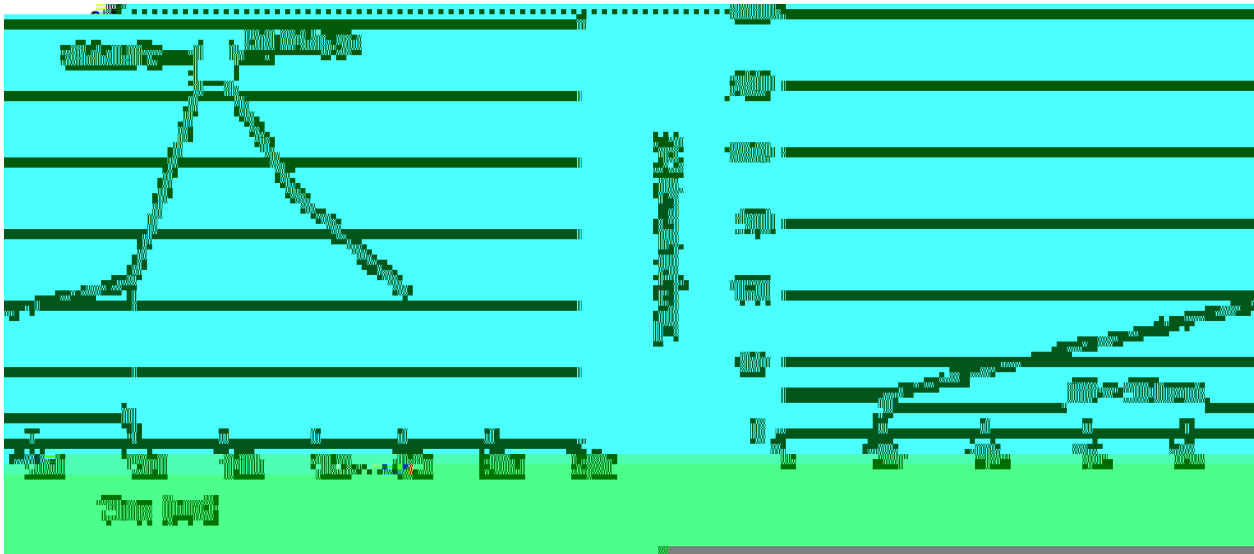

- Note:
- 1.Preheating:25~150 , Time:60~90sec.
 - 2.Peak Temp.:255±5 , Duration:5±0.5sec.
 - 3. Cooling Speed: 2~10 /sec.

- 1 25 150 60 90sec;
- 2 255±5 5±0.5sec;
- 3 2 10 /sec.

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5℃ Time:10±1 sec

/ Packaging SPEC.

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱