

/ Descriptions

TO-252 PNP


/ Features

， h_{FE}


/ Applications

3 ， ，

/ Equivalent Circuit




/ Pinning

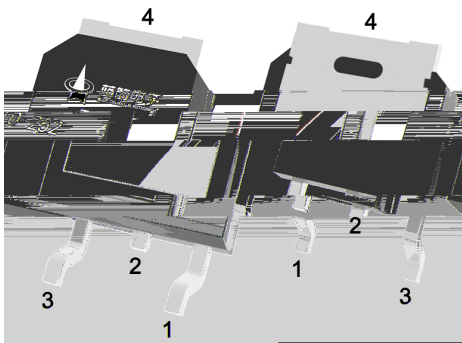


/ h_{FE} Classifications & Marking

		μ				
		μ				
						μ

I Electrical Characteristic Curve

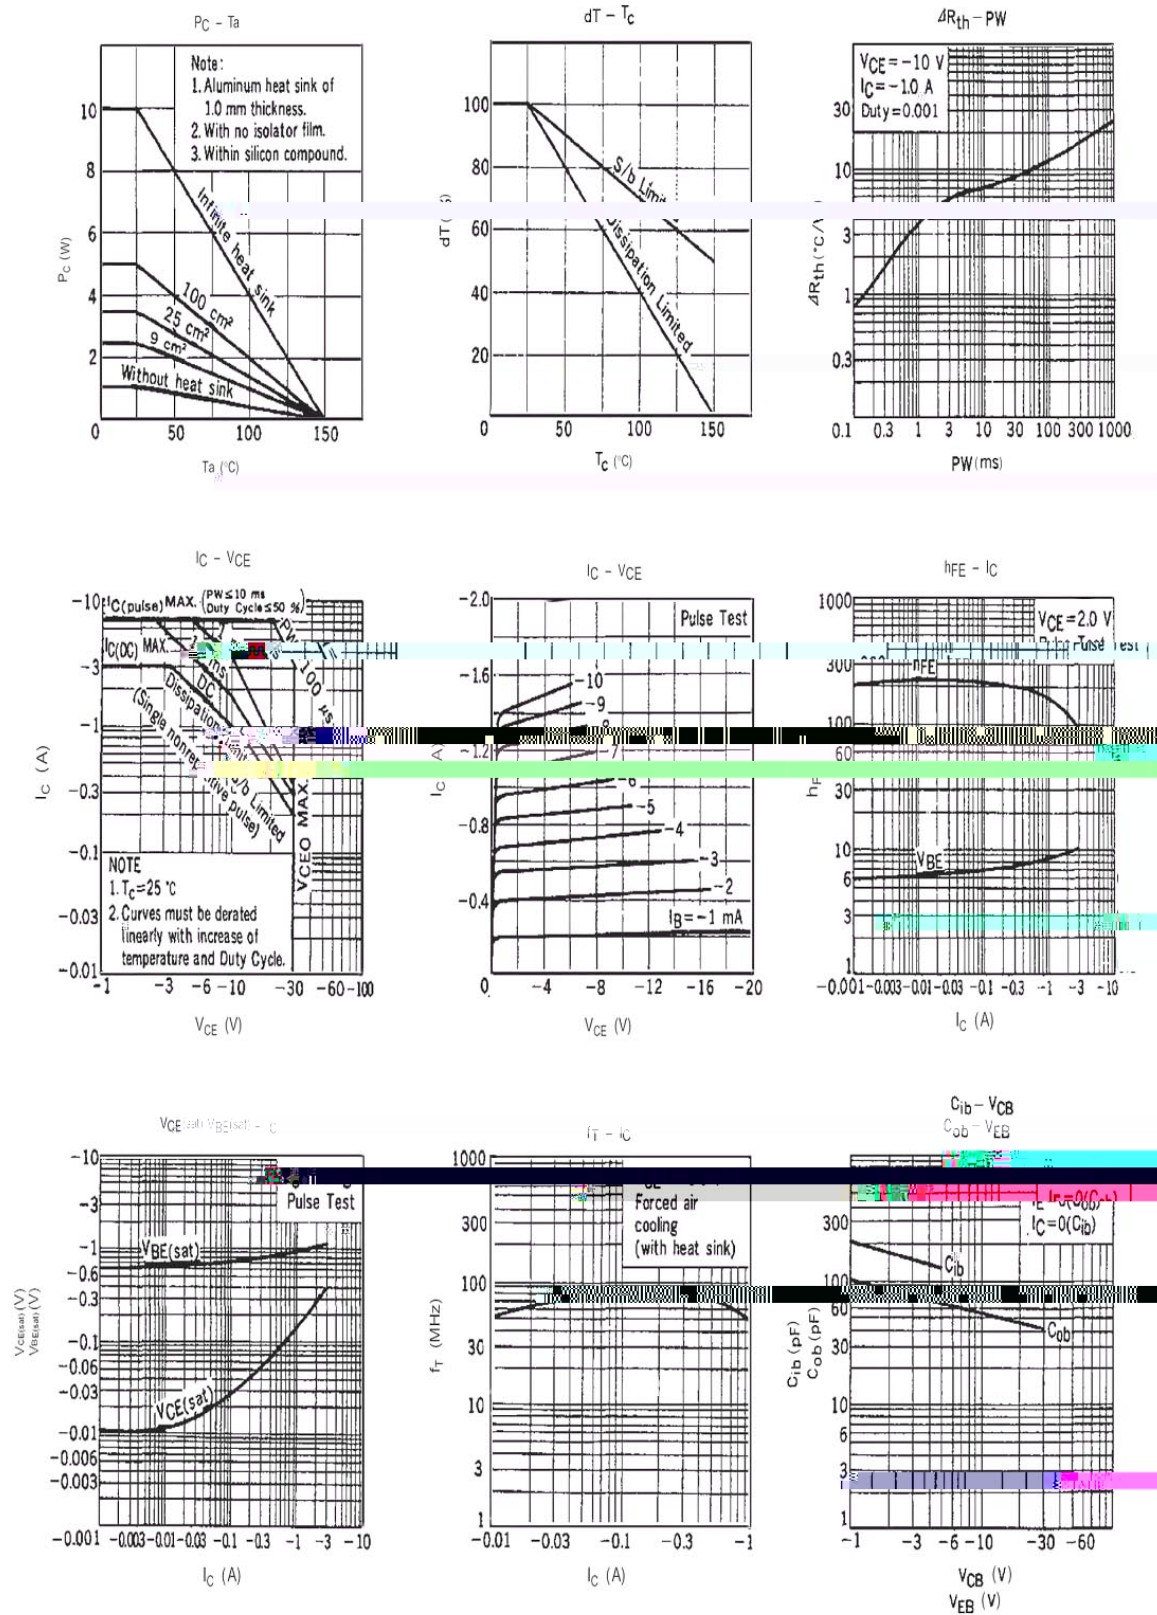


/ Package Dimensions

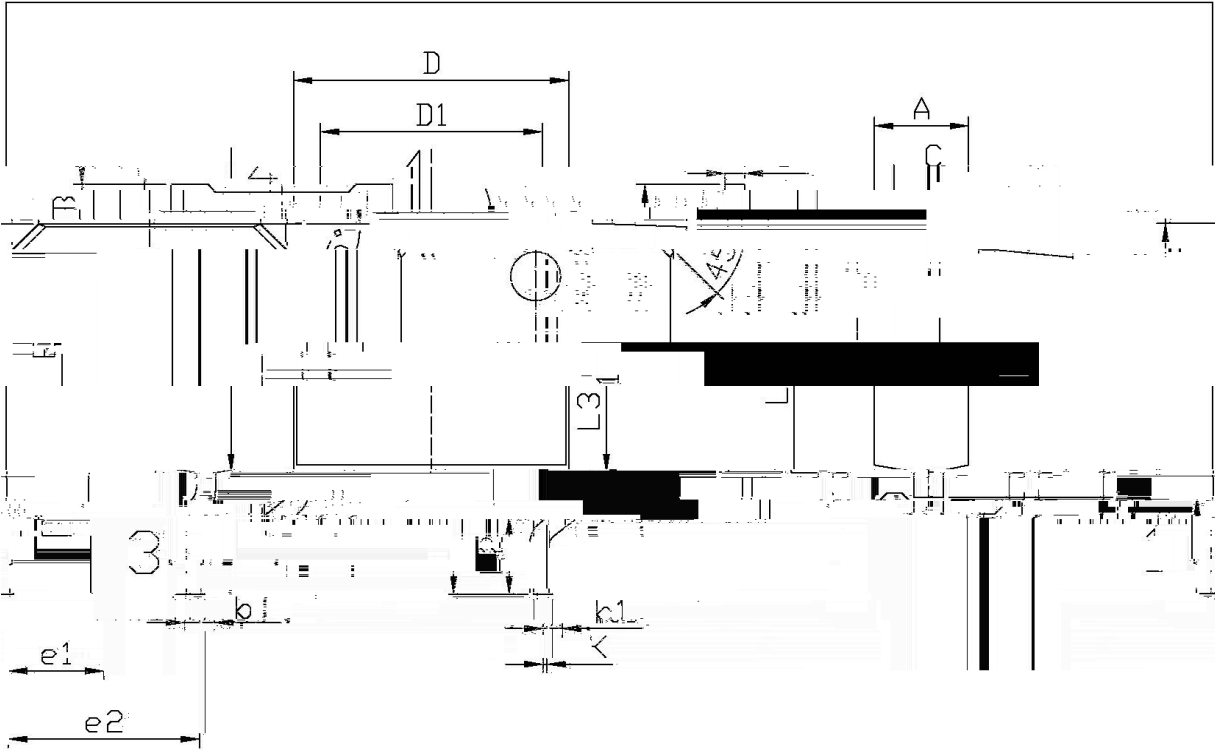

单位: mm


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
6.25	A	2.20	2.40	E	5.95
2-34	R	95	1.25	e1	2.24
4.63	0.73	0.70	0.70	0.70	0.70
0.45	0.55	L1	9.85	10.35	51
0.45	0.55	0.55	J2	1.70	2.00
0.60	0.90	0.90	P	6.45	6.75
0.00	0.10	0.10	D1	5.10	5.50

/ Marking Instructions

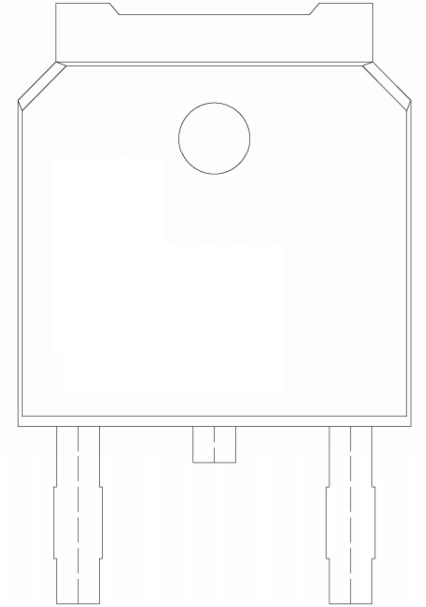

BR
B772D
P: h_{FE}

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

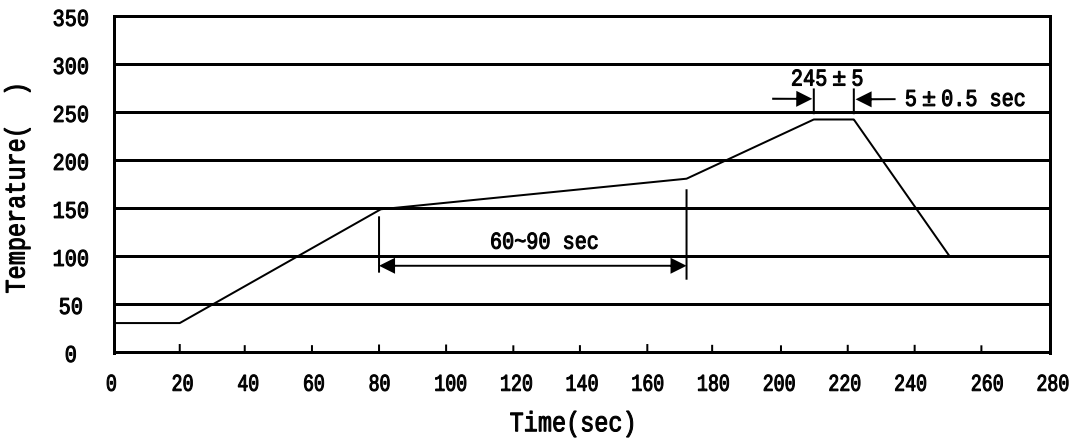

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices