

/ Descriptions


TO-126F NPN

/ Features

V_{CEO} 60-80W 2SA1358

/ Applications

/ Equivalent Circuit



/ Pinning









/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

	℃		
			℃
			℃

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

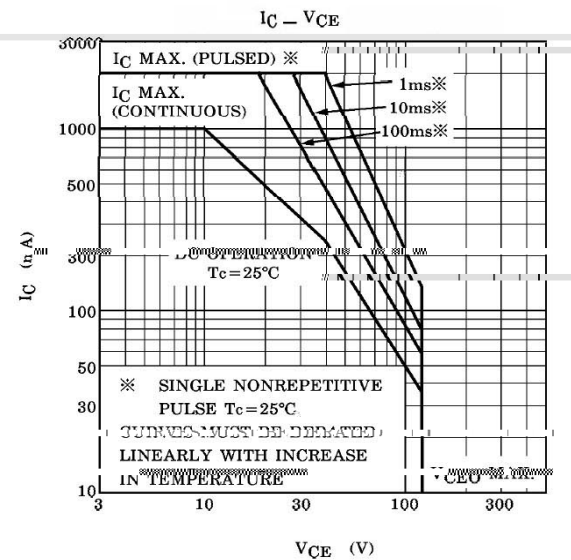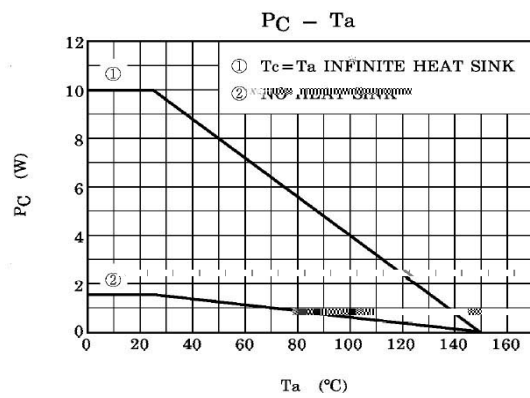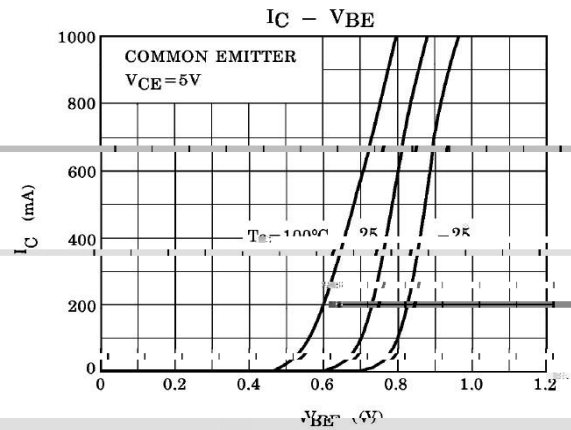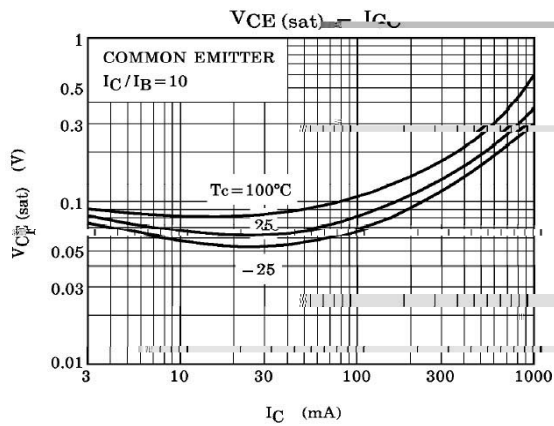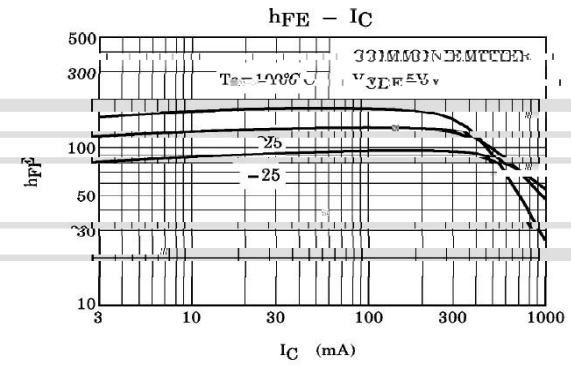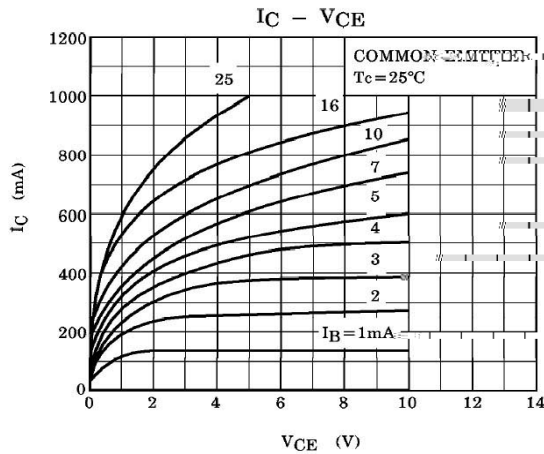


/ Package Dimensions

1U-126T


单位: mm

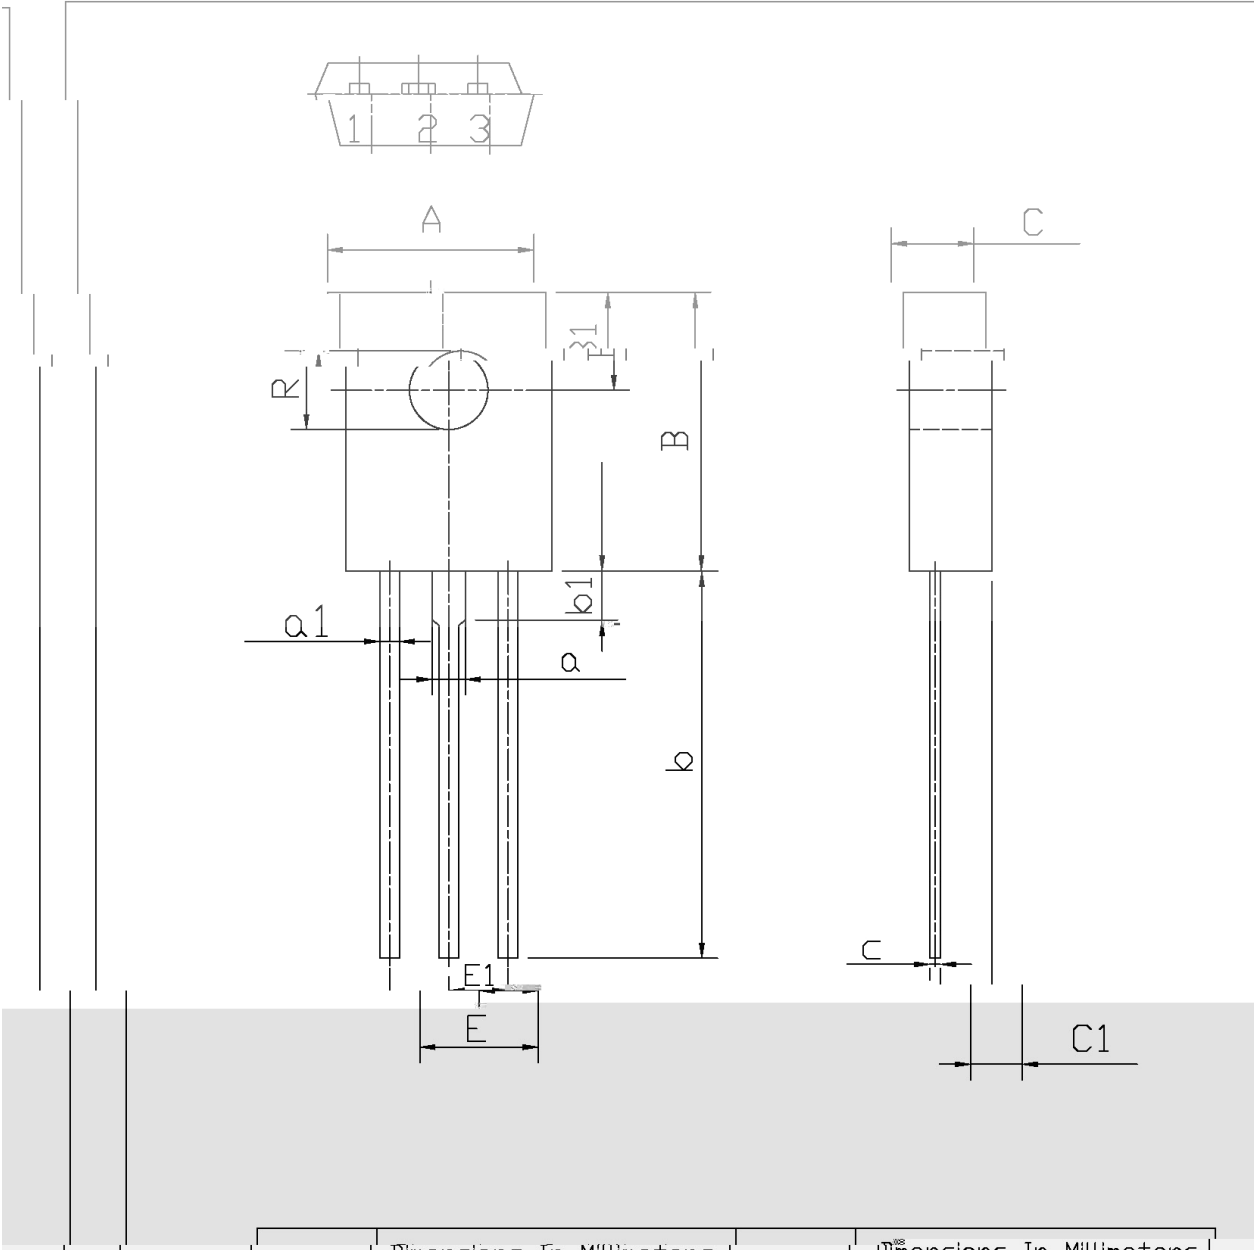

Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	7.8	8.2	a1	0.55	0.85
B	10.8	11.2	E	4.4	4.8
B1	3.8	4.2	C	3.1	3.3
R	2.95	3.15	C1	1.9	2.1
b	14	16	c	0.3	0.6
b1	1.9		a	1.27	
E1	2.1	2.5			

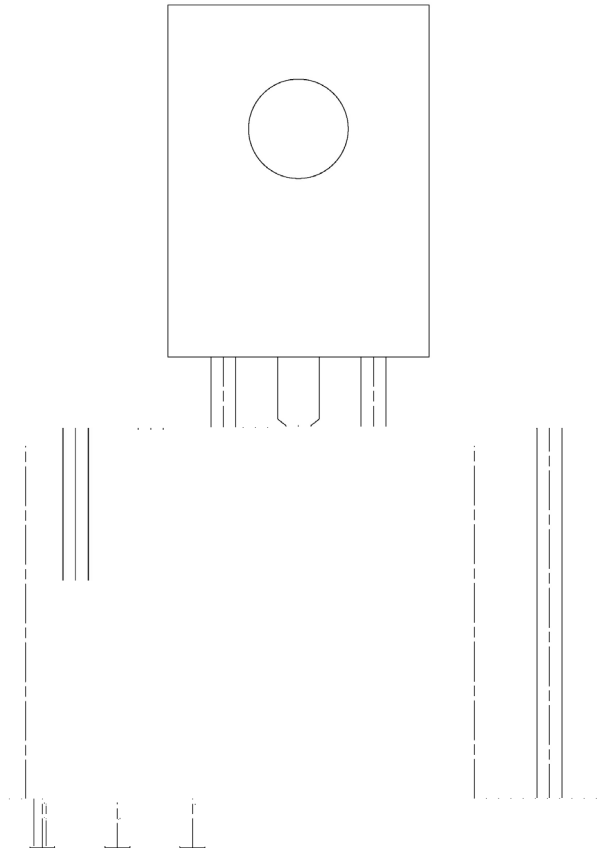

() / Temperature Profile for Dip Soldering(Pb-Free)

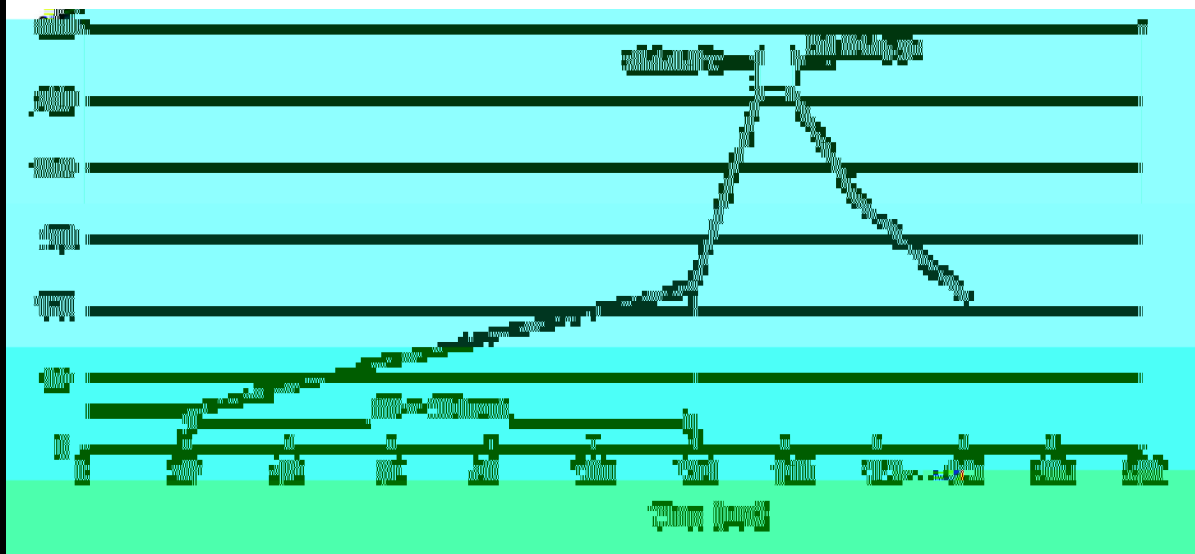 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

°C

/ Packaging SPEC.

表形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
126/F	500	6	3,000	5	15,000	135×190	237×172×102	560×245×195

表形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
26/F	65	26	1,690	5	8,450	532×31×5.6	555×164×50	575×290×180