


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking



/ Absolute Maximum Ratings(Ta=25)

		~	


“ ”

						μ
						μ



/ Electrical Characteristic Curve

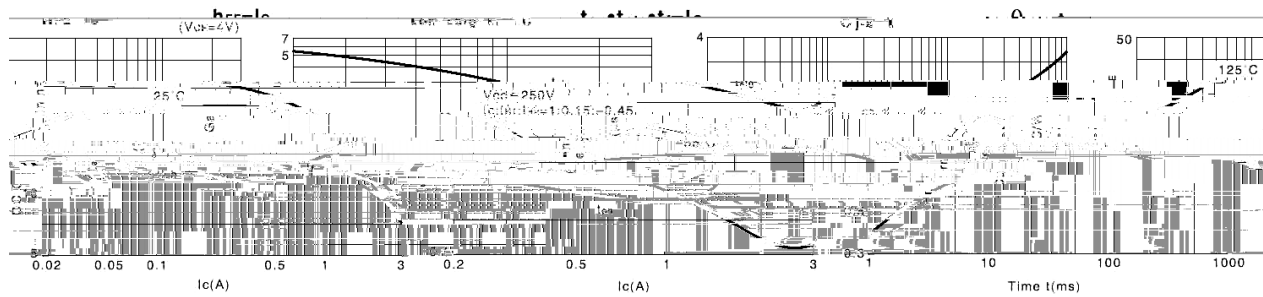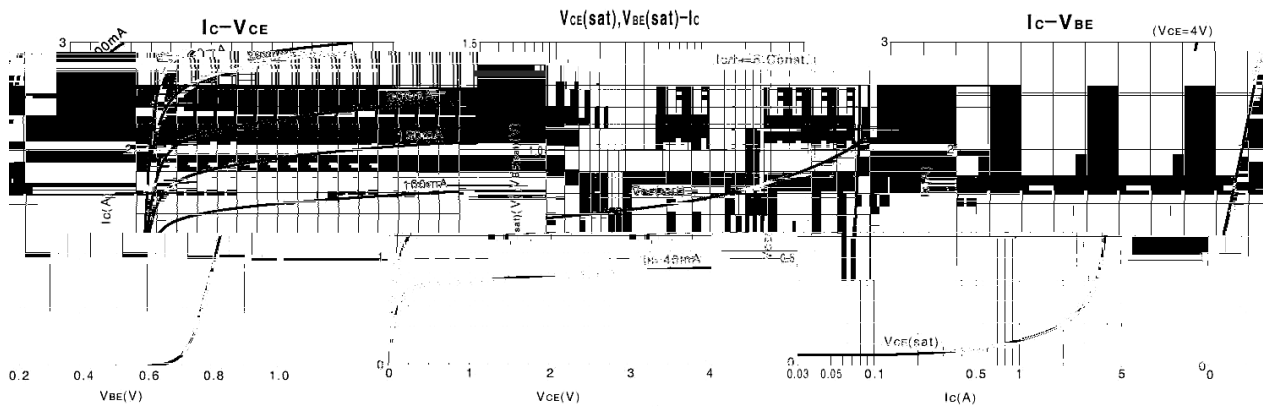


Safe Operating Area (Single Pulse)

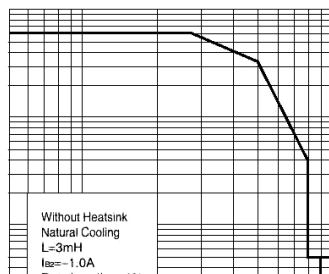

Reverse Bias Safe Operating Area

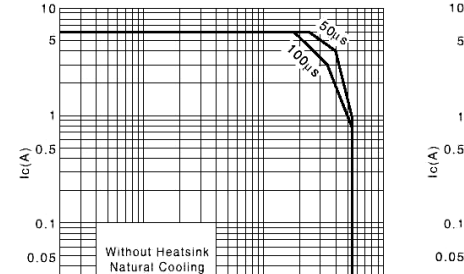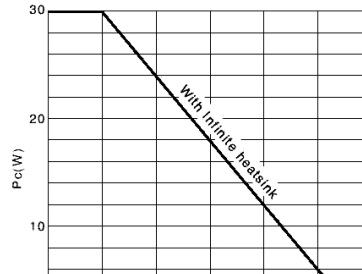


/ Package Dimensions

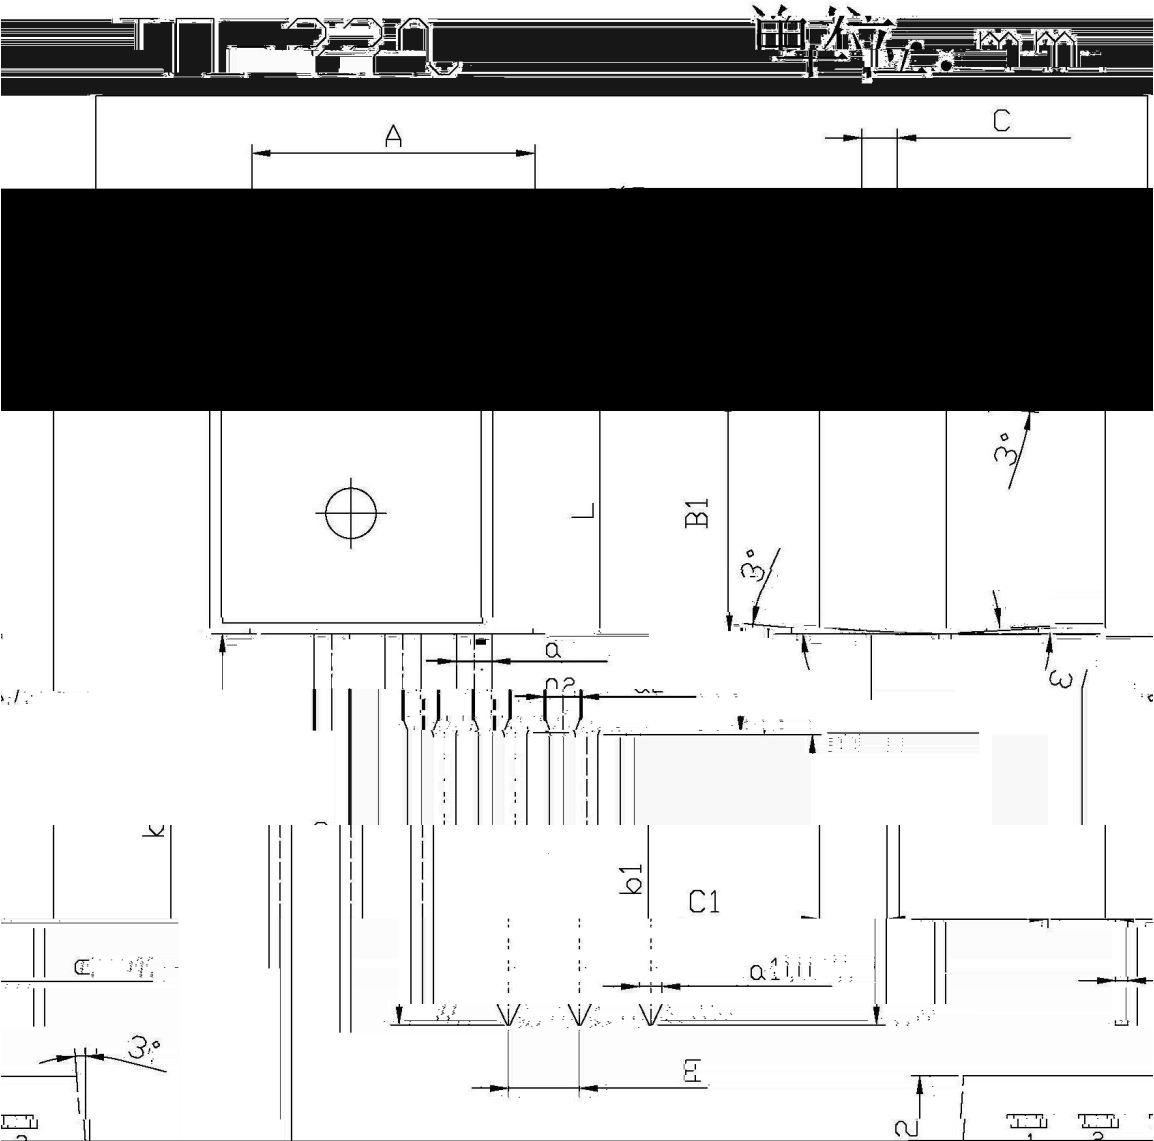


Symbol	Dimensions in Millimeters		Symbol	Dimensions in Millimeters		
	Min	Max		Min	Max	
	9.4	9.8		10.2	1.2	1.4
	7.5	8.6		3.0	4.7	5.0
	1.0	1.5		16.1	B1	9.0

/ Marking Instructions

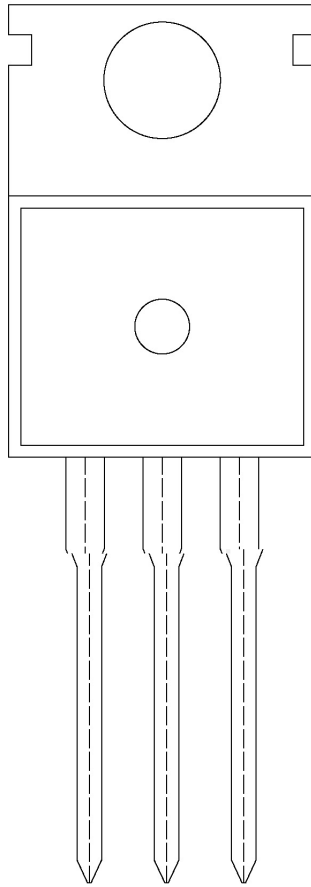

() / Temperature Profile for Dip Soldering(Pb-Free)

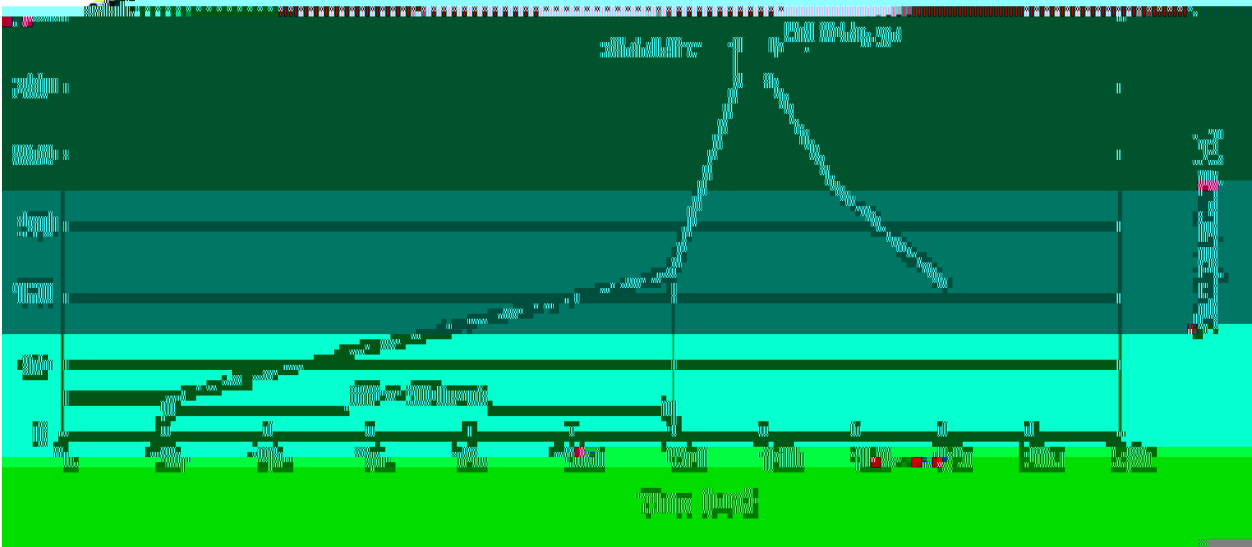

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices