

2SC5248

/ Descriptions

TO-220F NPN


/ Features

h_{FE} , , , , 2SA1964

/ Applications

(,)

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking


	℃		
			℃
		~	℃

3142 Á °{


/ Electrical Characteristic Curve

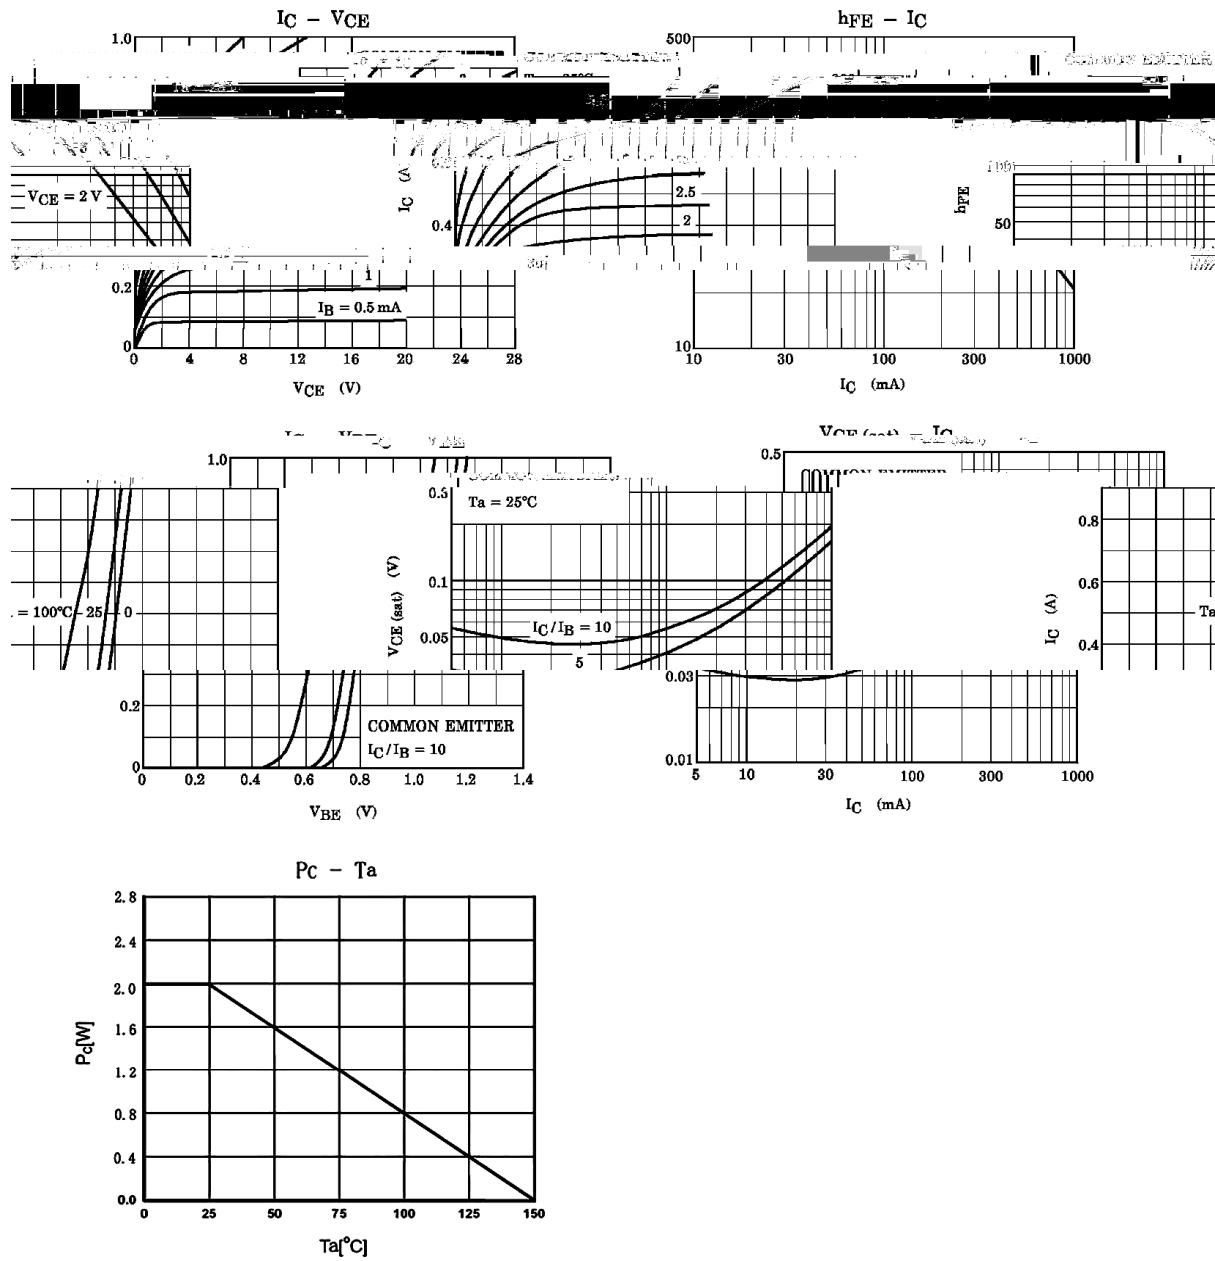

/ Package Dimensions

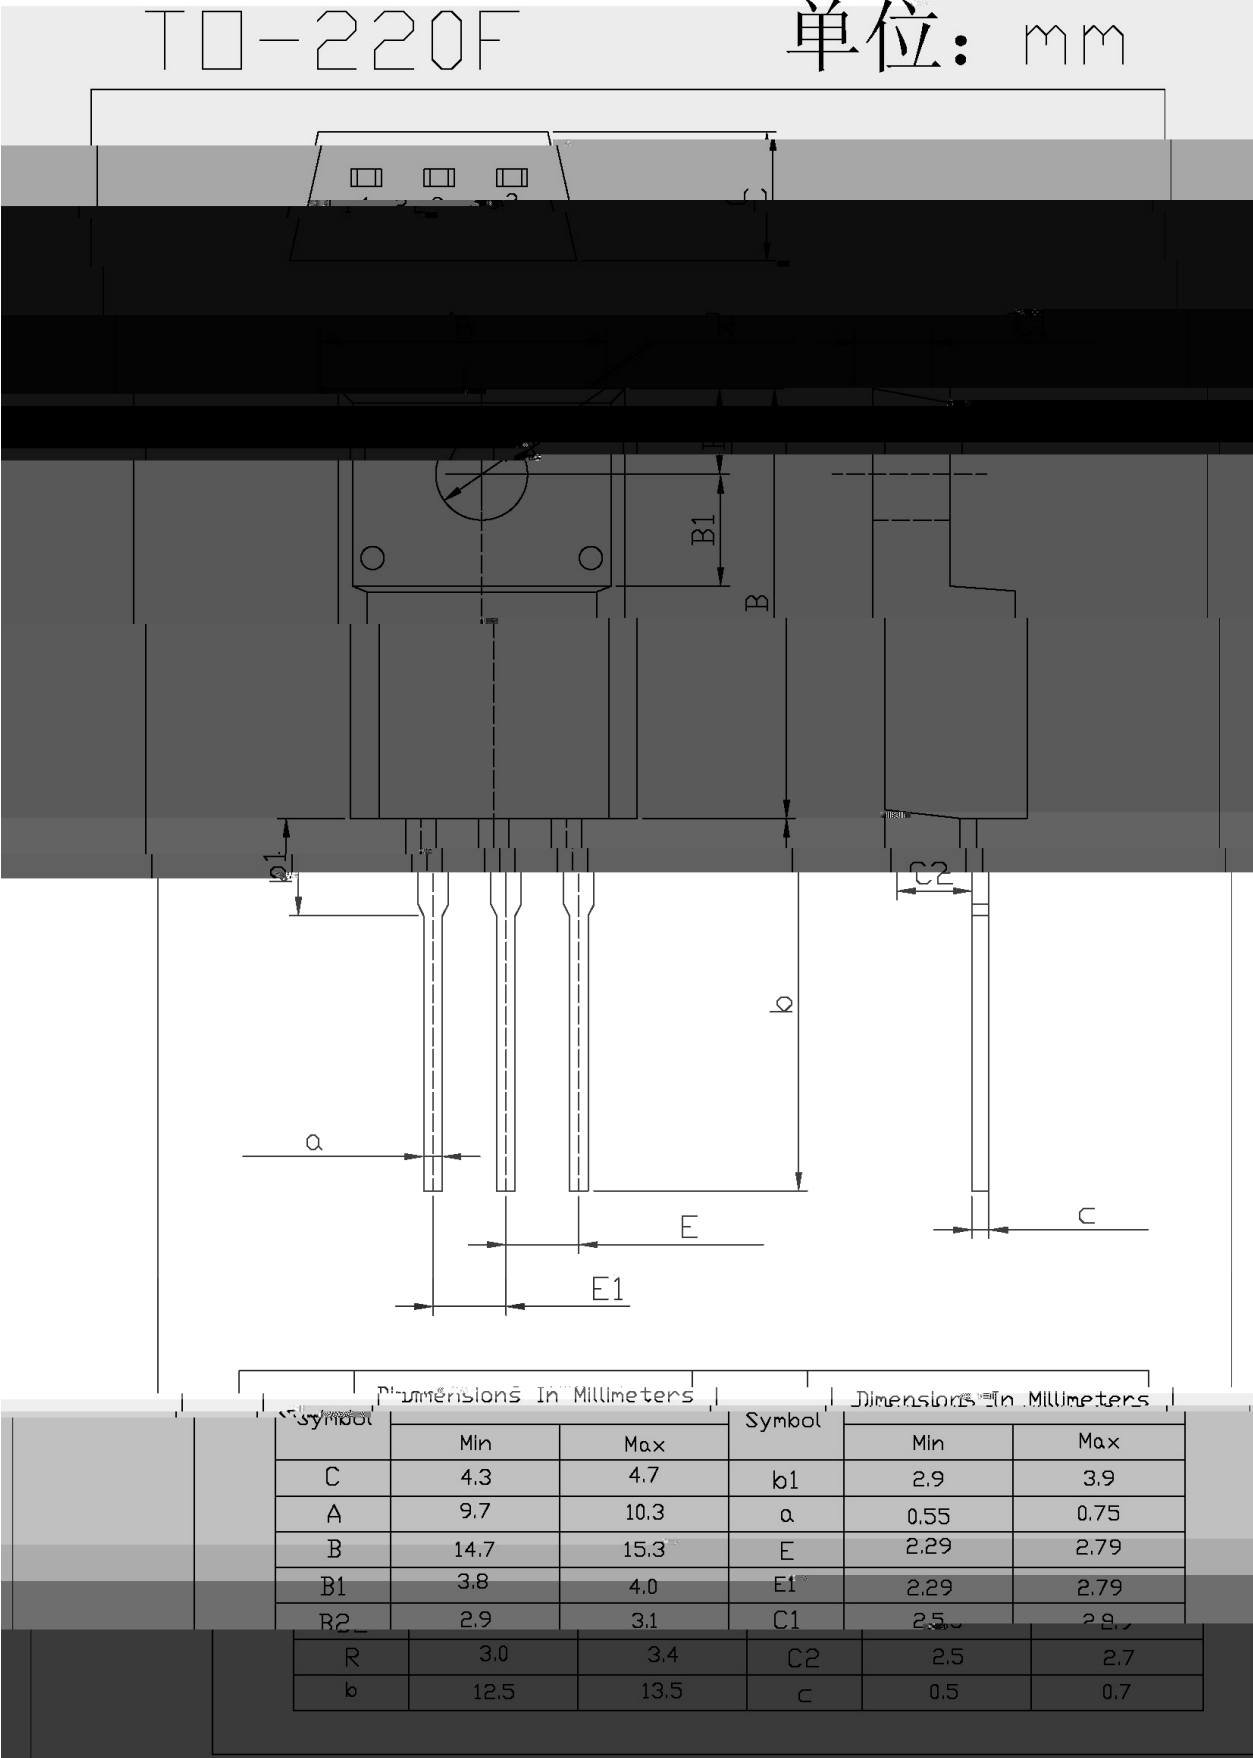


/ Marking Instructions

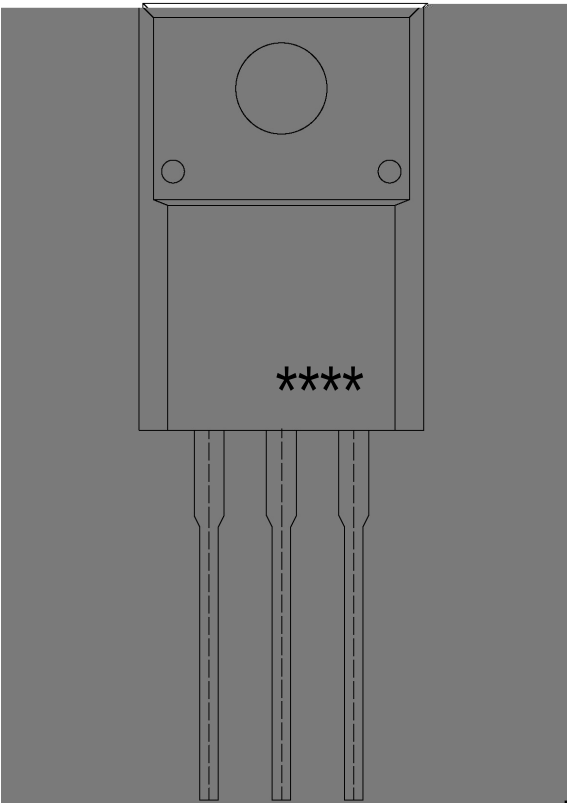

C5248

D:

() / Temperature Profile for Dip Soldering(Pb-Free)

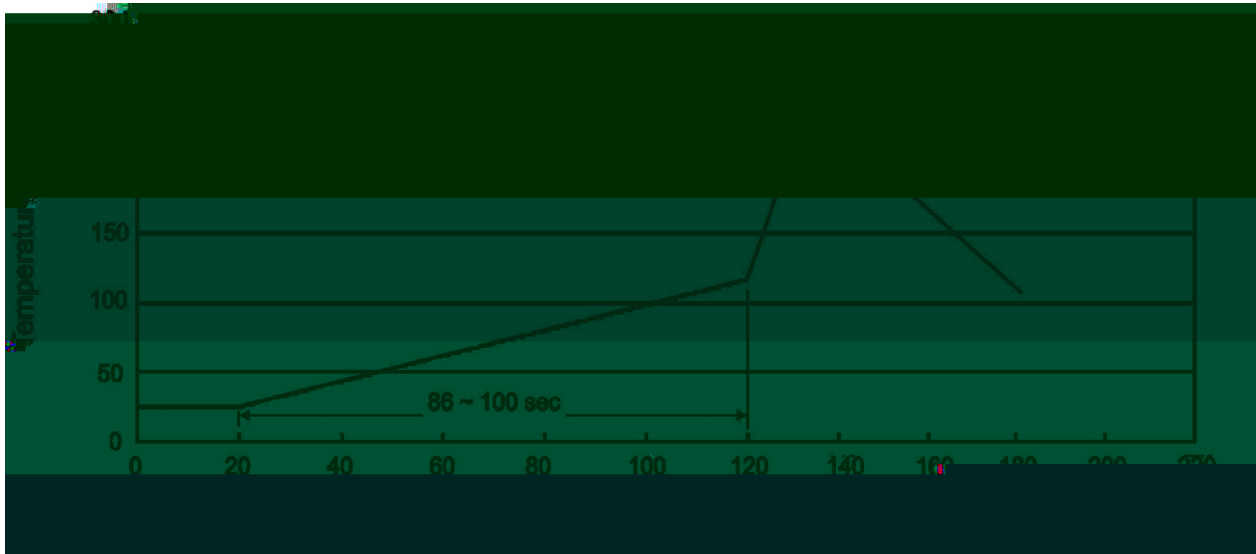 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

°C

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices