


/ Descriptions


/ Features

/ Applications

/ / Equivalent Circuit or Application Circuit

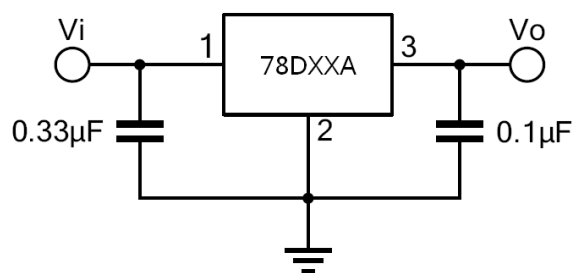

/ Pinning


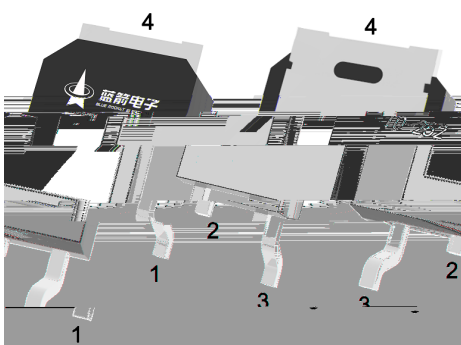


/ Marking


/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Vi=23V,Io=500mA,Tj=-30 ~125 ,unless otherwise specified

/ Electrical Characteristic Curve

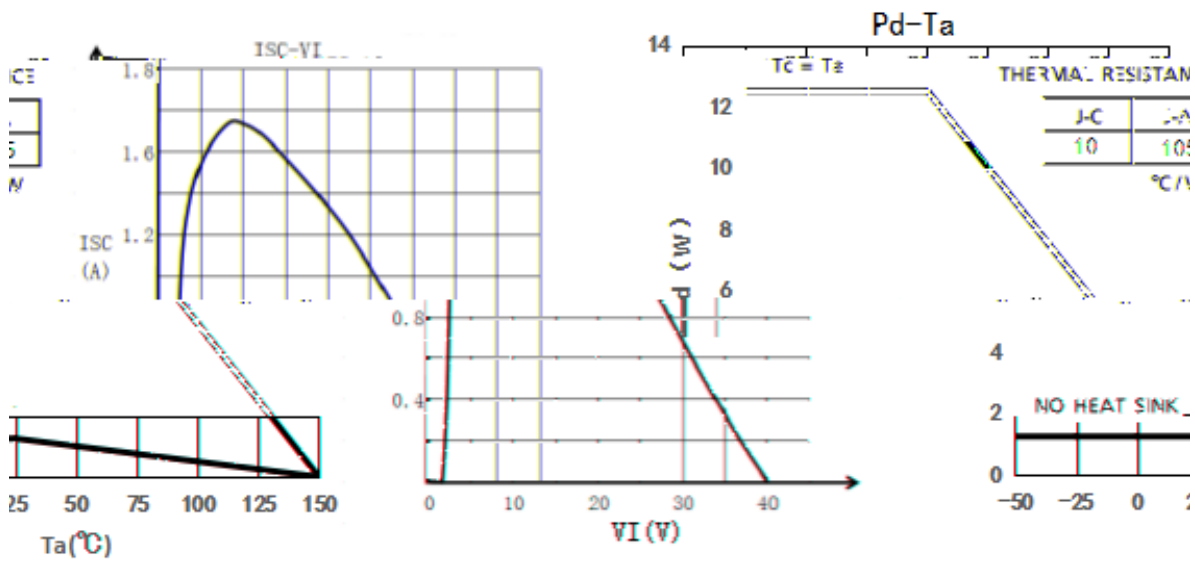


/ Package Dimensions

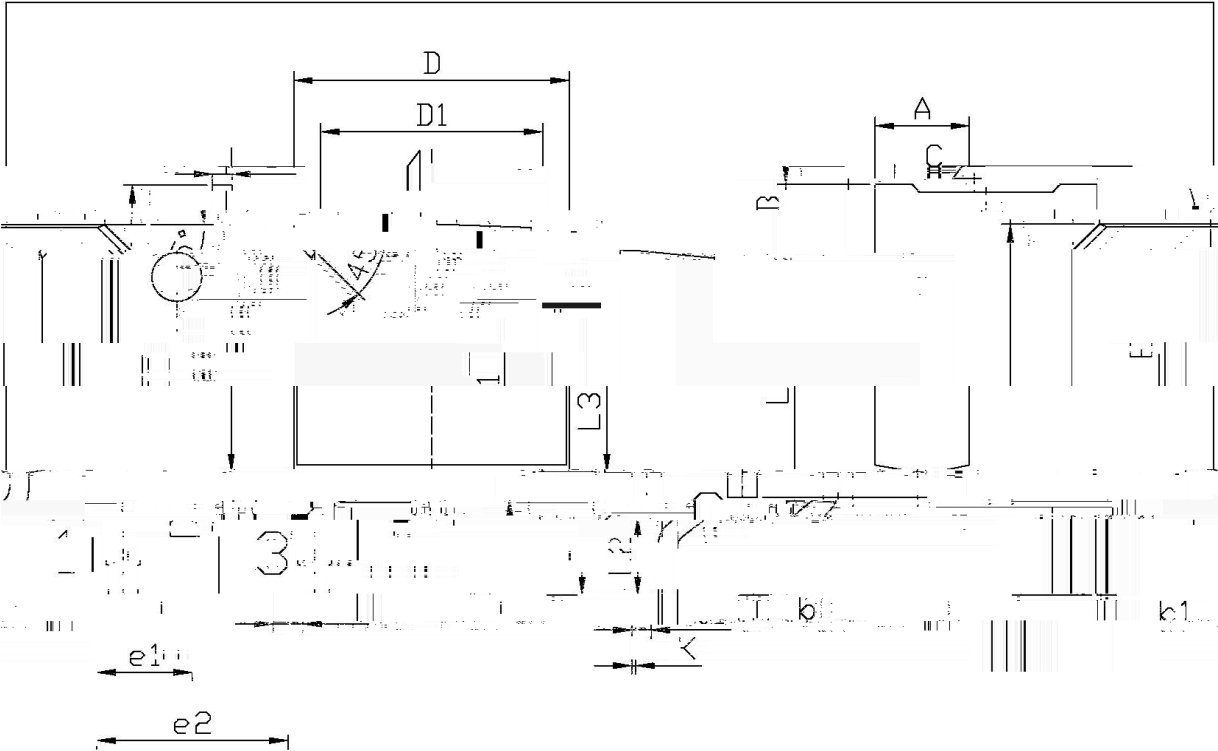


单位: mm

Symbol	Dimensions In Millimeters	Symbol	Dimensions In Millimeters
A	Min	A	Max
5.95	6.25	2.20	2.40
2.24	2.32	0.95	1.25
0.45	0.55	10.35	b1
0.60	0.90	6.45	6.75
0.00	0.10	5.10	5.50

/ Marking Instructions

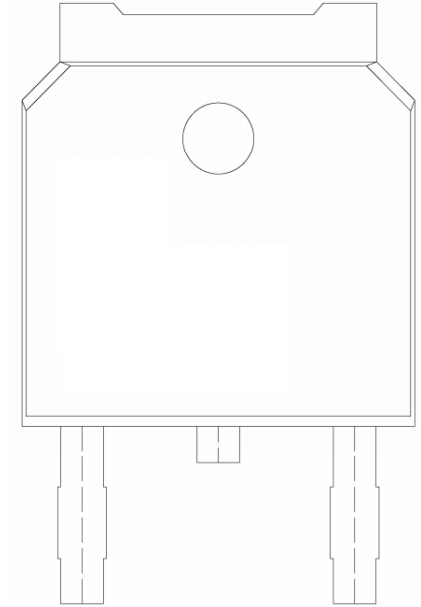

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

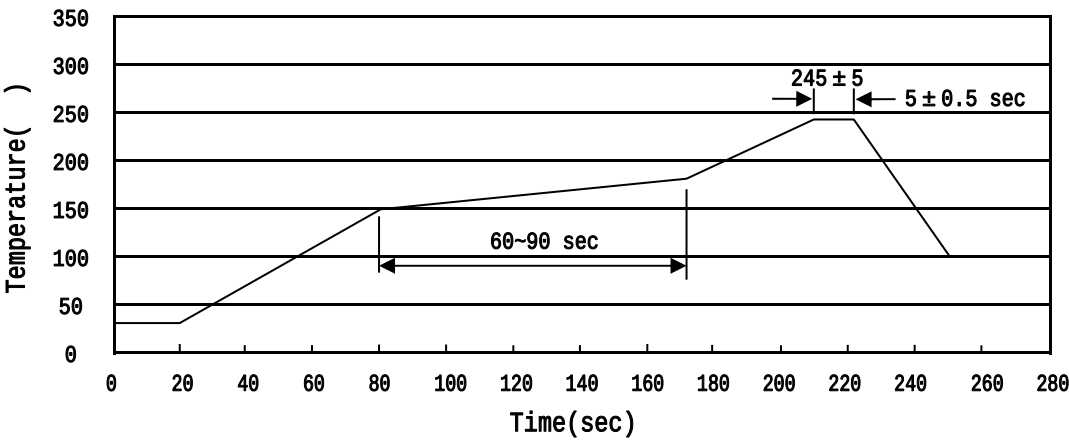

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

78D15A



DATA SHEET

/ Notices