


78L05T

Rev.J Mar.-2026



DATA SHEET

SOT-89

Voltage Regulator in a SOT-89 Plastic Package.

100mA,

3-Terminal regulators ,output current up to 100 mA, internal thermal overload protection and short-circuit limiting, HF Product.


Voltage Regulator.

/

*
*

Parameter	Symbol	Rating	Unit
Input voltage	V_I	30	V
Output current	I_O	100	mA
Operating Temperature Range	T_{OPR}	-40 125	
Power Dissipation	P_D	500	mW
Storage temperature range	T_{stg}	-55 150	
Thermal resistance junction-ambient	$R\theta$		


/ Electrical Characteristic Curve

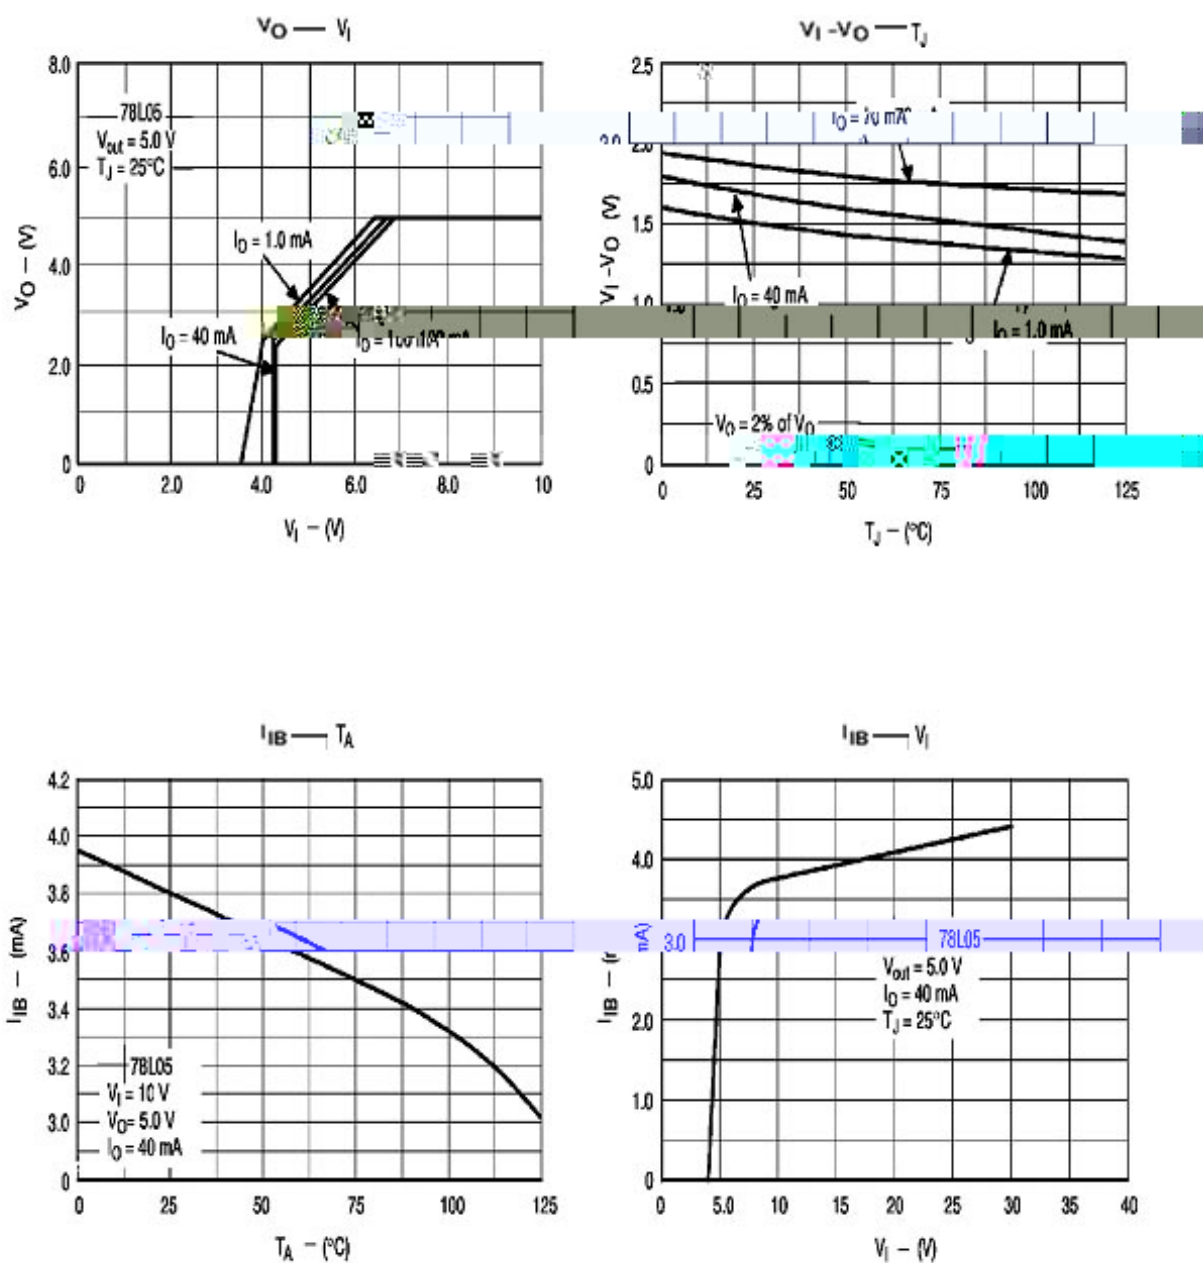


/ Package Dimensions

SOT-89


单位: mm

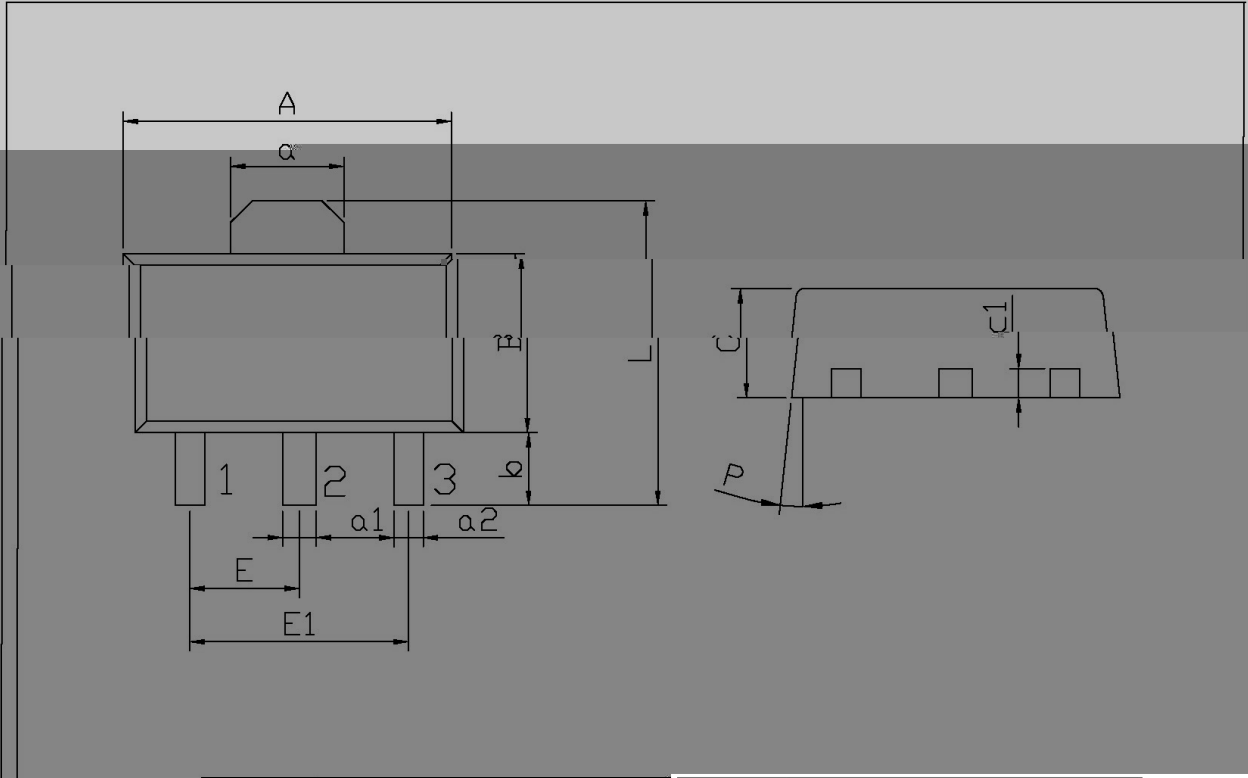

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	4.4	4.7	a1	0.36	0.56



/ Marking Instructions

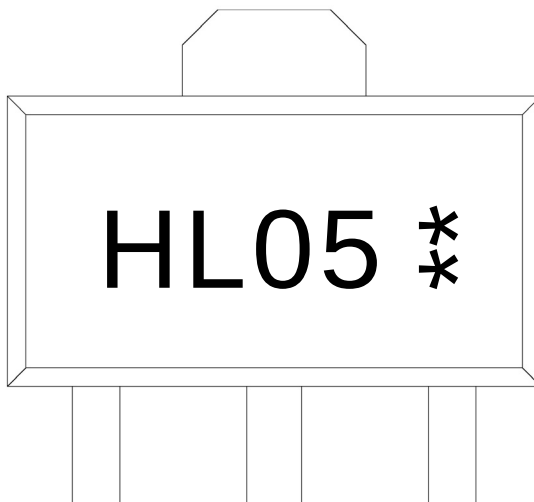

H

L05

**


Note:

H: Company Code

L05: Product Type Code

** : Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

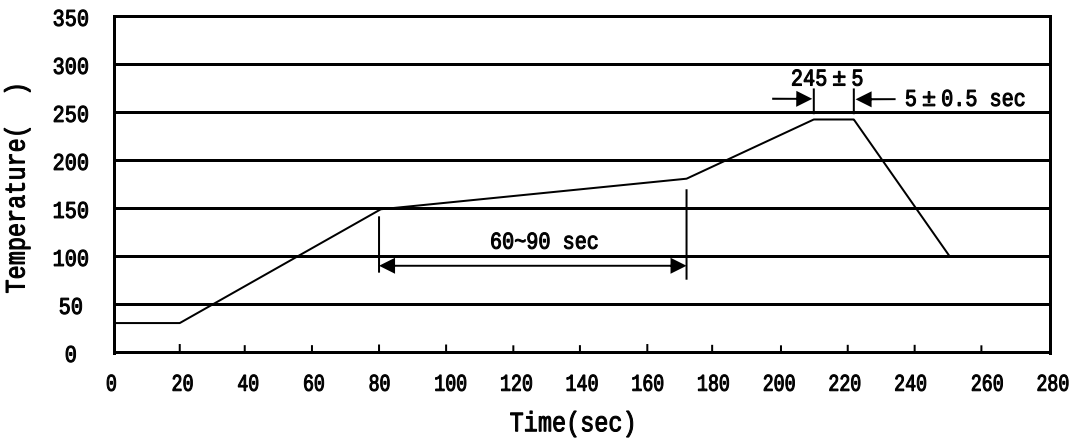

Note:

- | | | | | | |
|---|-------|-----|----|-----------|---|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180 , Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
SOT-89	1,000	7	7,000	6	42,000	7 ×12	180×120×180	390×385×205

/ Notices