


/ Descriptions


/ Features

/ Applications


/ Equivalent Circuit



/ Pinning



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)



/ Marking


/ Absolute Maximum Ratings(Ta=25 –)

	θ							
	θ							

/ Electrical Characteristics(Ta=25 –)


				μ

/ Electrical Characteristic Curve

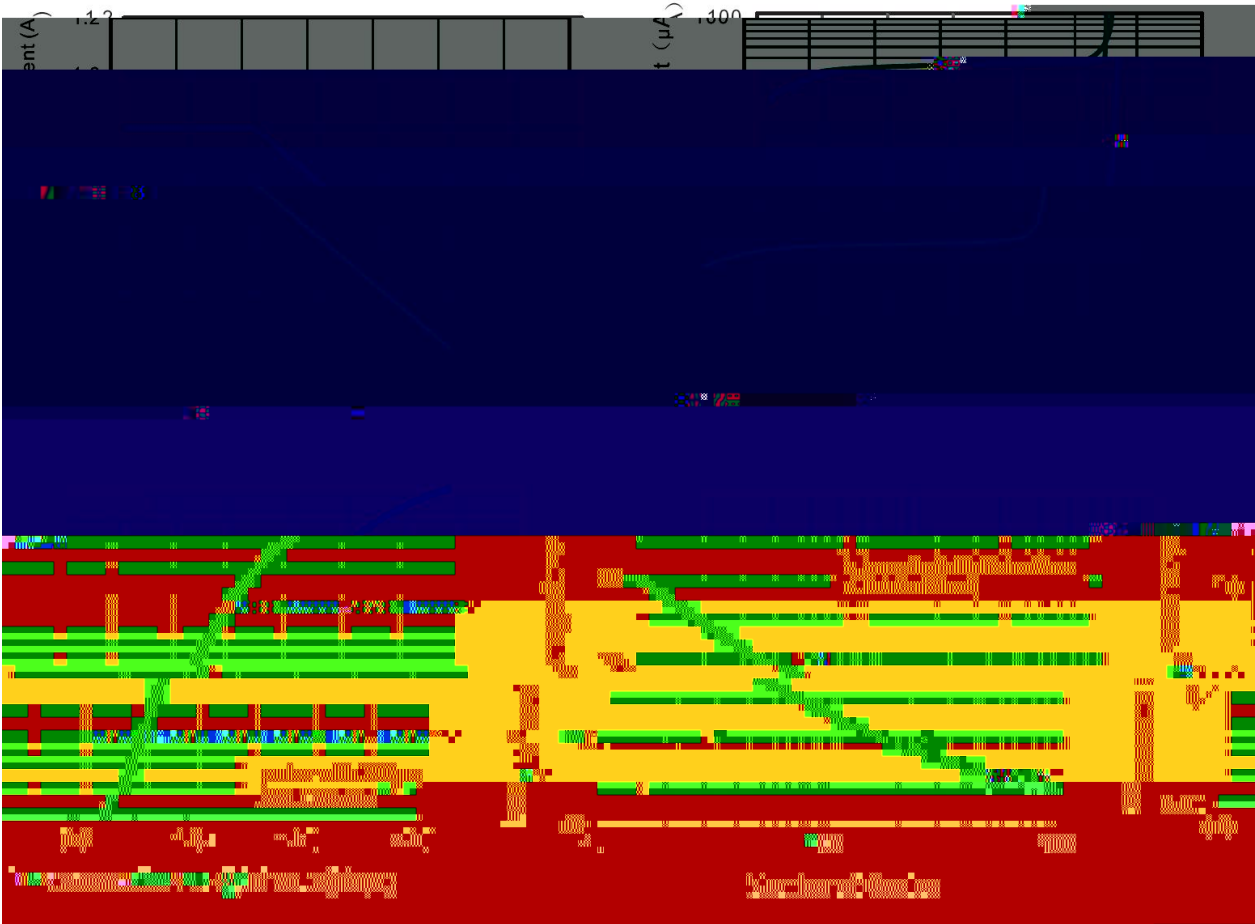

/ Package Dimensions


ABS/LBF

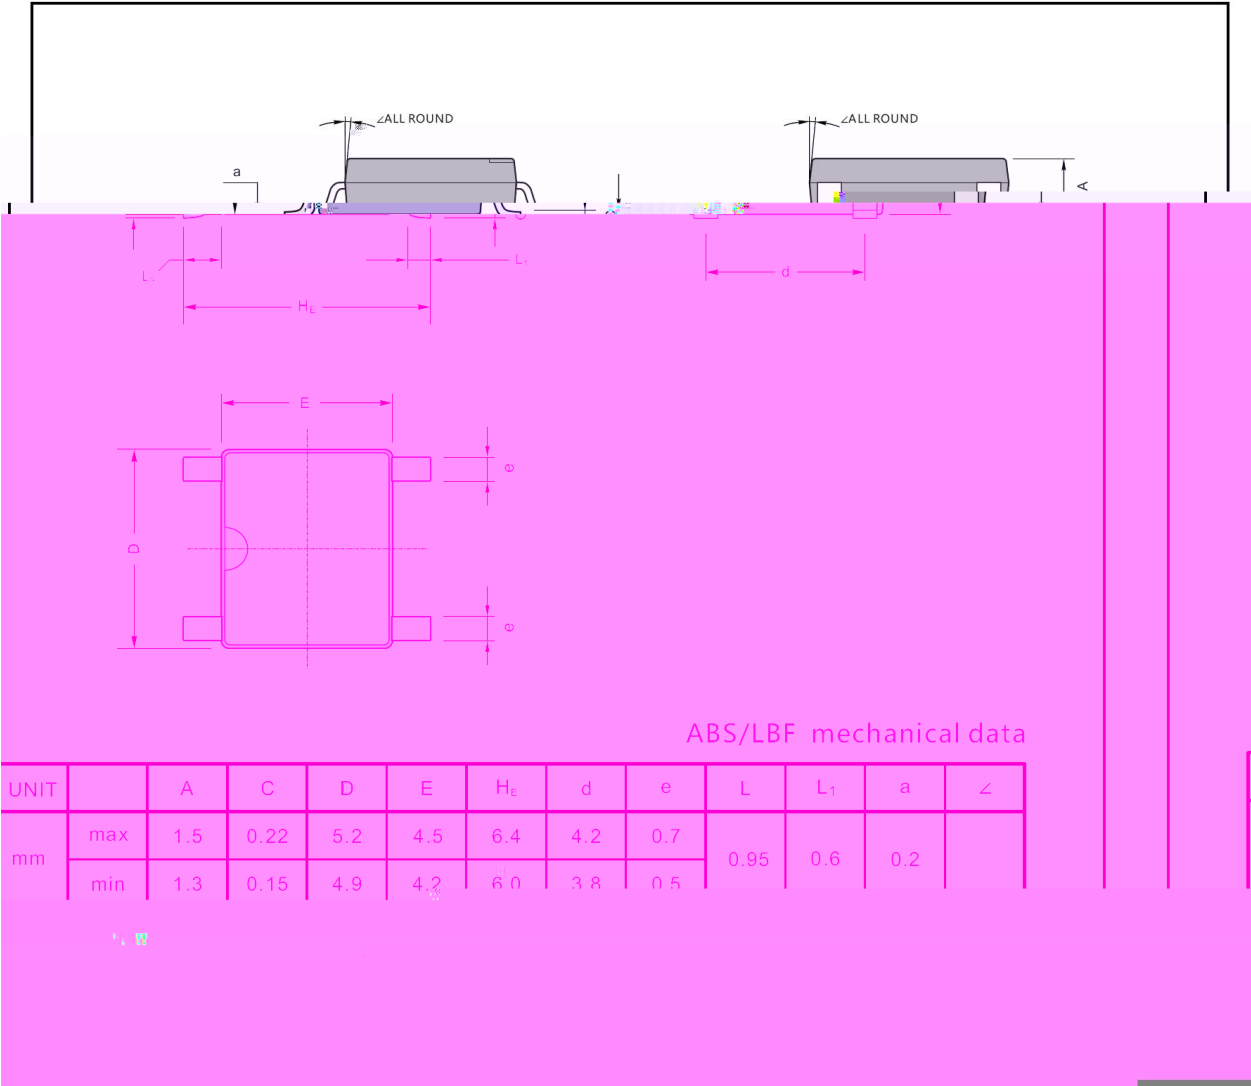


/ Marking Instructions

Marking


Type number	Marking code
ABS1	ABS1
ABS2	ABS2
ABS4	ABS4
ABS6	ABS6
ABS8	ABS8
ABS10	ABS10

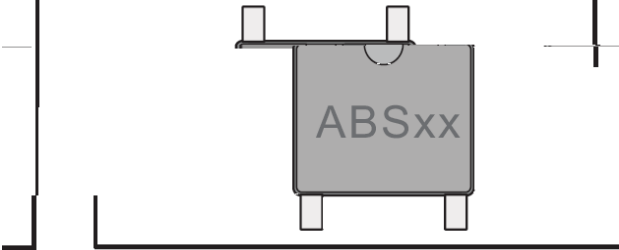

/ Marking Instructions

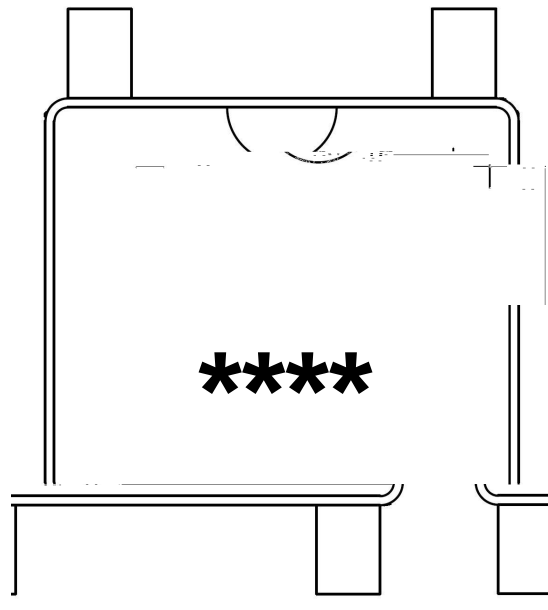

() / Wh p shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0lueh,

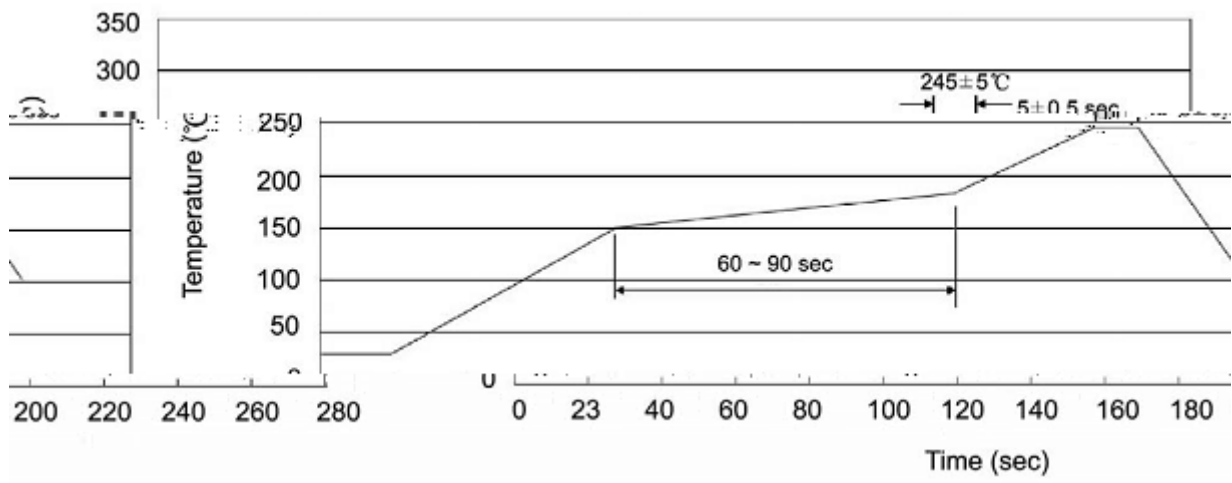

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
ABS/LBF								

/ Notices