



!"#\$%&'()#####



A	2020-7-22	ALL			




!"#\$%&'() () #####

789': (; #
7<<45=#9<5> #<=#?#7 8 9': (;#@&?1<4#@?4A?B !#

C5 / #053 / ?3># 5&+?B #>35 ,D# E%?3>#3<=B#45=1+3%4+<5=#053#+3?=1< =+@35+ 4+<5=! F<B*#G5=>%4+?=4 D#"&15#
" ?&?2& #<=#C ?>#H3 #I 3!<5=!#FH#@35>%4+!#
#

7<<45=#><5> !#
#



@JK:-G?+*5> # # @JK(-"=5> #
#

#

L5> &#	M)N()O#	M)N;)O#	M)NP)O#
L?3A<=B#	F79#	F7Q#	F7H#

*+, -.. / / /!0123 4!456## # # # # # # # # # # # # # # #




```
*++,-./ / //0!23 4!56## # # # # # # # # # # # # # #
```



!"#\$%&'()#####

#



#

*+, -./ / /!0123 4!456## # # # # # # # # # # # # # # # #


!"#\$%&'()#####



!"#\$%&'()*#####

#

Temperature Profile for IR Reflow Soldering(Pb-Free)

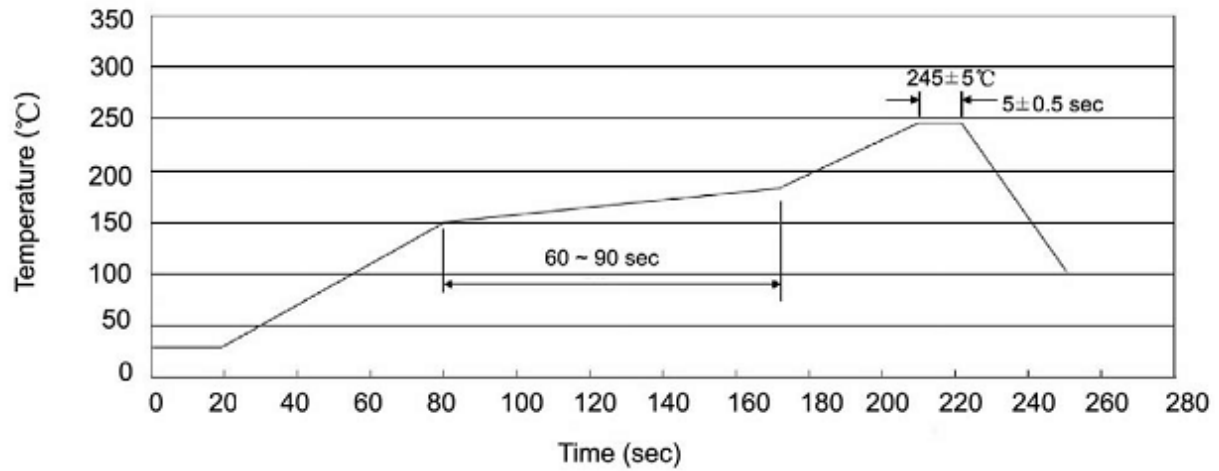

说明:#####K5+ -#

:、预热温度:(N)~:(V)°C,时间`~\_)1 4# # :!@3 \* ?<=B-:)N\:(V)°C#X<6 -`) _)1 4!#

(、峰值温度:(PN±N°C,时间持续为N±)!N1 4# # (!@ ?A#X 6 ,!-(PN±N°C#9%3?<5=-N±)!N1 4!#

;、焊接制程冷却速度为(~:)°C.1 4!# # # # ;! G55k<=B#7, >#(\:)°C.1 4!#

#

#

温度:(`)±N°C# # 时间:(: )±:#1 4!# # # X 6 ,!-(`)±N°C# # X<6 -:)±:#1 4#

#

卷盘包装### QQC#

@?4A?B #XR, # #	S<+1 #					9<6 =1<5=# # T%=<+ 6 6`U#		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SOD-123	3,000	10	30,000	6	180,000	7" x8	180×120×180	390×385×205

#

#

#

*+, -.. / / /!0123 4!456## # # # # # # # # # # # # # # # # # #