


BAV56W



DATA SHEET

VRW0656 M M æ M ç ¨ 1

M ñ i Æ Ñ ý ð i ` M ç y * b ç ¨ 783pD

ç Æ Æ Æ Æ Æ

Æ Æ Æ Æ Æ / Equivalent Circuit




Æ Æ Æ / Marking

$v \text{ } \ddot{Q}$	$\gamma \text{ } ^N$	$\ddot{Q} \ddot{\Theta}$	$D \text{ } H$

ᐅ ᐅ	ᐅ ᐅ	ᐅ ᐅ ᐅ	ᐅ ᐅ ᐅ	ᐅ ᐅ ᐅ	ᐅ ᐅ


电 气 特 性 曲 线 / Electrical Characteristic Curve

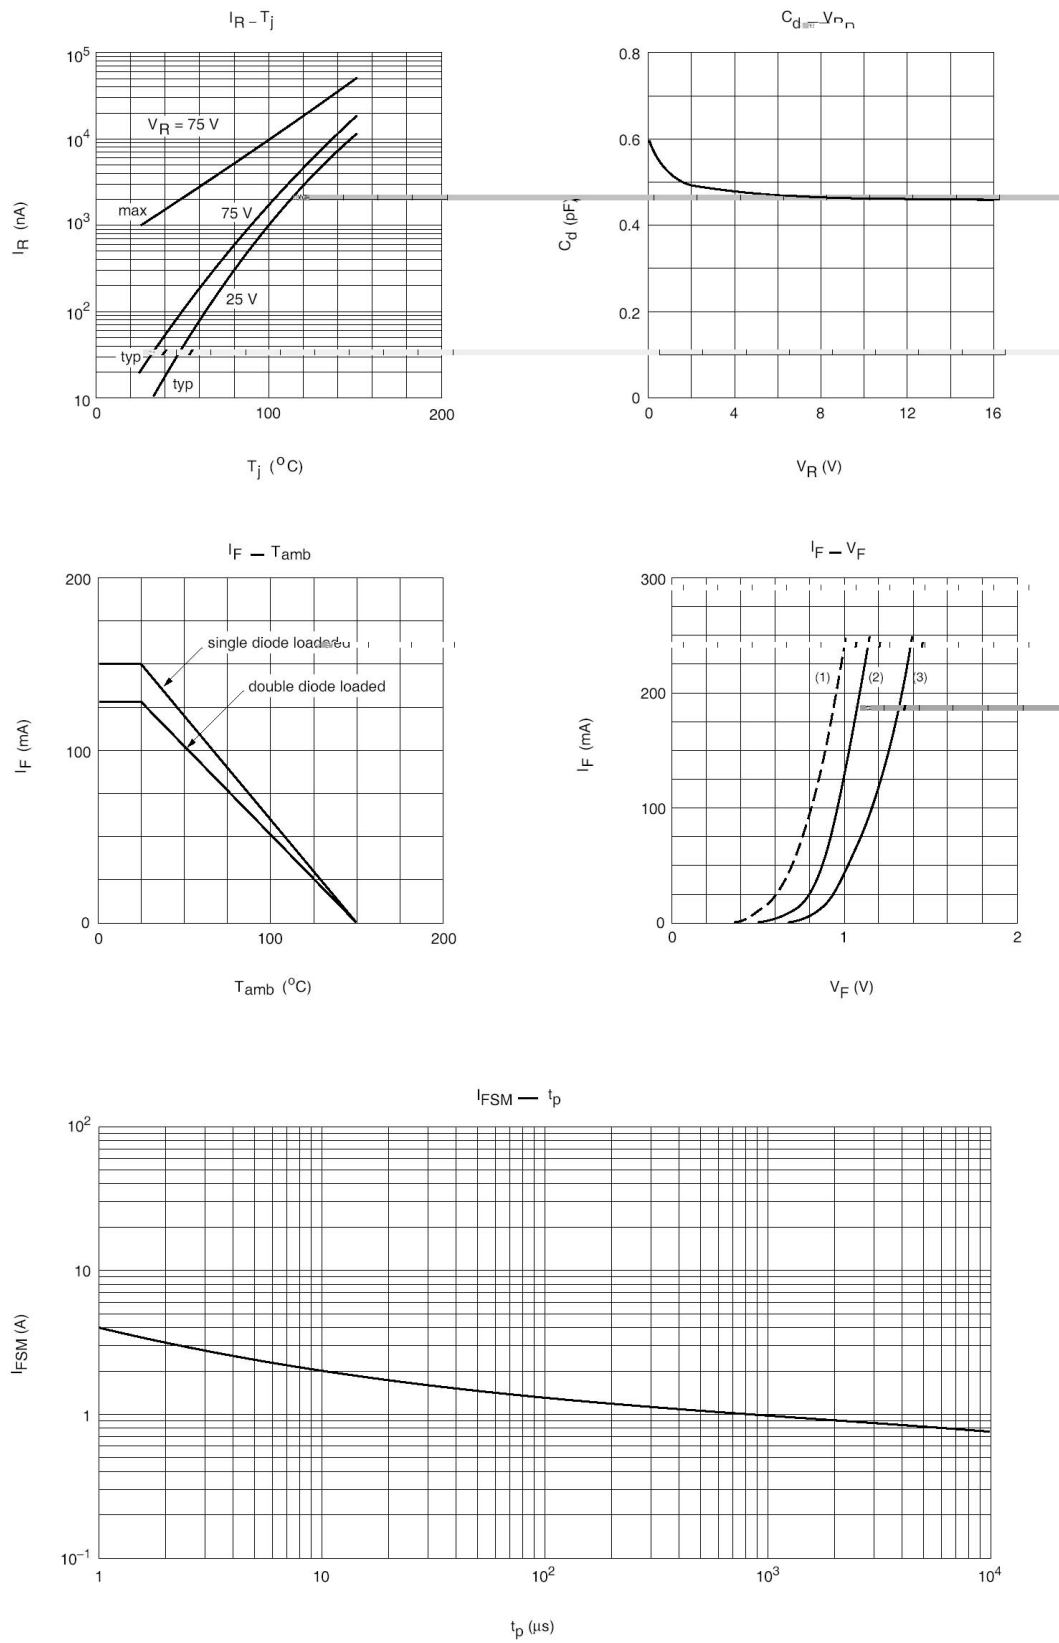

Package Dimensions


SOT-323

单位：mm

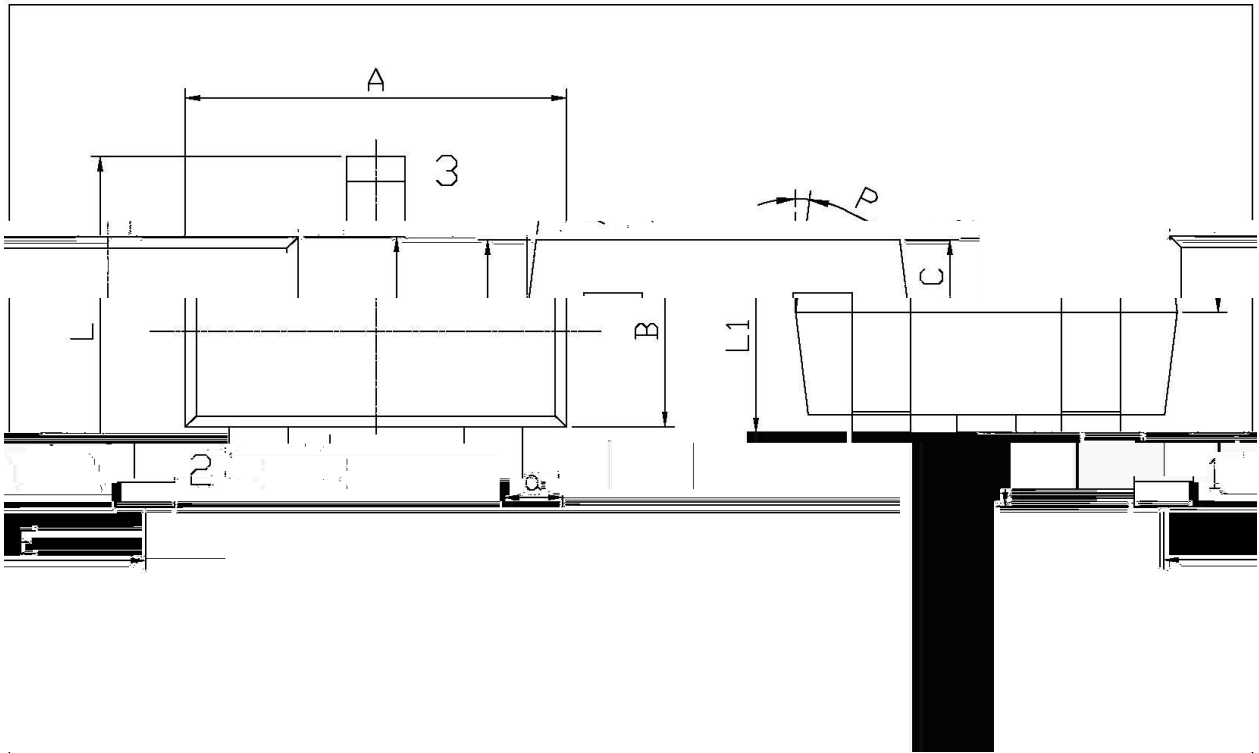

Dimensions in millimeters		Symbol		Dimensions in millimeters		Symbol	
Min	Max			Min	Max		
0	0.50	A	1.95	2.35	C	0.3	
5	1.15	B	2.00	2.2	L1	0.8	
0	0.40	a	1.20	1.40	p	0.2	

4. 符号 / Marking Instructions

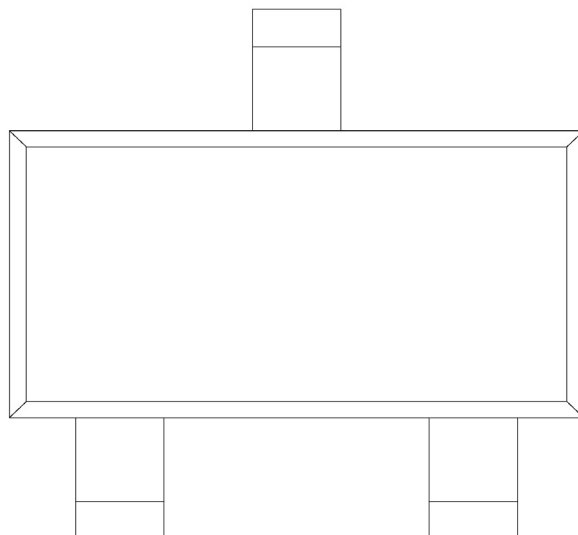


" X

K X 第 3 号

D: X 第 3 号

Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

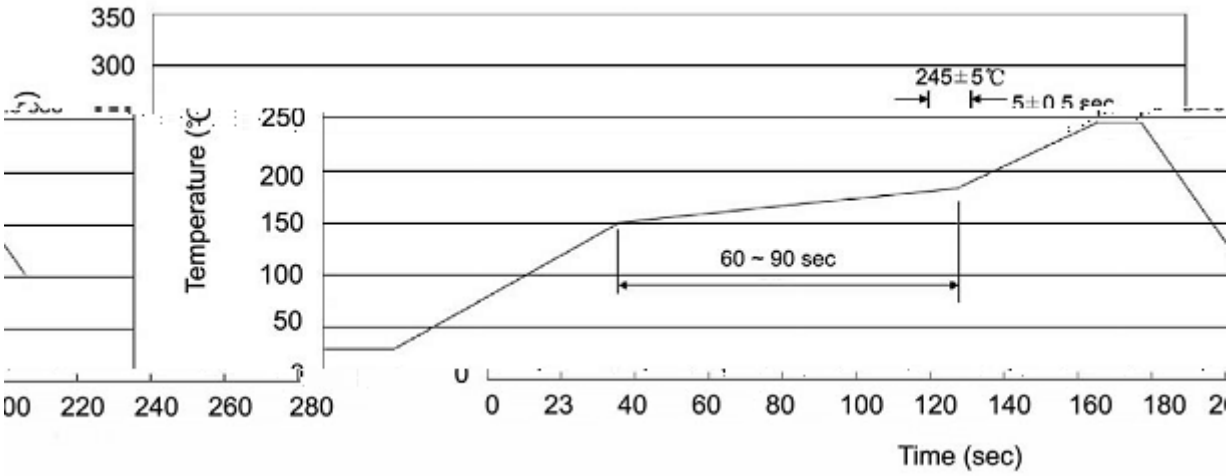

” X
 □ ŷ K † i`H K
 Š Œ □ ŷ ° † i`H      `Y ʌ ʌ °
 i` ʌ , o ŷ ʌ K †

Resistance to Soldering Heat Test Conditions

□ ŷ ʌ ° † `H ʌ °

Packaging SPEC.

o` ʌ

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

Notices