


/ Revised record

/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning







/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

			℃
		~	℃

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

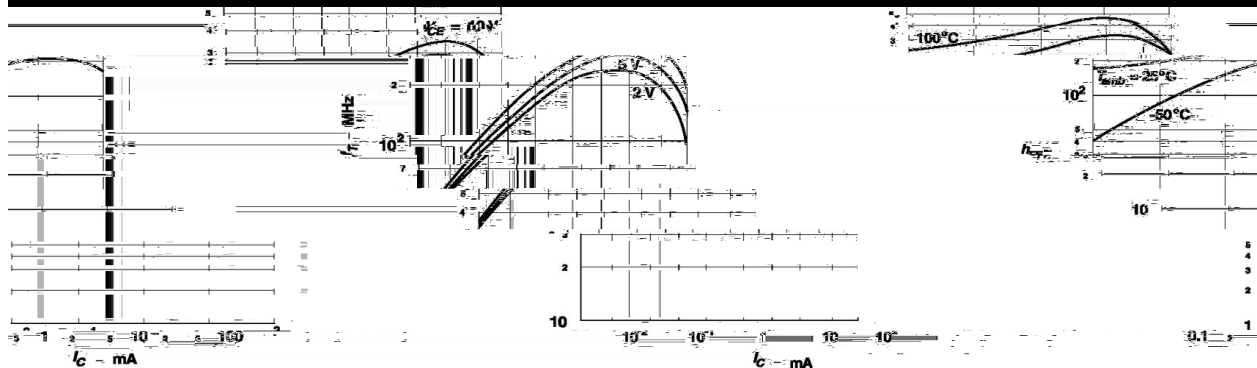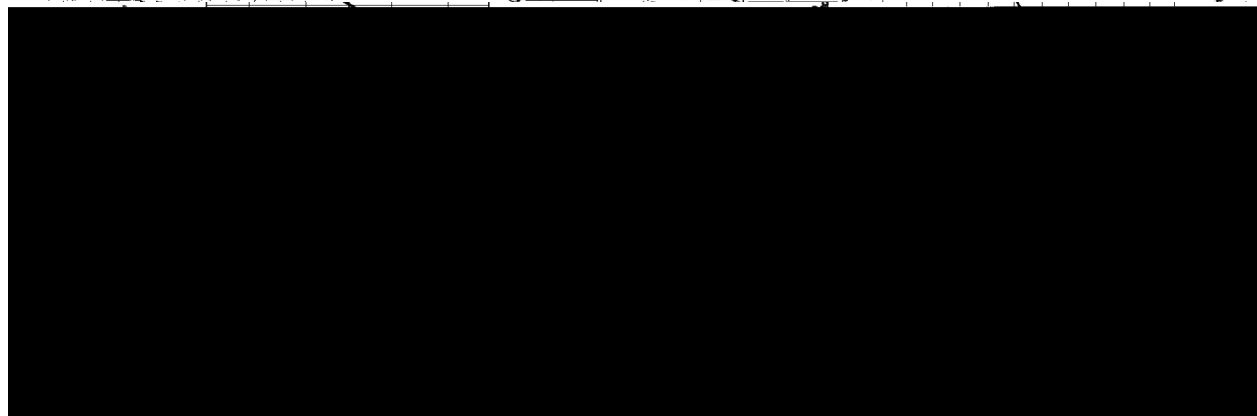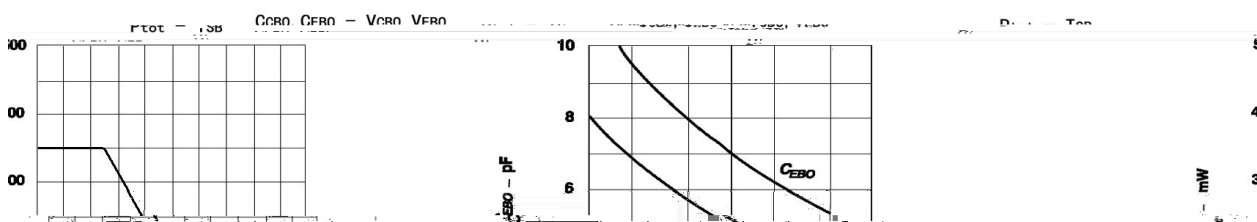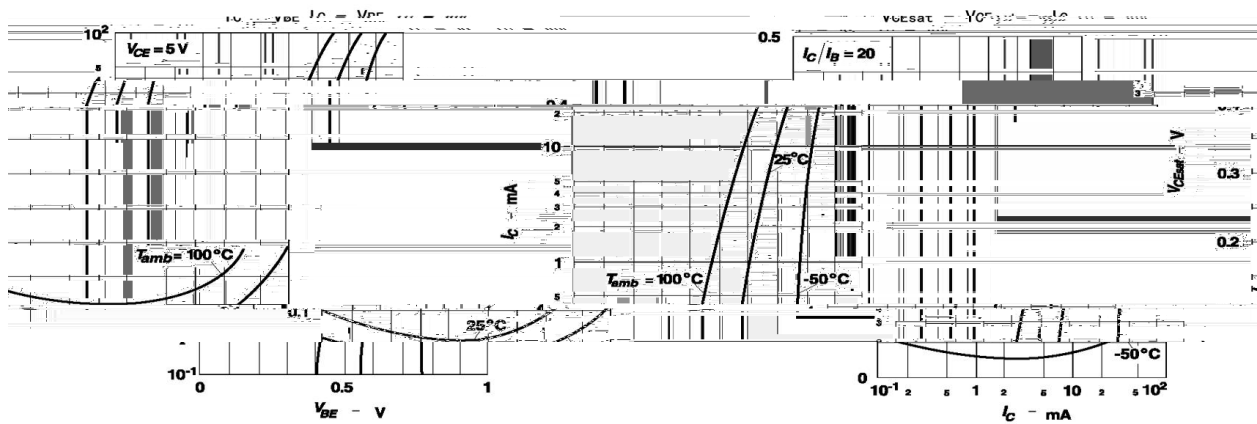


/ Package Dimensions

Symbol


単位

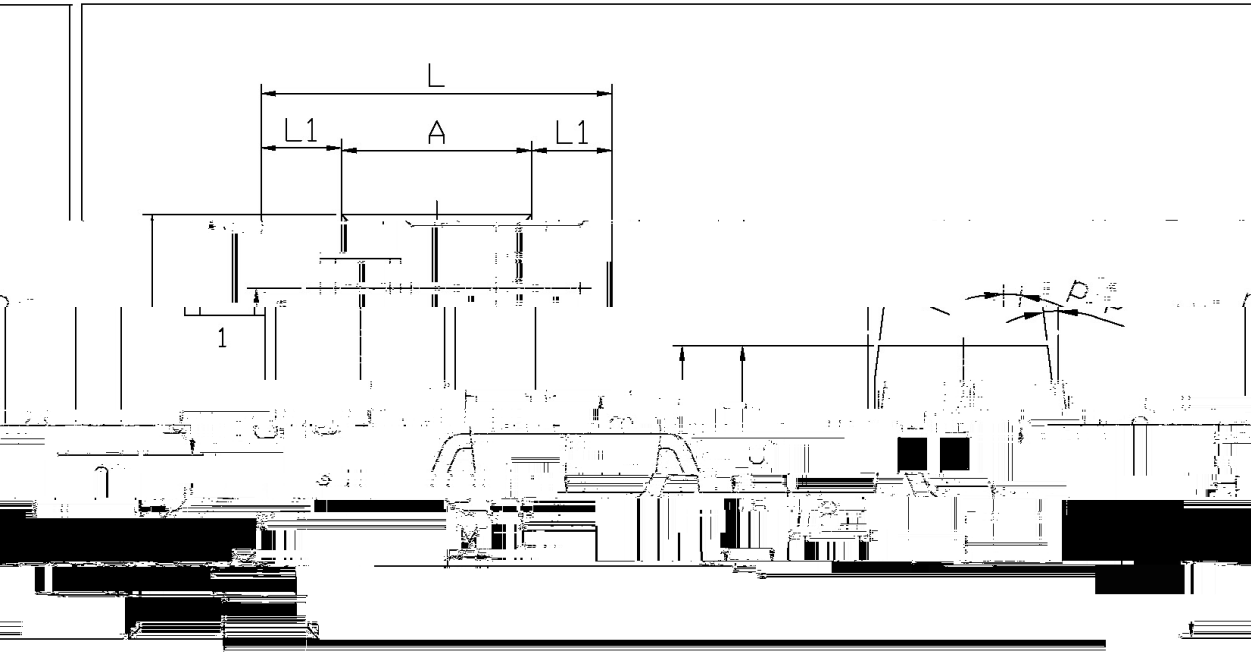

Dimensions in millimeters			Dimensions in millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	0.25	0.5	C	0.25	0.5
B	2.70	3.40	K	0	0.05
E	0.70	2.00	M	0.20	0.20
E1	0.85	1.05	P	0	0.20

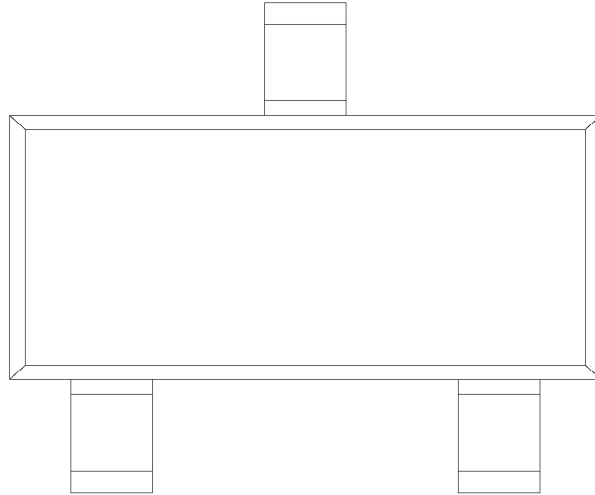/ Marking Instructions

() /

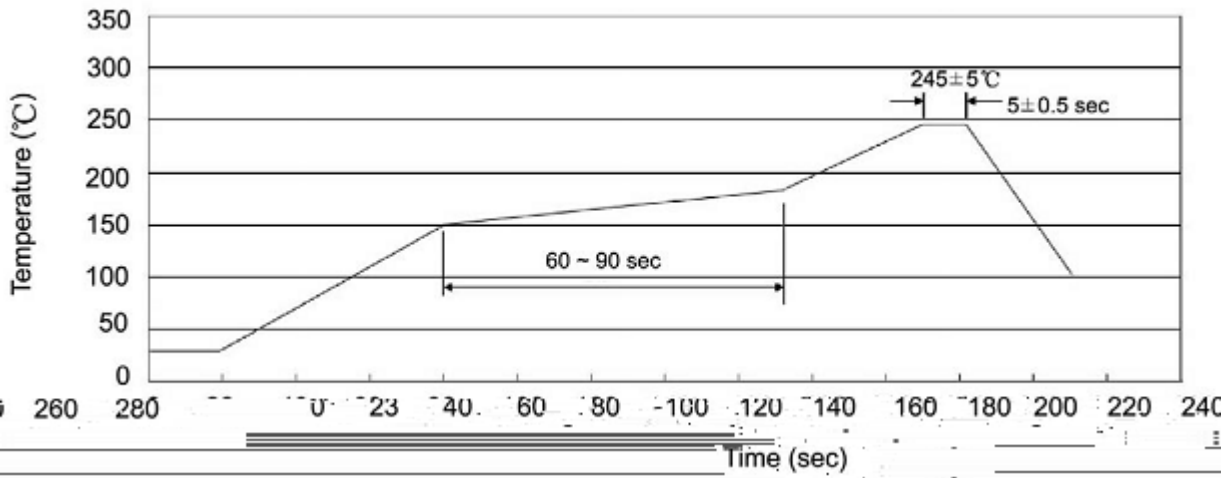

说明：

、预热温度 ~ °C，时间 ~ °C

、峰值温度 ± °C，时间持续为 ±