


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ Marking


/ Absolute Maximum Ratings(Ta=25 –)

/ Electrical Characteristics(Ta=25 –)


/ Electrical Characteristic Curve

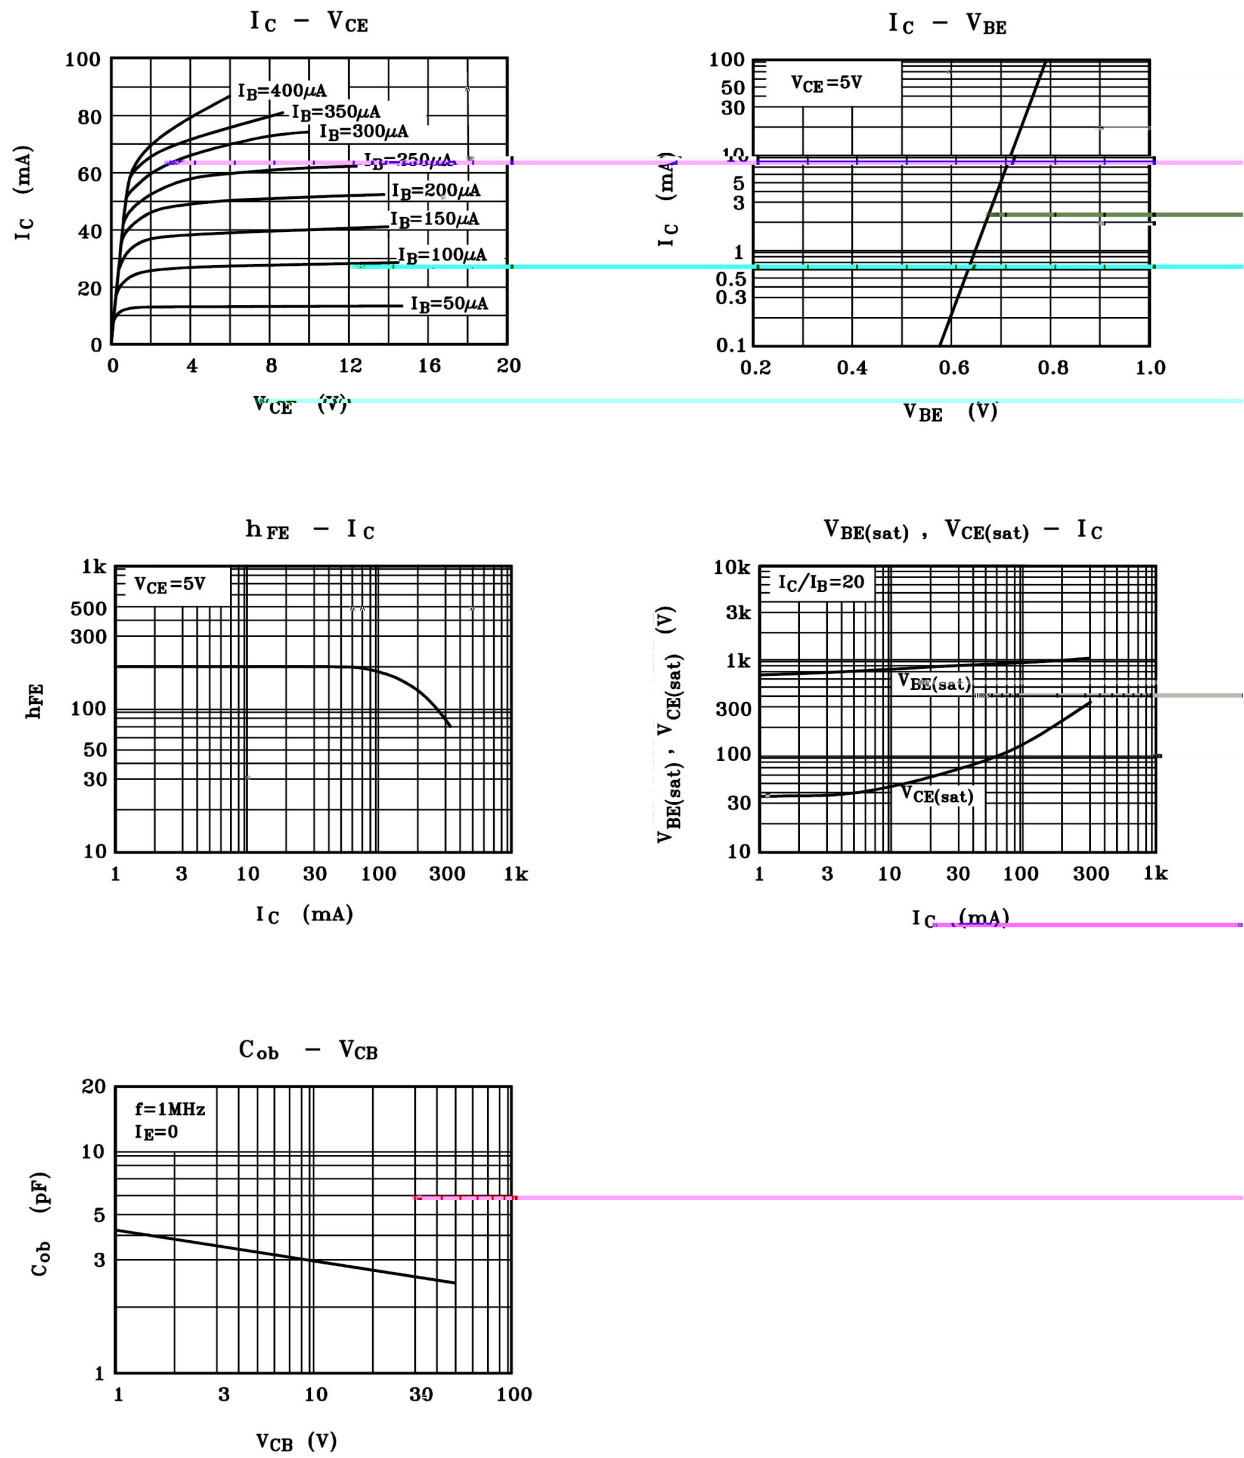


/ Package Dimensions

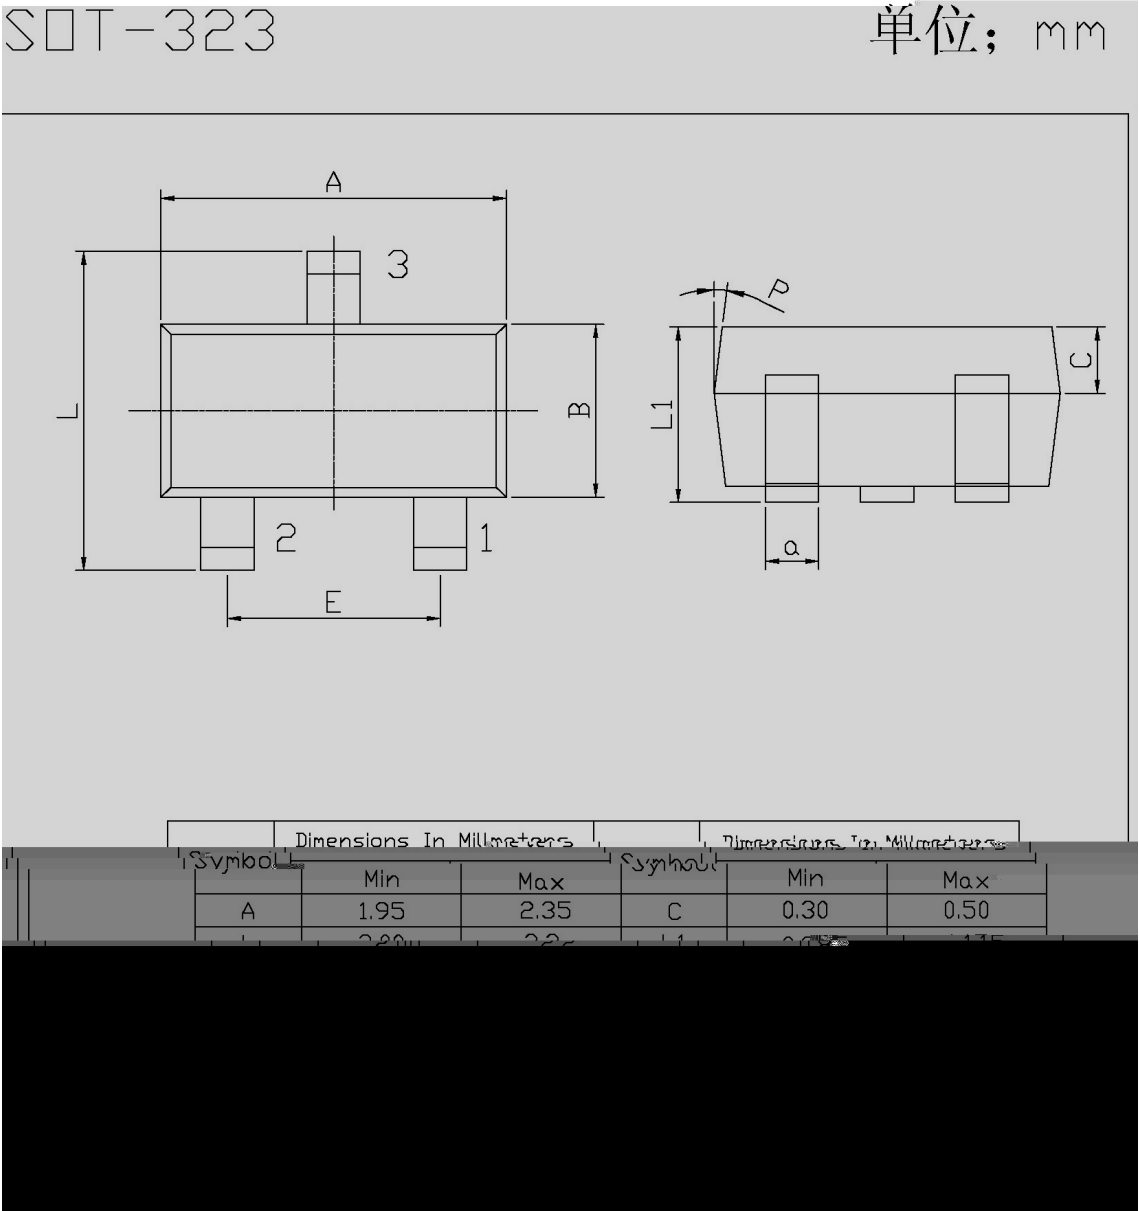

/ Marking Instructions

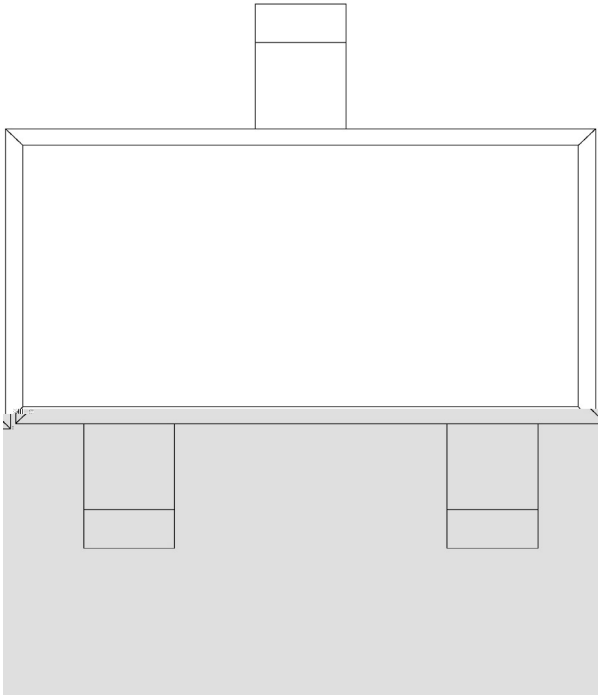

() / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0lueh,

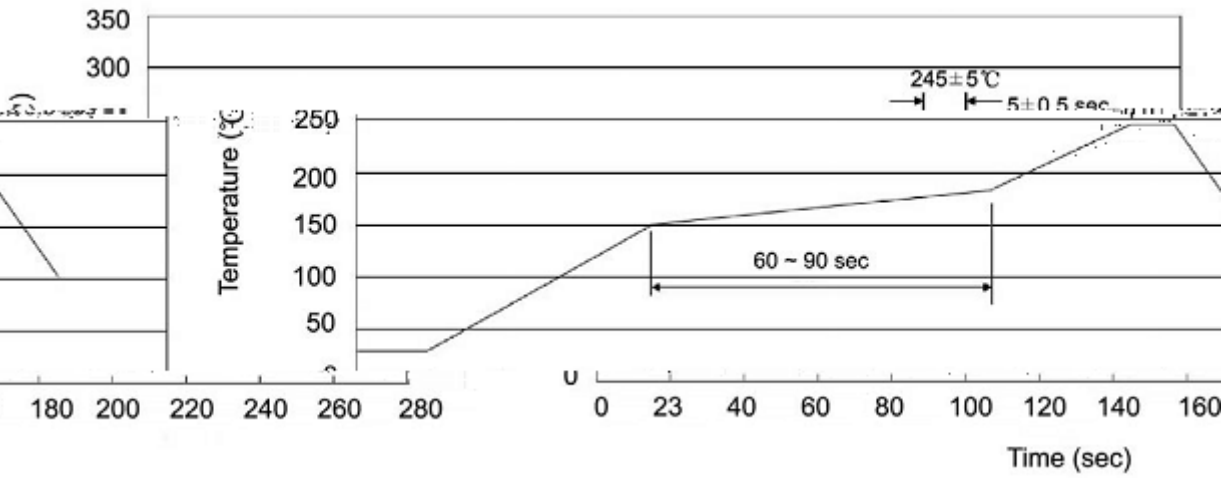

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices