



Rev.F Nov.-2024

SOT-89 PNP Silicon PNP transistor in a SOT-89 Plastic Package.


High current, low voltage, HF Product.

Driver stages of audio and video amplifiers.







Parameter	Symbol	Rating
-----------	--------	--------

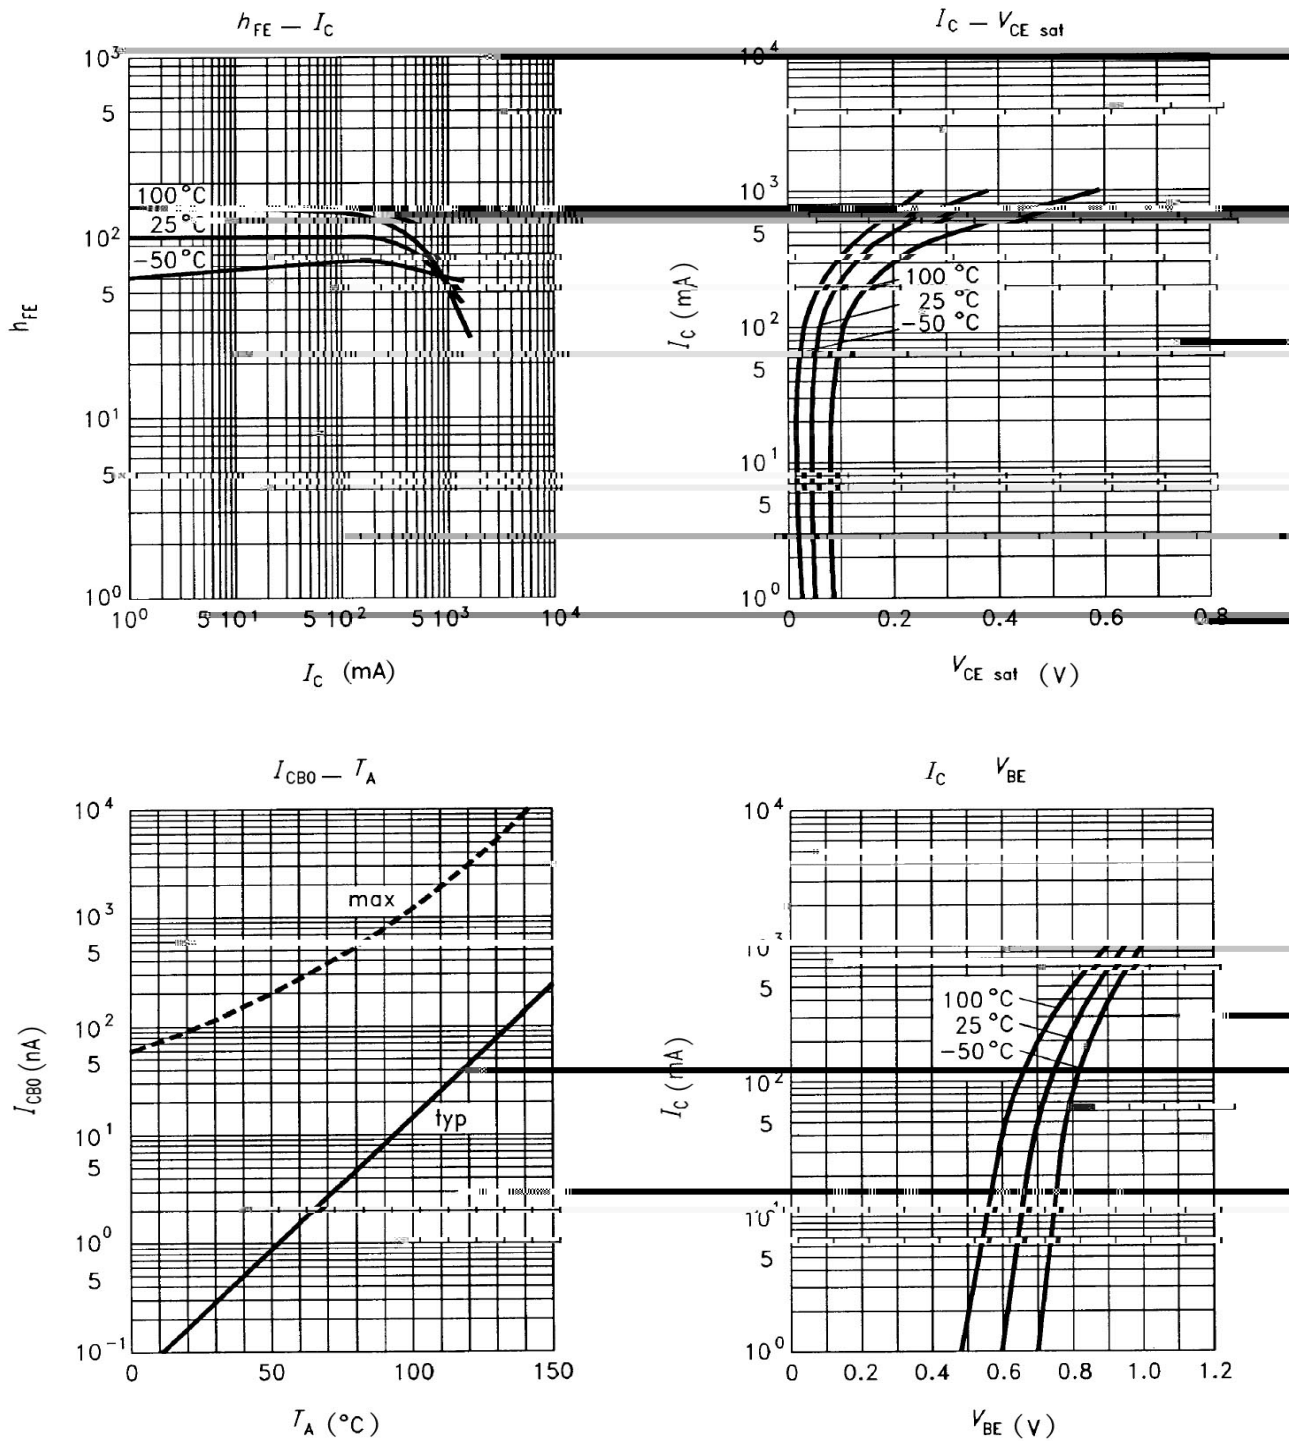

STI-89

单位: mm

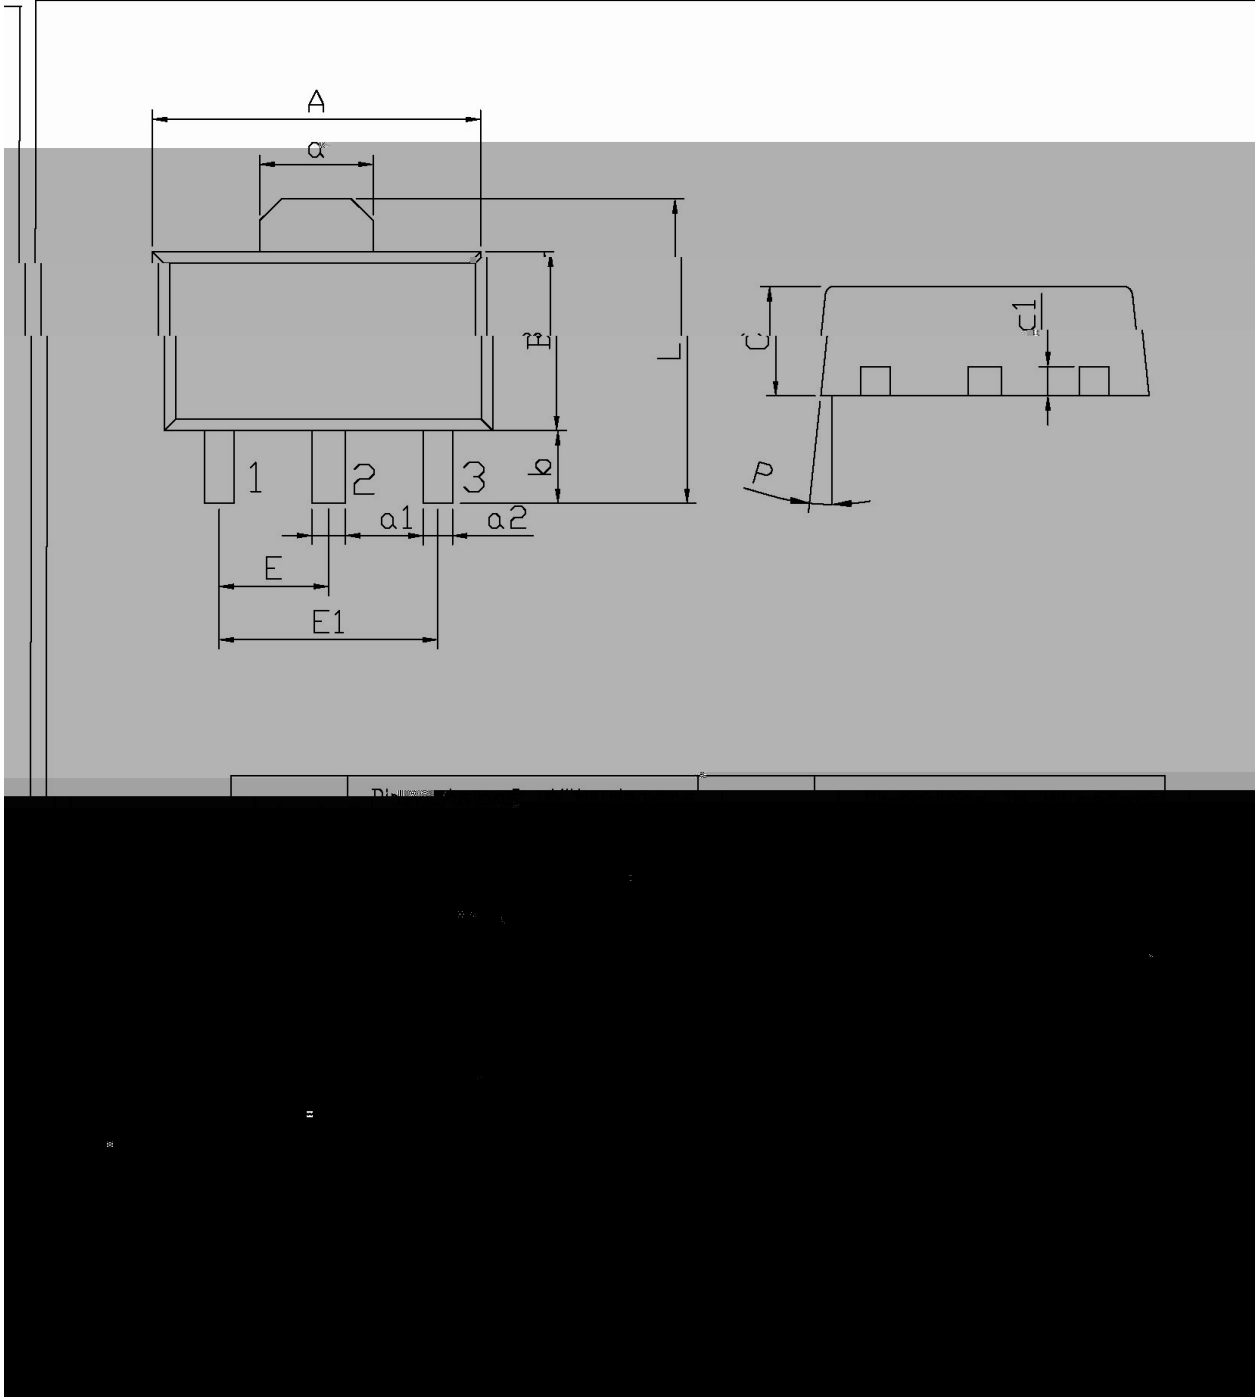

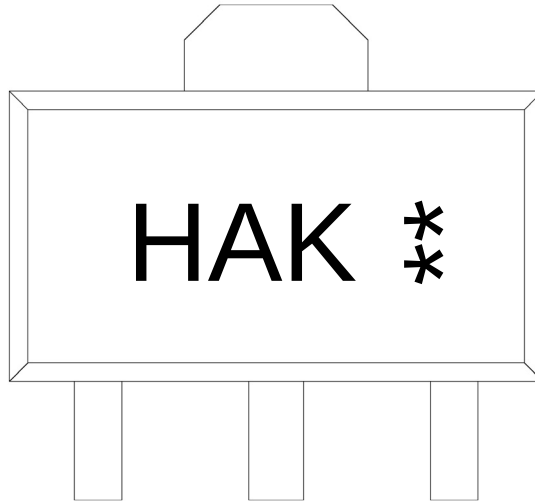

H

AK

**


Note:

H: Company Code

AK: Product Type Code

**: Lot No. Code, code change with Lot No

Temperature Profile for IR Reflow Soldering(Pb-Free)

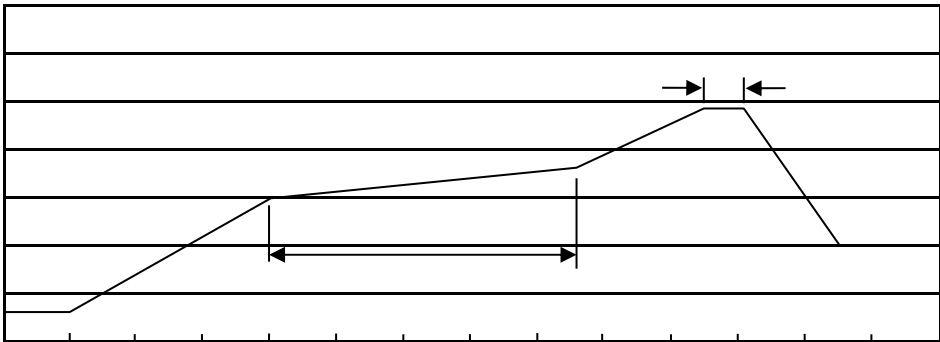

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-89	1,000	7	7,000	6	42,000	7 ×12	180×120×180	390×385×205