
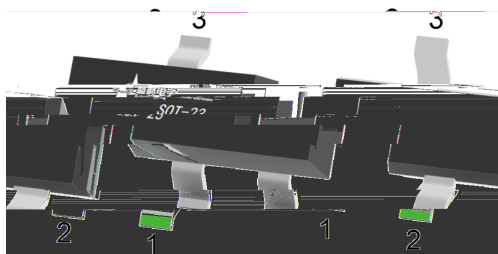


SOT-23 N MOS
N-CHANNEL MOSFET in a SOT-23 Plastic Package.

Sensitive gate trigger current and Low Holding current.ESD protected up to 2KV,HF Product.

Intended for use in general purpose switching and phase control applications.



PIN1 G PIN 2 S PIN 3 D

Marking	702K2
---------	-------

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	60	V
Drain-Gate Voltage	V_{DGR}	60	V
Drain Current - Continuous	I_D $T_a=25$	300	mA
	I_D $T_a=85$	210	
Drain Current - Pulsed(Note 1)	I_{DM}	1200	mA
Gate-Source Voltage - Continuous	V_{GS}	± 20	V
Power Dissipation	P		



Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Turn On Delay Time	$t_{d(ON)}$	VGS =10V, VDD=25V, ID=500mA, RG=25 Ω		6.0		ns
Rise Time	t_r			5.8		
Turn Off Delay Time	$t_{d(OFF)}$			13.2		
Fall Time	t_f			8.9		

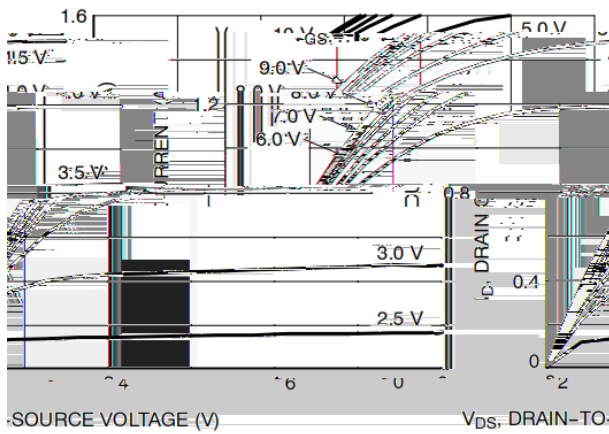


Figure 1. On-Resistance Characteristics

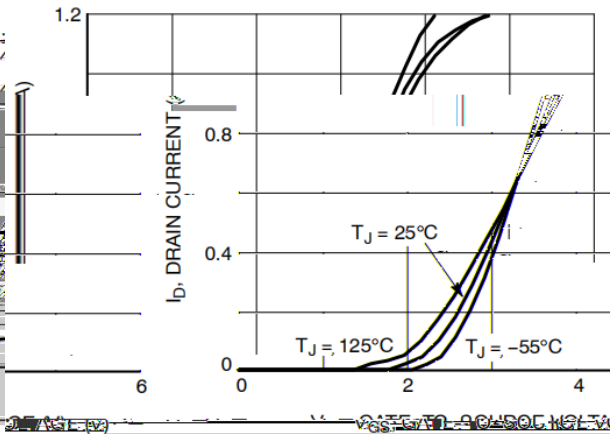


Figure 2. Transfer Characteristics

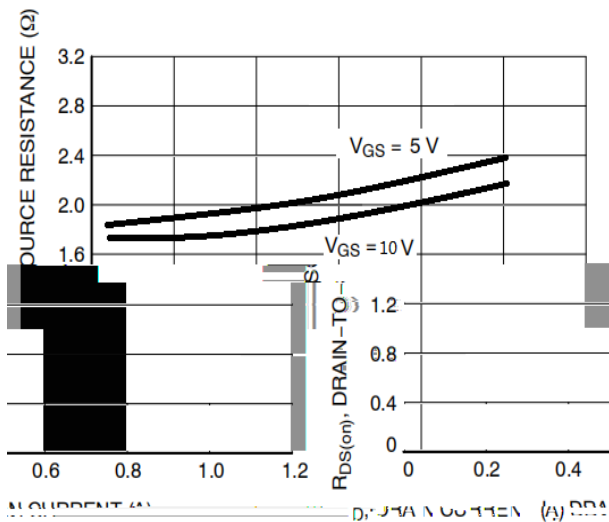


Figure 3. On-Resistance vs. Drain Current and Temperature

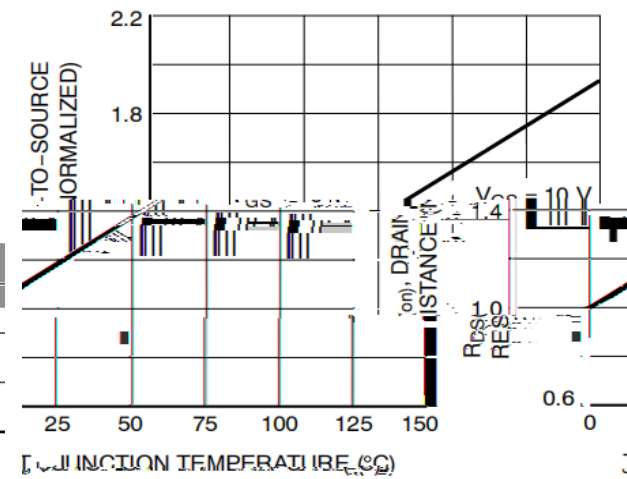


Figure 4. On-Resistance Variation with Temperature

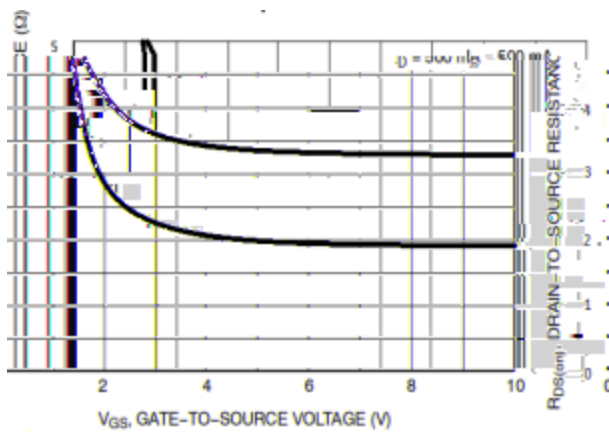


Figure 5. On-Resistance vs. Gate-to-Source Voltage


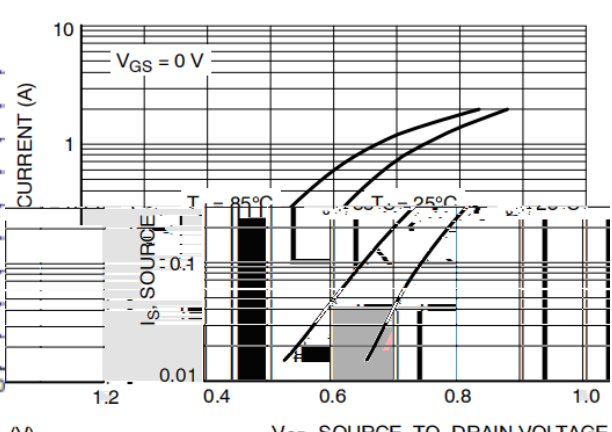



Figure 6. Diode Forward Voltage vs. Current



SOT-23

单位: mm

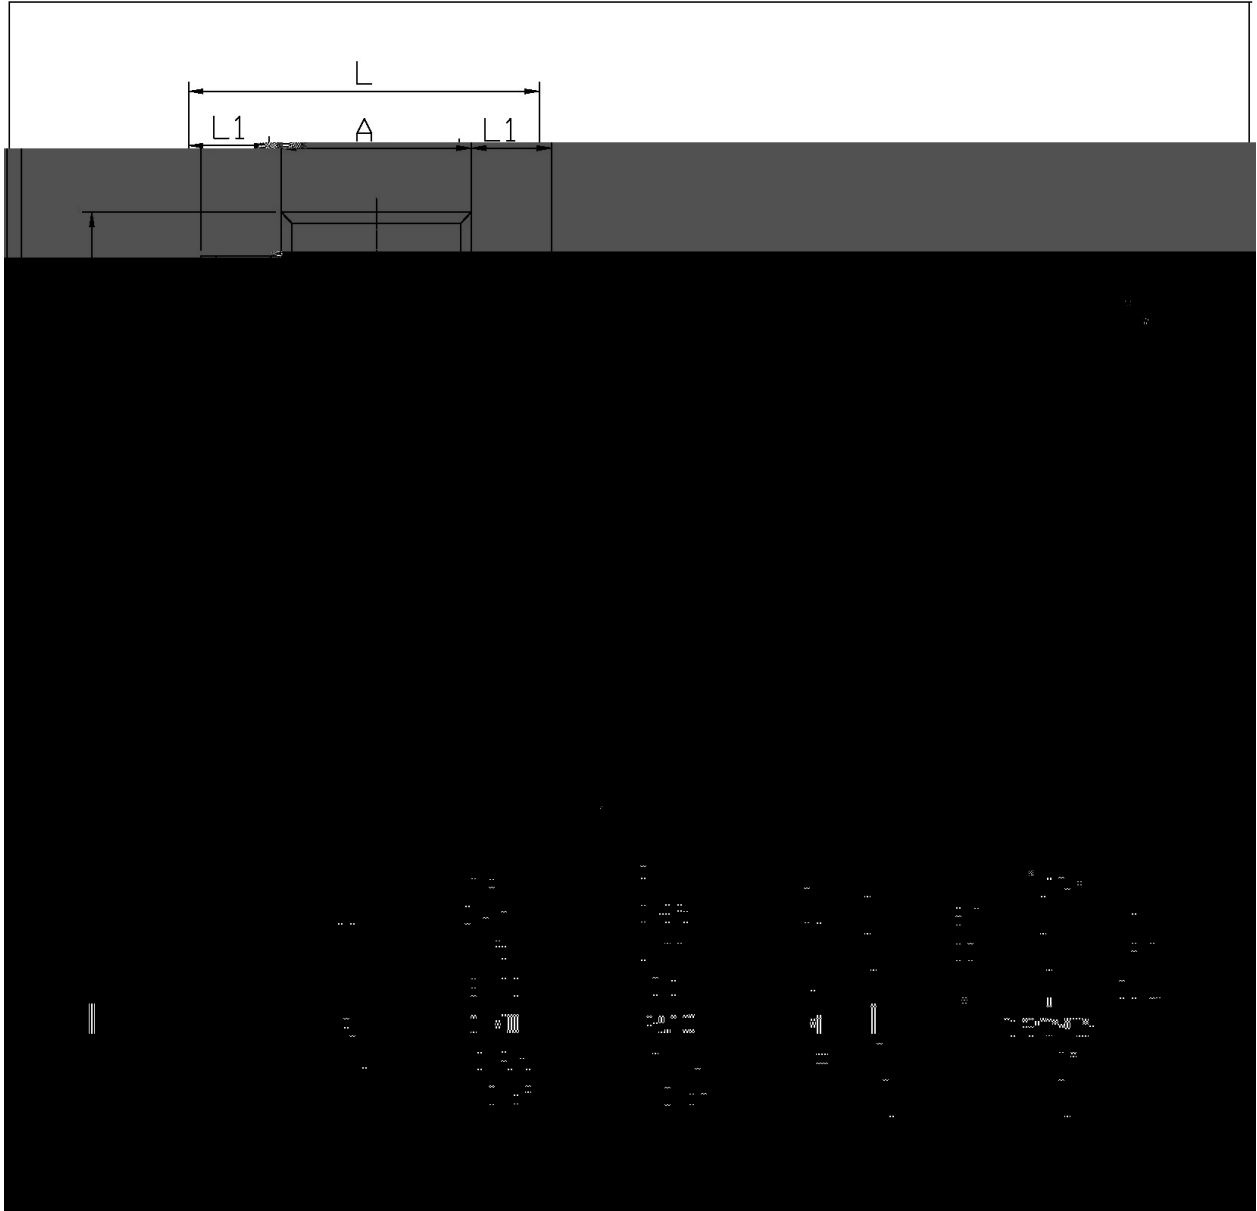

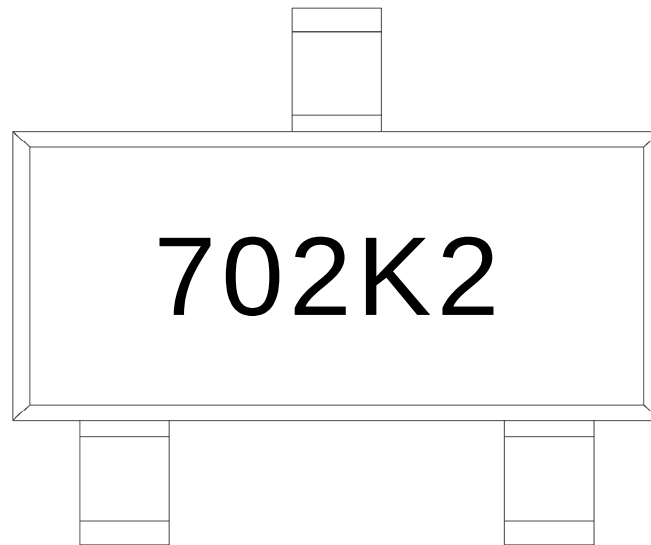


702K2

Note:

702K2: Product Type Code

Temperature Profile for IR Reflow Soldering(Pb-Free)

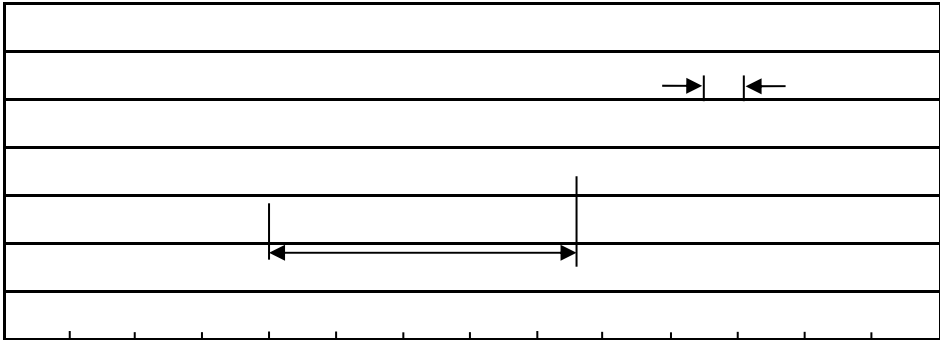

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245 5

5 0.5sec;

2.Peak Temp.:245 5 , Duration:5 0.5sec.
- 3

2 10

/sec.

3. Cooling Speed: 2~10 /sec.

260 5

10 1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205