
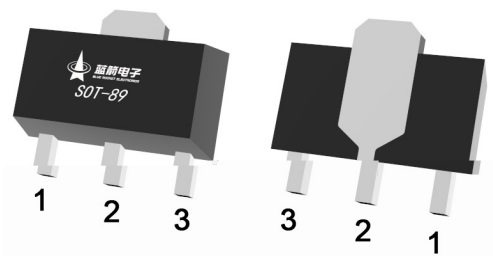


Silicon PNP transistor in a SOT-89 Plastic Package.

High breakdown voltage, good  $h_{FE}$  linearity, low  $V_{CE(sat)}$ , complements the BR2SD1898Q, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

General power amplifier applications, Meet the stringent requirements of automotive applications.

#### / Equivalent Circuit



PIN1 Base      PIN 2 Collector      PIN 3 Emitter

## / Absolute Maximum Ratings(Ta=25 )

| Parameter                           | Symbol    | Rating  | Unit |
|-------------------------------------|-----------|---------|------|
| Collector to Base Voltage           | $V_{CBO}$ | -80     | V    |
| Collector to Emitter Voltage        | $V_{CEO}$ | -80     | V    |
| Emitter to Base Voltage             | $V_{EBO}$ | -5.0    | V    |
| Collector Current-Continuous        | $I_C$     | -1.0    | A    |
| Collector Current-Continuous(Pulse) | $*I_{CP}$ | -2.0    | A    |
| Collector Power Dissipation         | $**P_C$   | 0.5     | W    |
|                                     | $*P_C$    | 2.0     | W    |
| Junction Temperature                | $T_j$     | 150     |      |
| Storage Temperature Range           | $T_{stg}$ | -55 150 |      |


\*Single pulse  $P_w=100ms$  100ms

\*\*mounted on 40×40×0.7mm ceramic board 40×40×0.7m

## / Electrical Characteristics(Ta=25 )

| Parameter                               | Symbol        | Test Conditions                         | Min  | Typ | Max  | Unit    |
|-----------------------------------------|---------------|-----------------------------------------|------|-----|------|---------|
| Collector to Base Breakdown Voltage     | $V_{CBO}$     | $I_C=-50\mu A$ $I_E=0$                  | -80  |     |      | V       |
| Collector to Emitter Breakdown Voltage  | $V_{CEO}$     | $I_C=-1.0mA$ $I_B=0$                    | -80  |     |      | V       |
| Emitter to Base Breakdown Voltage       | $V_{EBO}$     | $I_E=-50\mu A$ $I_C=0$                  | -5.0 |     |      | V       |
| Collector Cut-Off Current               | $I_{CBO}$     | $V_{CB}=-60V$ $I_E=0$                   |      |     | -1.0 | $\mu A$ |
| Emitter Base Cut-Off Current            | $I_{EBO}$     | $V_{EB}=-4.0V$ $I_C=0$                  |      |     | -1.0 | $\mu A$ |
| DC Current Gain                         | $h_{FE}$      | $V_{CE}=-3.0V$ $I_C=-0.1A$              | 82   |     | 390  |         |
| Collector to Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C=-500mA$ $I_B=-50mA$                |      |     | -0.4 | V       |
| Transition Frequency                    | $f_T$         | $V_{CE}=-5.0V$ $I_C=-50mA$<br>$f=30MHz$ |      | 100 |      | MHz     |
| Collector Output Capacitance            | $C_{ob}$      | $V_{CE}=-10V$ $I_E=0$<br>$f=1.0MHz$     |      | 25  |      | pF      |


## / Electrical Characteristic Curve

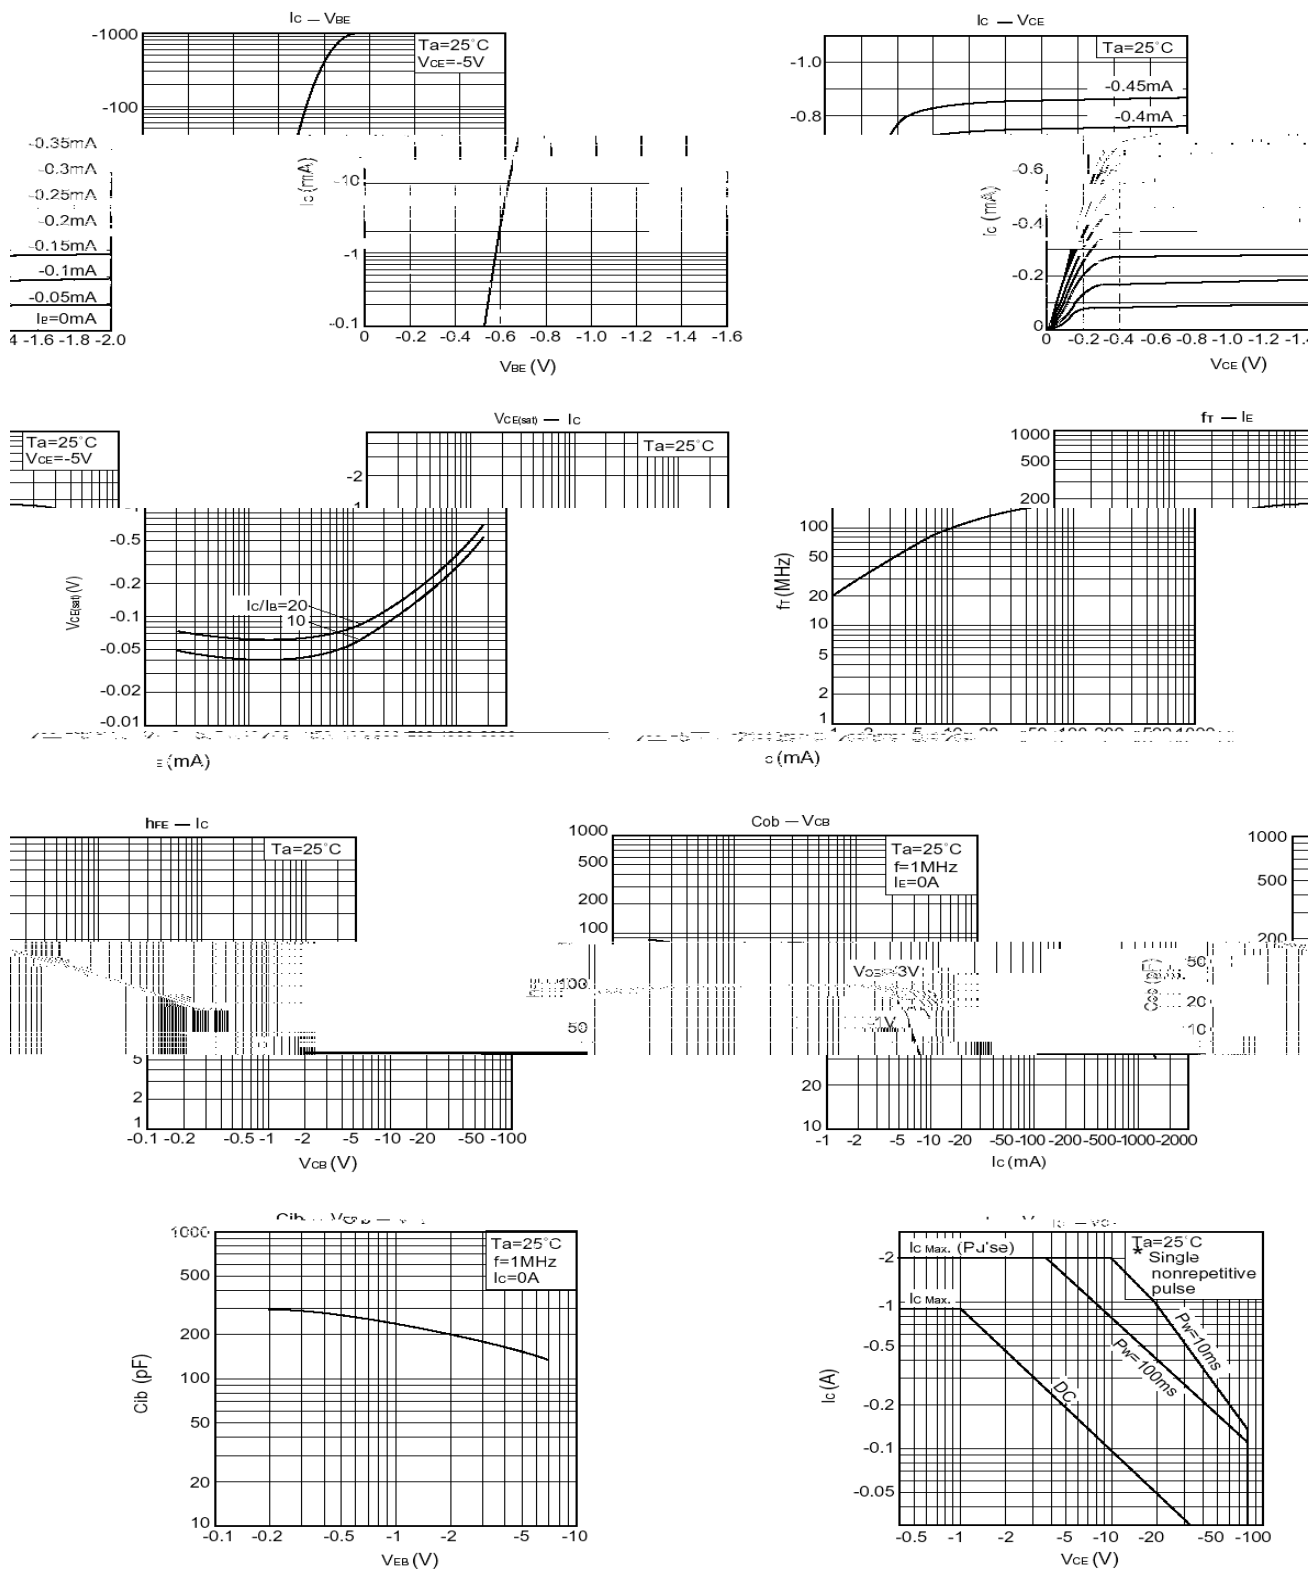


/ Package Dimensions

SOT-89

单位：mm

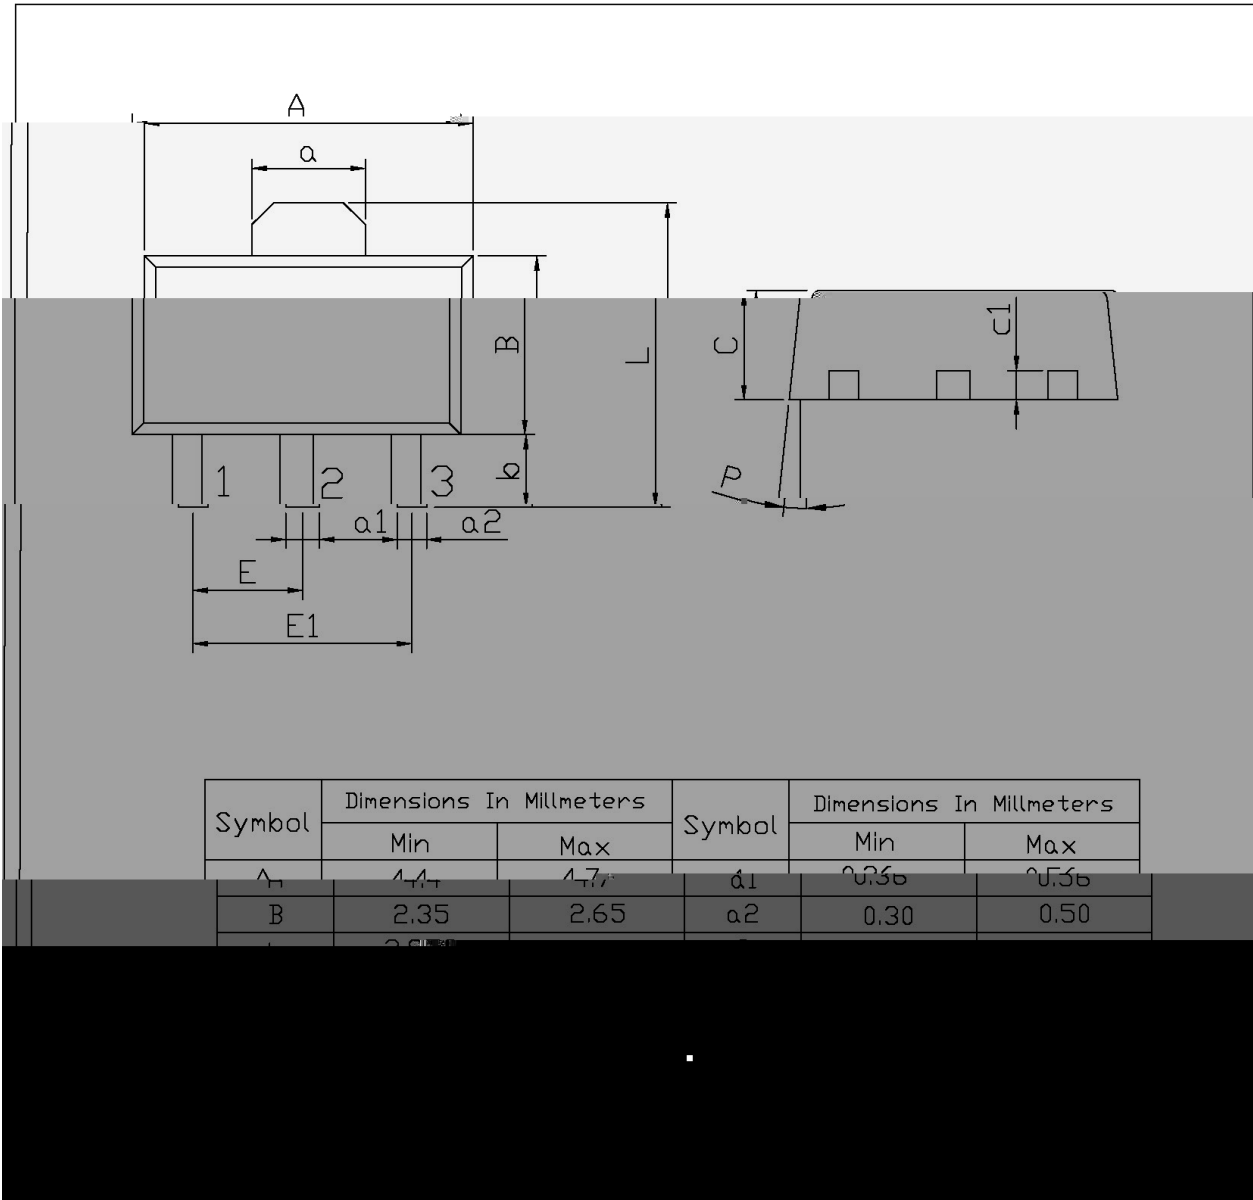

**/ Marking Instructions**

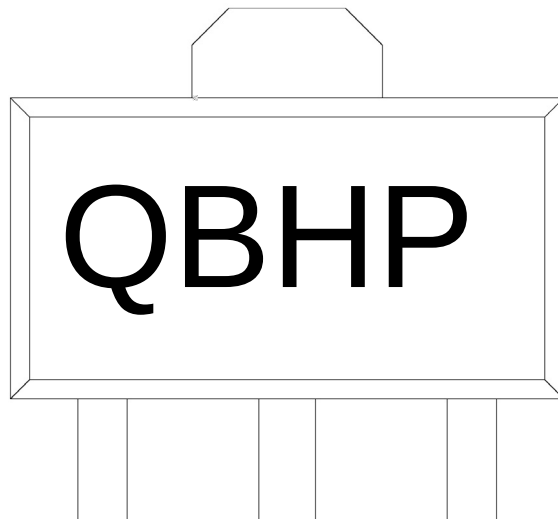

BH

P             $h_{FE}$

Note:

Q:            Automobile halogen-free product Code


BH:          Product Type

P             $h_{FE}$  Classifications Symbol

\*\*:

Lot No. Code, code change with Lot No

(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

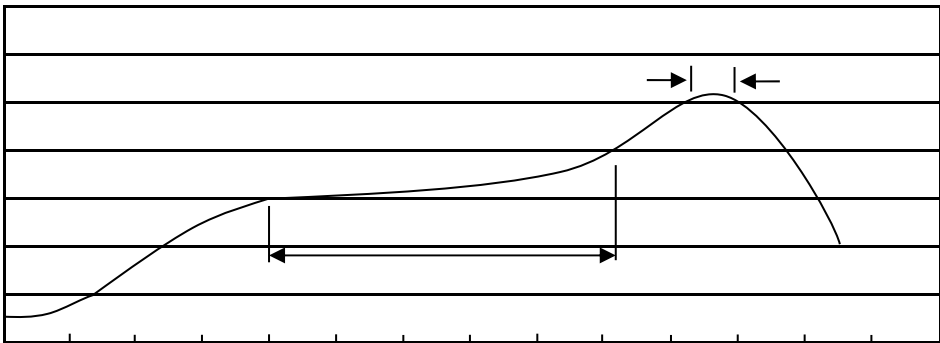

Note:

- 1

150 200

60 120sec;

1.Preheating:150~200 , Time:60~120sec.
- 2

255 5

5 0.5sec;

2.Peak Temp.:255 5 , Duration:5 0.5sec.
- 3

2 10

/sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260 5                      10 1 sec.                      Temp.:260±5                      Time:10±1 sec

/ Packaging SPEC.

/ REEL

| Package Type | Units      |                 |                 |                       |                 | Dimension (unit mm <sup>3</sup> ) |             |             |
|--------------|------------|-----------------|-----------------|-----------------------|-----------------|-----------------------------------|-------------|-------------|
|              | Units/Reel | Reels/Inner Box | Units/Inner Box | Inner Boxes/Outer Box | Units/Outer Box | Reel                              | Inner Box   | Outer Box   |
| SOT-89       | 1,000      | 7               | 7,000           | 6                     | 42,000          | 7 ×12                             | 180×120×180 | 390×385×205 |

/ Notices