


BR2SB649TAQ



DATA SHEET

/ Descriptions


SOT-89                  PNP

/ Features


BR2SD669TAQ                  AEC-Q101

/ Applications

/ Equivalent Circuit




/ Pinning

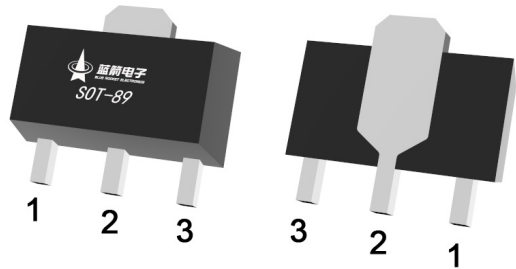

/ hFE Classifications & Marking

|  |   |   |   |
|--|---|---|---|
|  |   |   |   |
|  |   |   |   |
|  | * | * | * |







BR2SB649TAQ

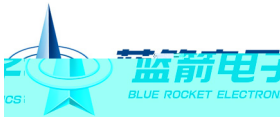

DATA SHEET

|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|--|--|--|--|

## / Electrical Characteristic Curve

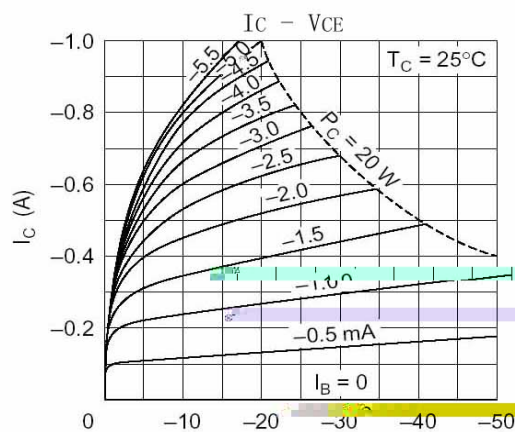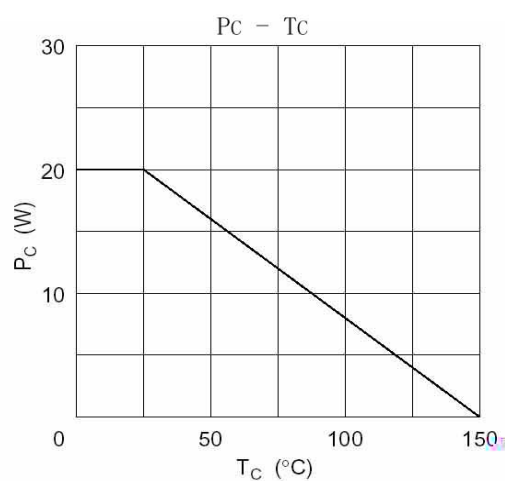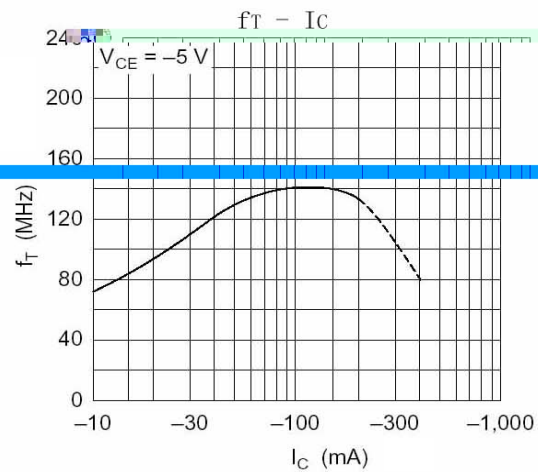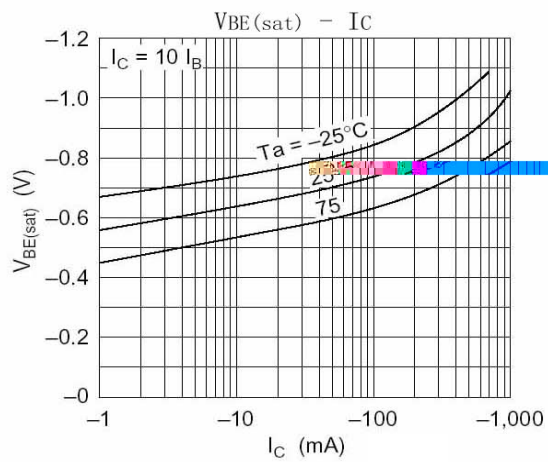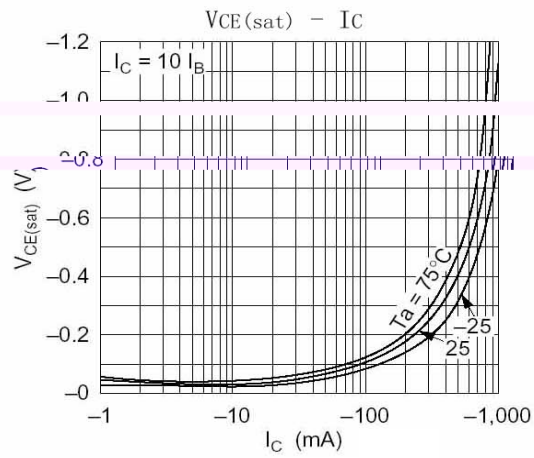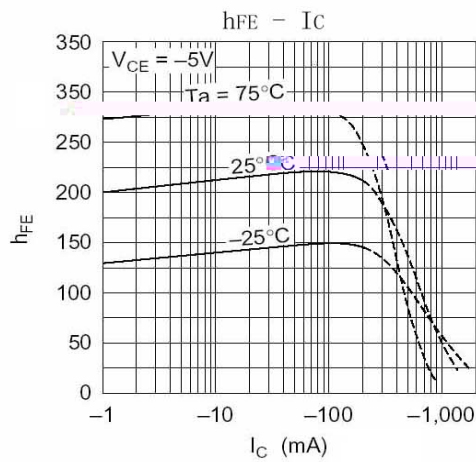


**BR2SB649TAQ**

**BR2SB649TAQ**




**DATA SHEET**

**/ Marking Instructions**

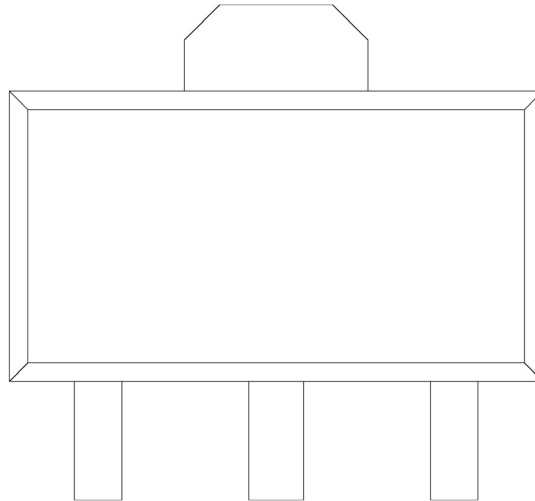

\*\*

(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

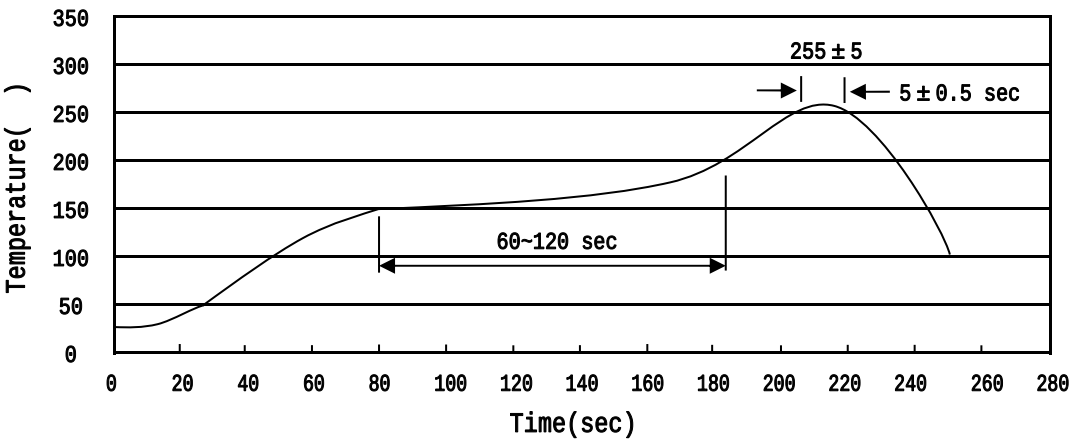

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

|  |  |  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |  |  |

/ Notices