







		~	
		~	
		~	℃
			℃
		~	℃

	△	~ ℃				
	△ △	△				
		△				
		Ω				μ
	△	Ω ~ ℃				μ

/ Electrical Characteristic Curve

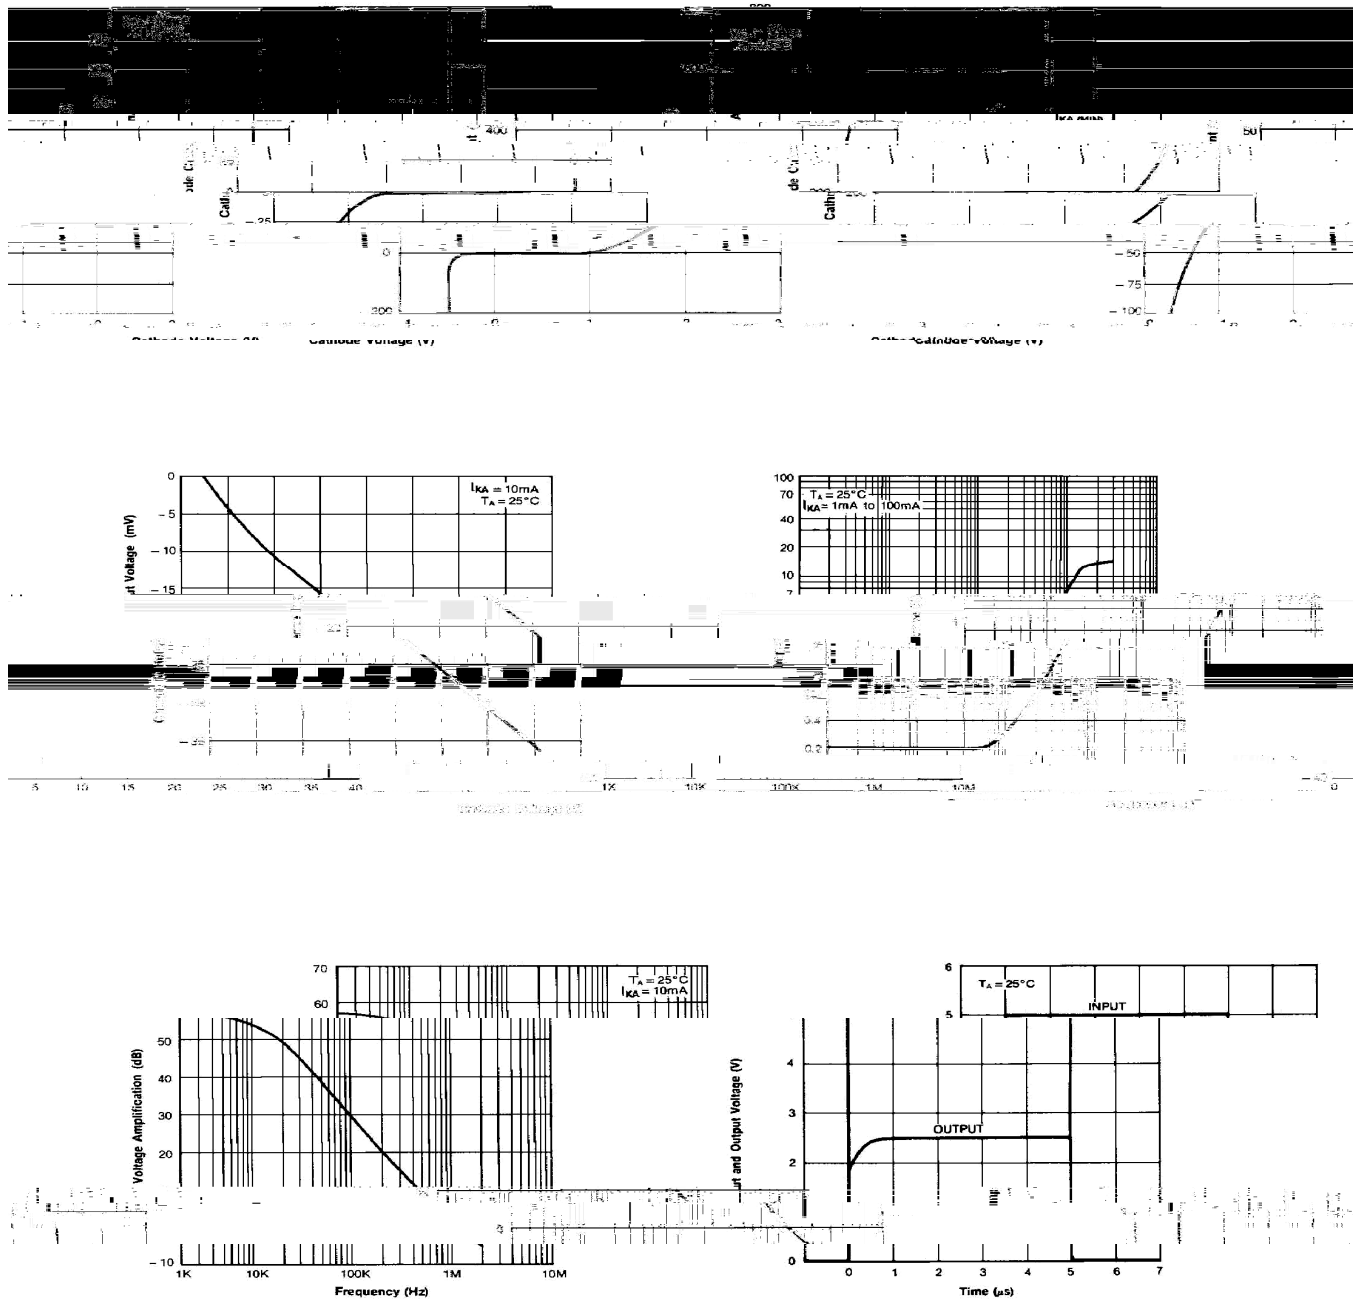


& Test circuits&Typical Application

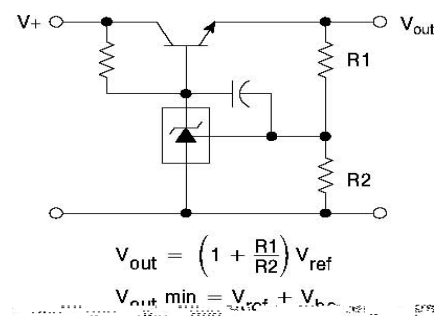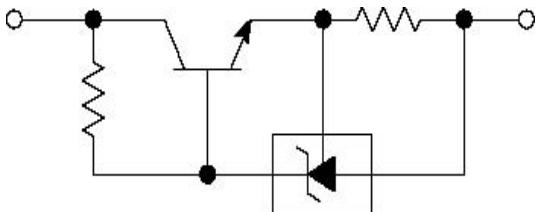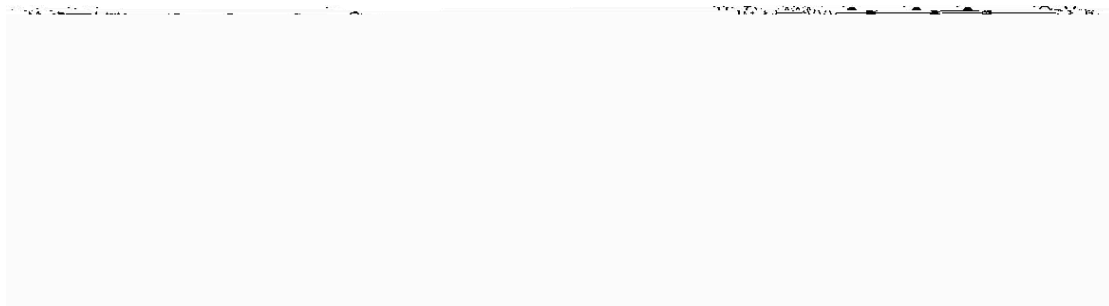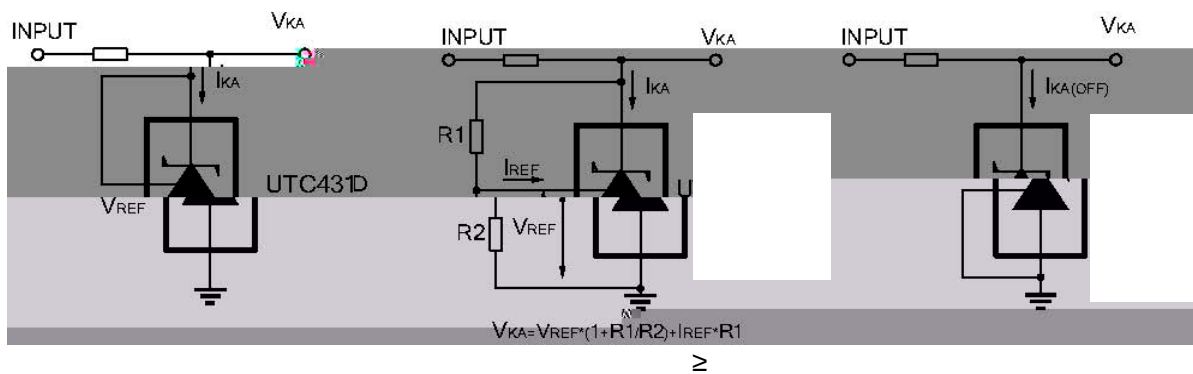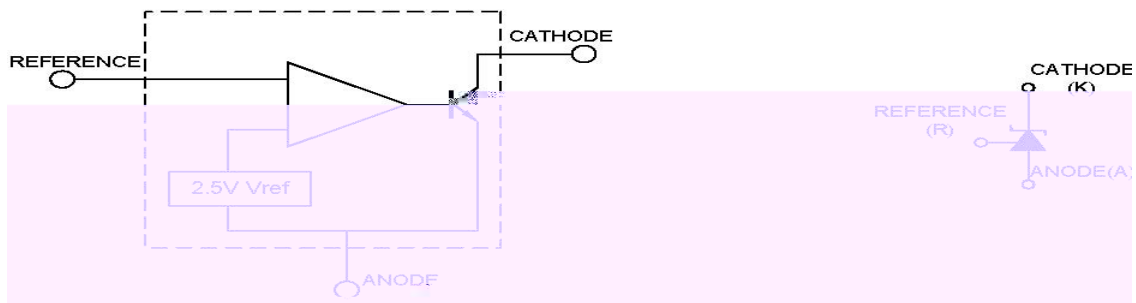


/ Package Dimensions

SOT-23

单位：mm

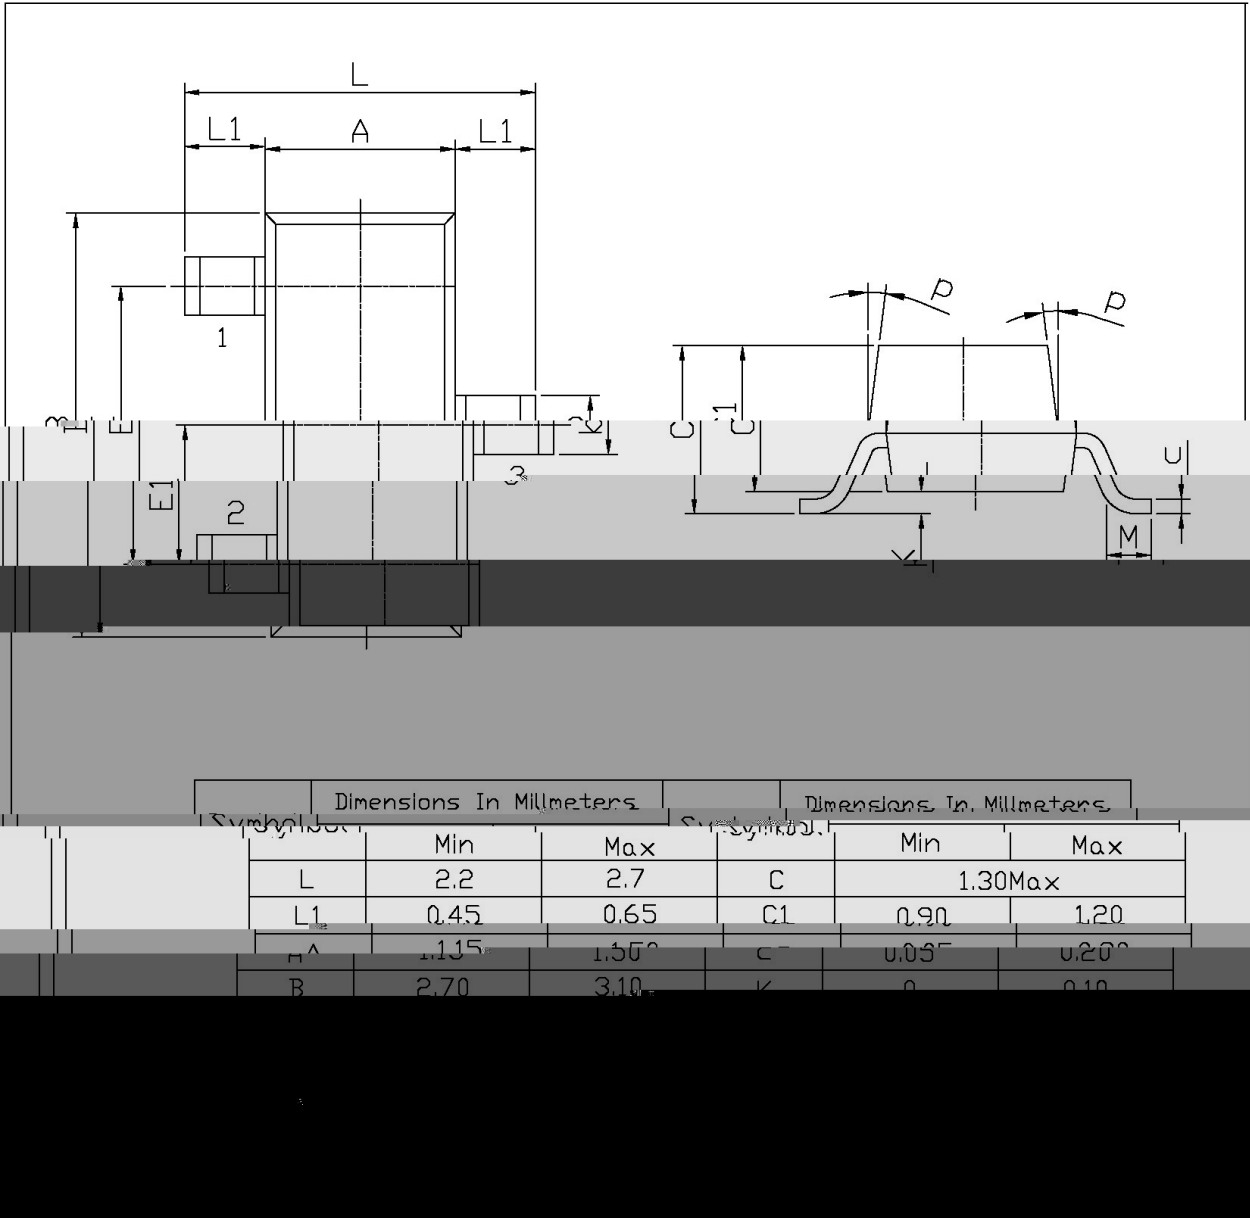

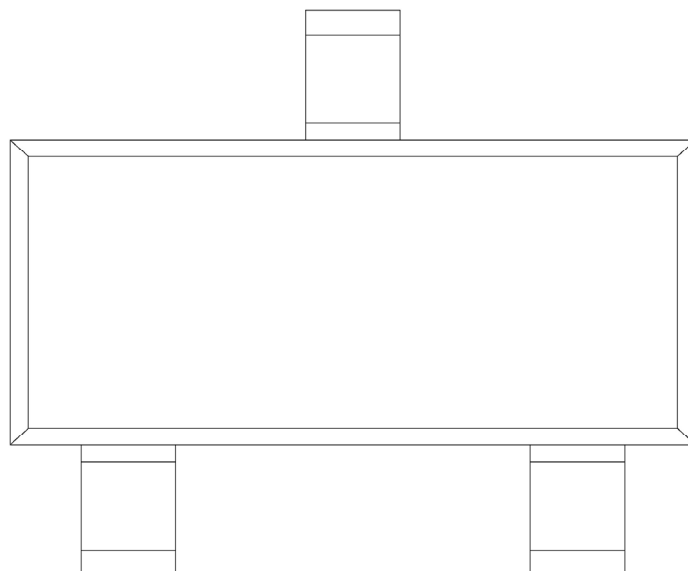
/ Marking Instructions

EU

764

U- EU764 P U N

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

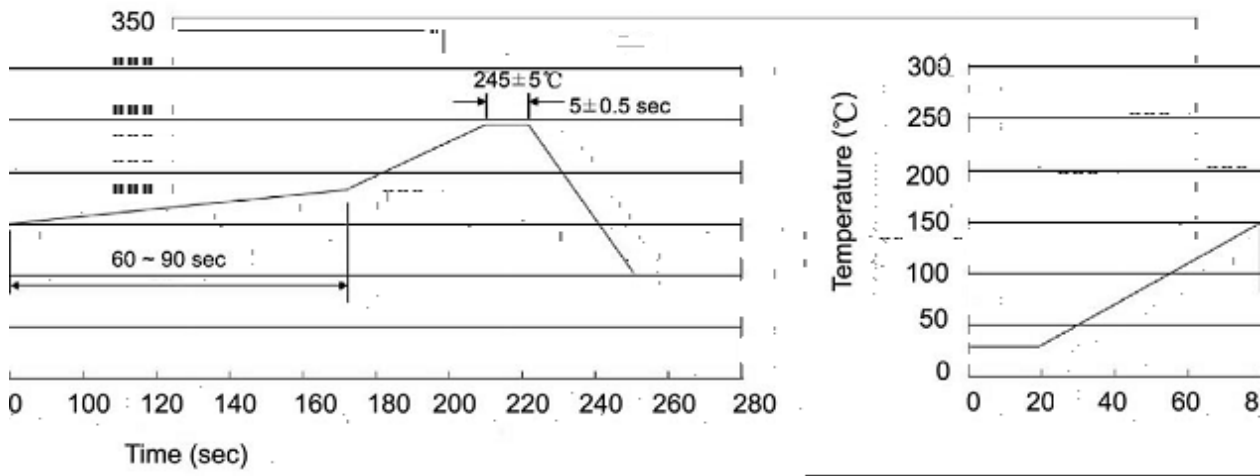

/ Resistance to Soldering Heat Test Conditions

2 3/8 2 °C

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

/ Notices