



BRCL3550MF

/


BRCL3550MF

4.20V±1%
/ /
7V
0V
C/10
1uA
BAT-VDD

SP

BRCL3550MF


SP

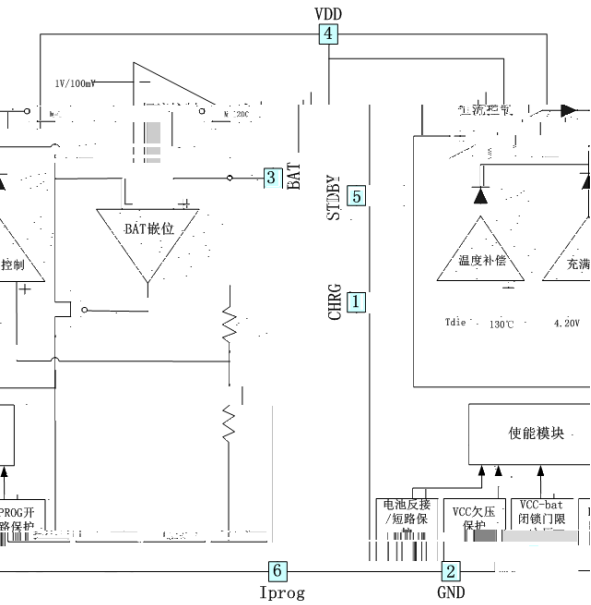





CHRG	1	


<http://www.fsbrec.com>

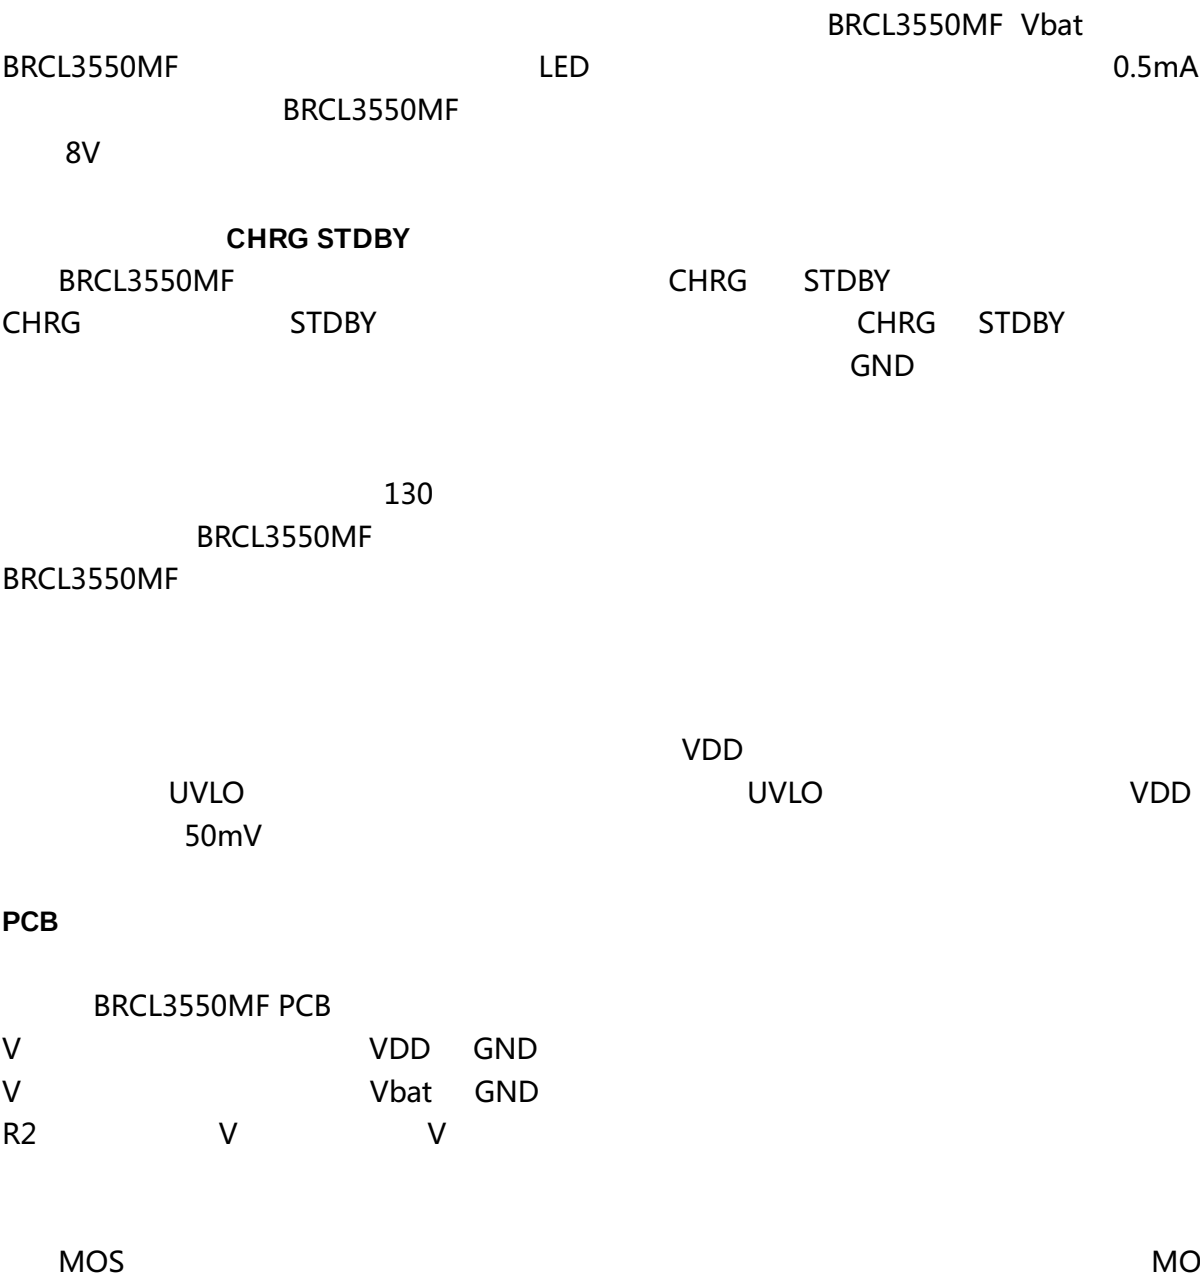



Rev.D Nov.-2020

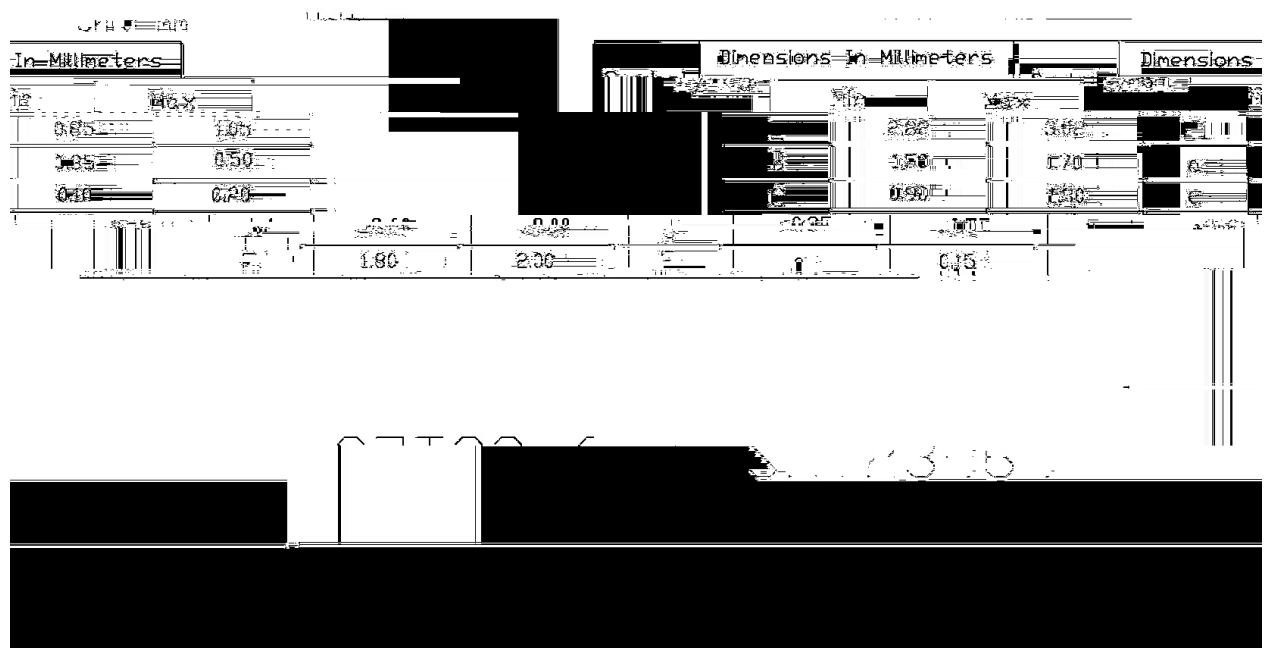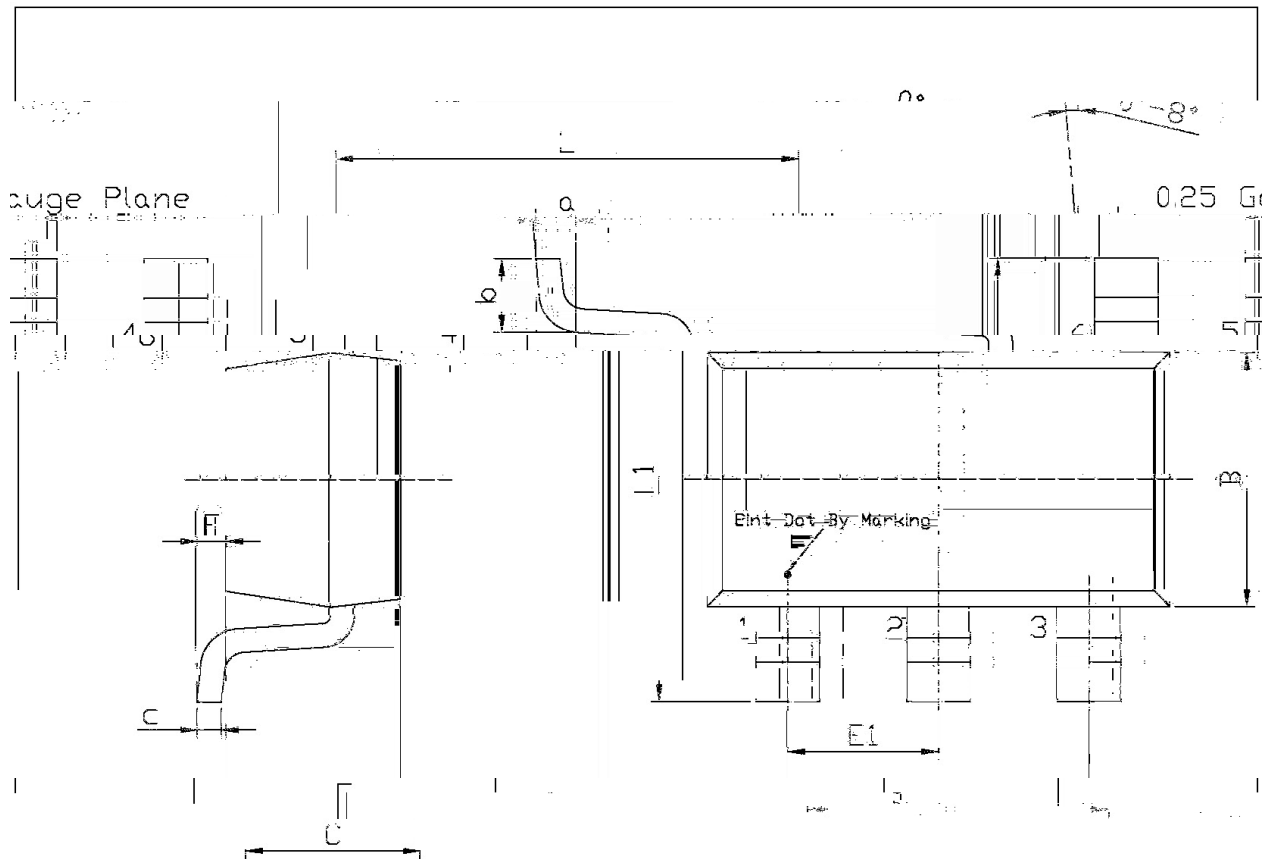

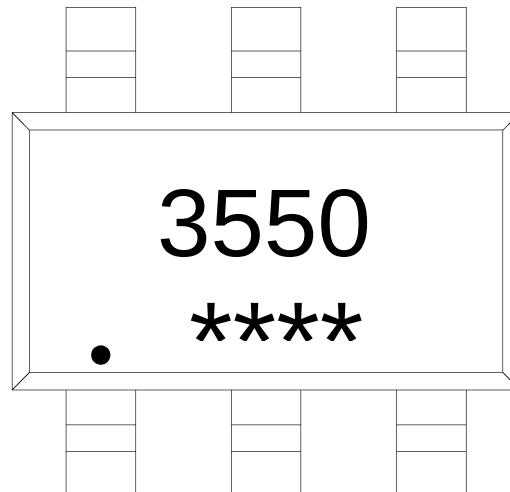


•	PIN1
3550	

Note:	
•	PIN1 Mark
3550:	Product Type Code.
****:	Lot No. Code, code change with Lot No.



Temperature Profile for IR Reflow Soldering(Pb-Free)

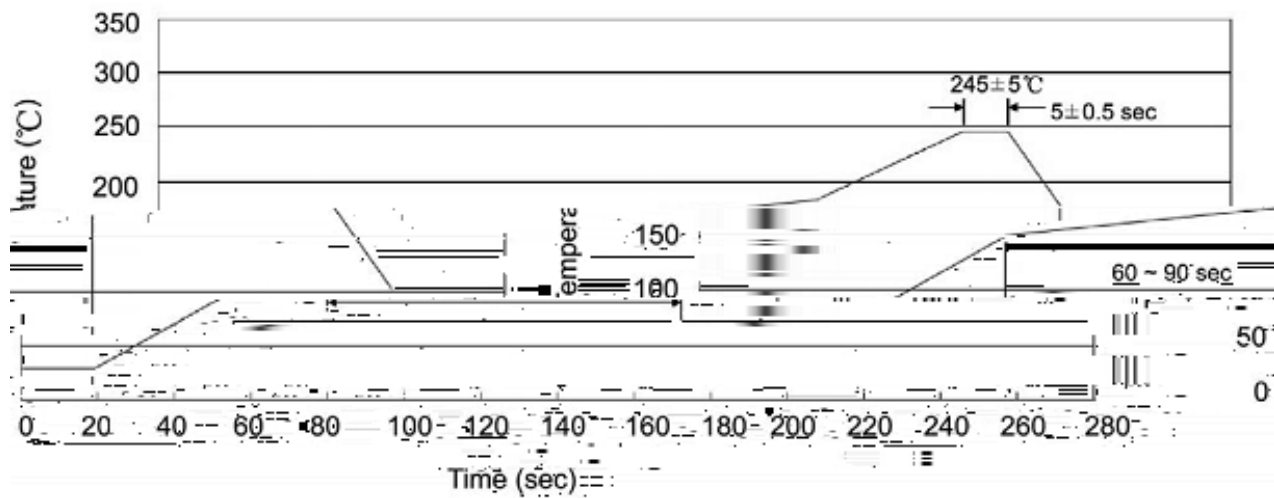

Note:

- 1

150 180

60 90sec;
- 2

245 5

5 0.5sec;
- 3

2 10

/sec.
- 1.Preheating:150~180

, Time:60~90sec.
- 2.Peak Temp.:245 5

, Duration:5 0.5sec.
3. Cooling Speed: 2~10

/sec.

260 5 10 1 sec. Temp.:260 5 Time:10 1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SOT23-5/6	3,000	10	30,000	4	120,000	7" ×8	210×205×205	445×230×435