

BRCM24C32SC SOP-8 32 Kbit I²C

The BRCM24C32SC is 32Kbit I²C-compatible Serial EEPROM (Electrically Erasable Programmable Read-Only Memory) device in a SOP-8 Plastic Package. Halogen-free Product.

	1.7V	2.5~5.5V	1Mhz	1.7~2.5V
	400Khz			
CMOS		400uA	1.6mA	
it		;		β

/ Pinning

Pin	Name	Type	Description
1	E0	Input	
2	E1	Input	
3	E2	Input	
4	GND	Ground	
5	SDA	I/O	/
6	SCL	Input	
7	WCB	Input	
8	VCC	Power	

/ Marking

/ See Marking Instructions

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Storage Temperature	T _{stg}	-65~+150	
Operation Temperature	T _{opr}	-40~+85	
Maximum Operation Voltage	V _{cc}	6.25	V
Voltage on Any Pin with Respect to Ground	V _{pin}	-1.0~ V _{cc} +1.0	V
DC Output Current	I _{out}	5.0	mA
Electro-Static discharge HBM mode	ESD	6000	V

/ Reliability Characteristic

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Endurance	EDR	25 3.3V Page mode	1,000,000			Write cycles
Data retention	DRET		100			Years


/ AC Electrical Characteristics(Unless otherwise specified, Vcc = 1.7V to 5.5V,

T_A = -40°C to 85

Parameter	Symbol	1.7V≤Vcc<2.5V			2.5V≤Vcc≤5.5V			Unit
		Min	Typ	Max	Min	Typ	Max	
Data In Hold Time	t _{HD.DAT}	0	-	-	0	-	-	us
Data In Setup Time	t _{SU.DAT}	0.1	-	-	0.1	-	-	us
Inputs Rise Time[1]	t _R	-	-	0.3	-	-	0.3	us
Inputs Fall Time[1]	t _F	-	-	0.3	-	-	0.1	us
Stop Setup Time	t _{SU.STO}	0.6	-	-	0.25	-	-	us
Data Out Hold Time	t _{DH}	0.05	-	-	0.05	-	-	us
WCB pin Setup Time	t _{SU.WCB}	1.2	-	-	0.6	-	-	us
WCB pin Hold Time	t _{HD.WCB}	1.2	-	-	0.6	-	-	us
Write Cycle Time	t _{WR}	-	-	5	-	-	5	ms

Notes:AC measurement conditions:

1. R_L (connects to Vcc): 1.3k (2.5V, 5.5V), 10k (1.7V)
2. Input pulse voltages: 0.3 Vcc to 0.7 Vcc
3. Input rise and fall times: ≤50ns
4. Input and output timing reference voltages: 0.5Vcc

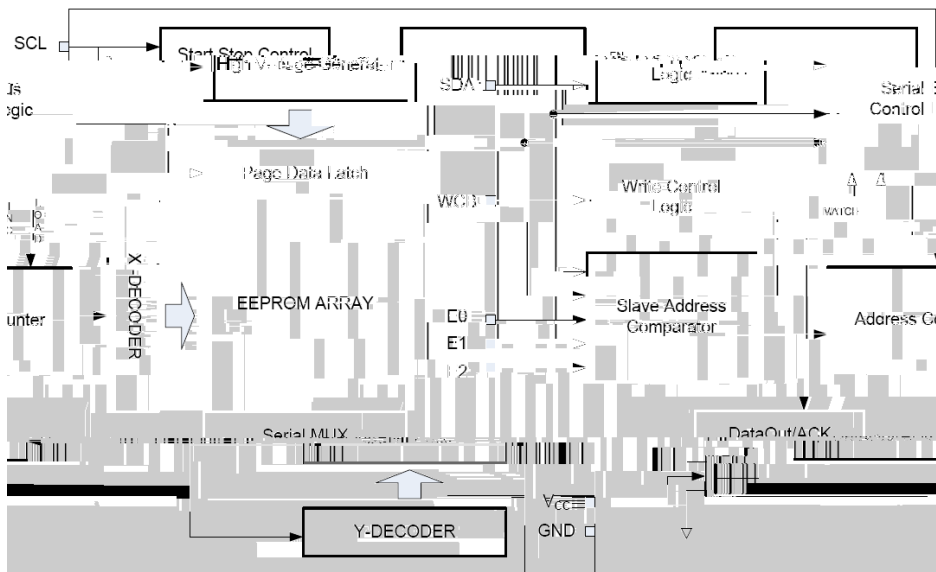

/ Functional Description

/ Data Input

SDA SDA SCL (1) SCL
(1)

The SDA pin is normally pulled high with an external device. Data on the SDA pin may change only during SCL low time periods (see to Figure 1). Data changes during SCL high periods will indicate a start or stop condition as defined below.

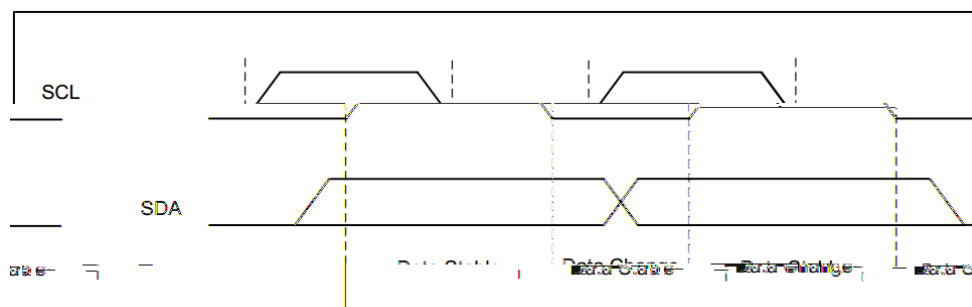


Figure 1 Data Validity

/ Start Condition

SCL SDA
2

A high-to-low transition of SDA with SCL high is a start condition which must precede any other command (see to Figure 2).

/ Stop Condition

SCL SDA

BRCM24C32SC

A low-to-high transition of SDA with SCL high is a stop condition. After a read sequence, the stop command will place the BRCM24C32SC in a standby power mode (see Figure 2).

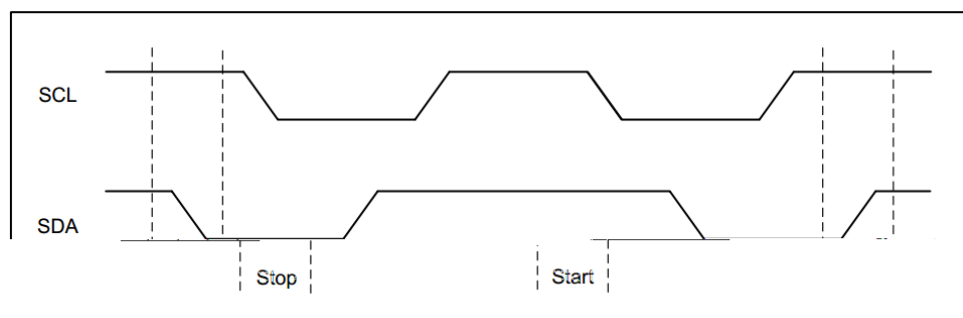



Figure 2 Start and Stop Definition

ACK / Acknowledge

ACK BRCM24C32SC BRCM24C32SC " 0 "
9

/ Functional Description

All addresses and data words are serially transmitted to and from the BRCM24C32SC in 8-bit words. The BRCM24C32SC sends a “0” to acknowledge that it has received each word. This happens during the ninth clock cycle.

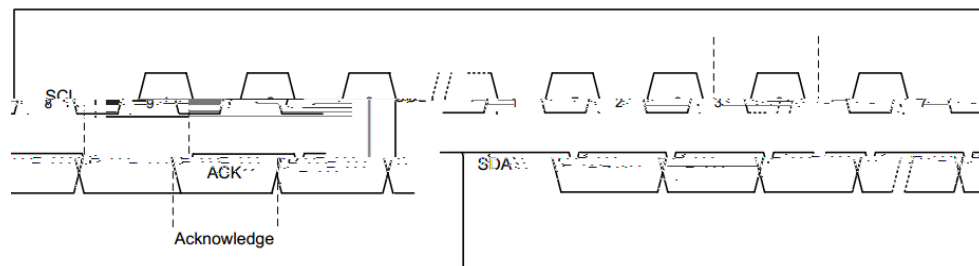

/ Functional Description

Chip	Access area	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
BRCM24C32SC	Normal Area	1	0	1	0	E2	E1	E0	R/W
	ID Page	1	0	1	1	E2	E1	E0	R/W
	Lock Bit	1	0	1	1	E2	E1	E0	R/W
	Serial Number	1	0	1	1	E2	E1	E0	1

Table 1 Device Address

Chip	Access area	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
BRCM24C32SC	Normal Area	X	X	X	X	A11	A10	A9	A8
	ID Page	X	X	X	X	0	0	X	X
	Lock Bit	X	X	X	X	X	1	X	X
	Serial Number	X	X	X	X	1	0	X	X

Table 2 First Word Address

Chip	Access area	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
BRCM24C32SC	Normal Area	A7	A6	A5	A4	A3	A2	A1	A0
	ID Page	X	X	X	A4	A3	A2	A1	A0
	Lock Bit	X	X	X	X	X	X	X	X
	Serial Number	X	X	X	X	A3	A2	A1	A0

Table 3 Second Word Address

E2 E1 E0	8	E2 E1
E0	8	/
0	1	0

The E2, E1 and E0 device address bits to allow as many as 8 devices on the same bus. These bits must compare to their corresponding hardwired input pins. The E2, E1 and E0 pins use an internal proprietary circuit that biases them to a logic low condition if the pins are floating. The eighth bit of the device address is the read/write operation select bit. A read operation is initiated if this bit is high and a write operation is initiated if this bit is low. Upon a compare of the device address, the Chip will output a zero. If a compare is not made, the device will return to a standby state.

/ Data Security

BRCM24C32SC WCB Vcc

BRCM24C32SC has a hardware data protection scheme that allows the user to write protect the whole memory when the WCB pin is at Vcc.

/ Byte Write

8		8		8
BRCM24C32SC	“ 0 ”		8	
BRCM24C32SC		“ 0 ”		
BRCM24C32SC			BRCM24C32SC	
(5)				

/ Functional Description

The lower five bits of the data word address are internally incremented following the receipt of each data word. The higher data word address bits are not incremented, retaining the memory page row location. When the word address, internally generated, reaches the page boundary, the following byte is placed at the beginning of the same page. If more than 32 data words are transmitted to the BRCM24C32SC, the data word address will roll-over, and previous data will be overwritten. The address roll-over during write is from the last byte of the current page to the first byte of the same page.

/ Acknowledge Polling

BRCM24C32SC

/ Functional Description

A Random Read requires a “dummy” byte write sequence to load in the data word address. Once the device address word and data word address are clocked in and acknowledged by the BRCM24C32SC, the microcontroller must generate another start condition. The microcontroller now initiates a Current Address Read by sending a device address with the read/write select bit high. The BRCM24C32SC acknowledges the device address and serially clocks out the data word. The microcontroller does not respond with a “0” but does generate a following stop condition (see Figure 8).

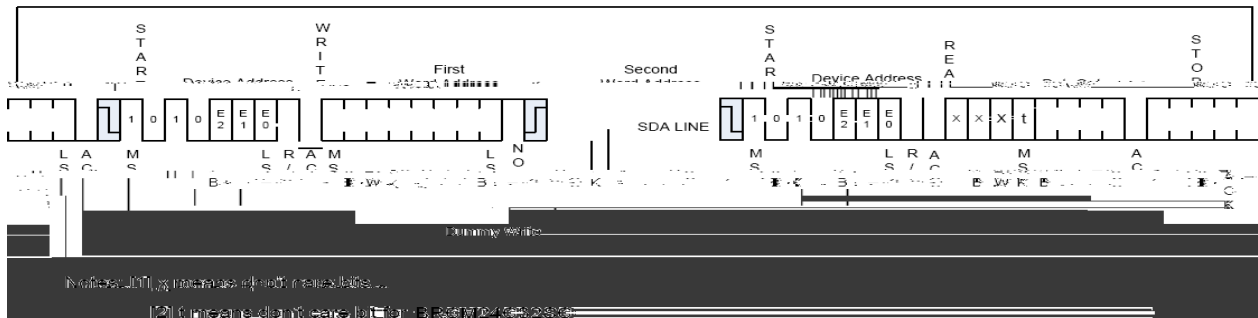


Figure 8 Random Address Read

/ Sequential Read

BRCM24C32SC

“ 0 ”

9

Sequential Reads are initiated by either a Current Address Read or a Random Address Read. After the microcontroller receives a data word, it responds with acknowledge. As long as the BRCM24C32SC receives acknowledge, it will continue to increment the data word address and serially clock out sequential data words. When the memory address limit is reached, the data word address will roll-over and the Sequential Read will continue. The Sequential Read operation is terminated when the microcontroller does not respond with a “0” but does generate a following stop condition (see Figure 9).

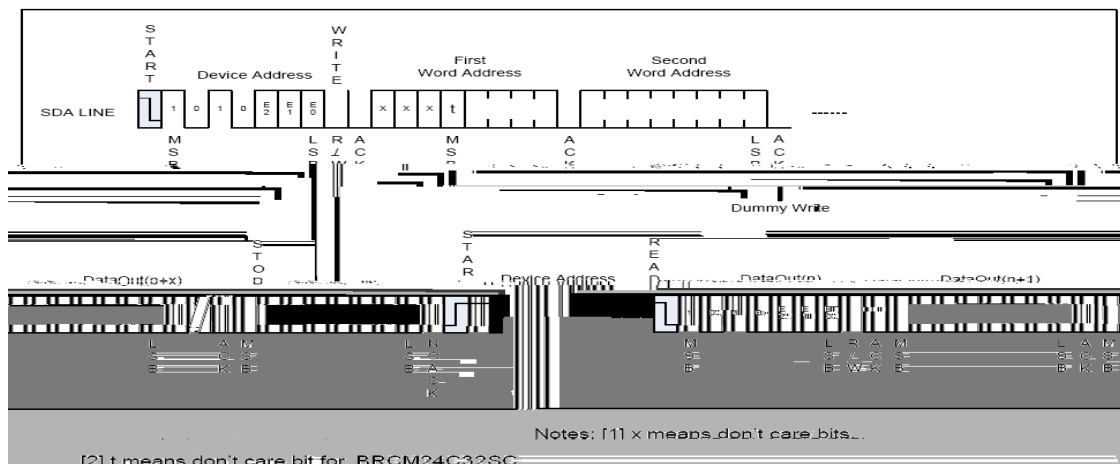


Figure 9 Sequential Read

/ Functional Description

/ Read Identification Page

32				
1011b	A15 / A5	A4 / A0	ID	
		10d	22	ID
32				

The Identification Page (32 bytes) is an additional page which can be written and (later) permanently locked in Read-only mode. The Identification Page can be read by Read Identification Page instruction which uses the same protocol and format as the Read Command (from memory array) with device type identifier defined as 1011b. The MSB address bits A15/A5 are don't care, the LSB address bits A4/A0 define the byte address inside the Identification Page. The number of bytes to read in the ID page must not exceed the page boundary (e.g. when reading the Identification Page from location 10d, the number of bytes should be less than or equal to 22, as the ID page boundary is 32 bytes).

in+ oA4/daton 2201 Twage

)-5.38

Timing diagram for a CAN bus showing a successful transmission of a 10-bit message. The diagram includes a clock signal (128ns period), a CAN signal (16ns period), and an ACK signal (11ns period). The CAN signal shows a successful transmission of a 10-bit message, with the ACK signal indicating successful reception.

Legend:

- A11: 128
- A10: 16
- " 10 ": 11
- 2: 11
- " 10 ": 11

0800h

128


16

128

11

ACK


When the end of the 128-bit serial number is reached (16 bytes of data), continued reading of the extended memory region will result in repeated serial number data readout for the data word address will roll-over back to the beginning of the 128-bit serial number. The Serial Number Read operation is terminated when the microcontroller does not respond with a zero (ACK) and instead issues a Stop condition (see Figure 11)

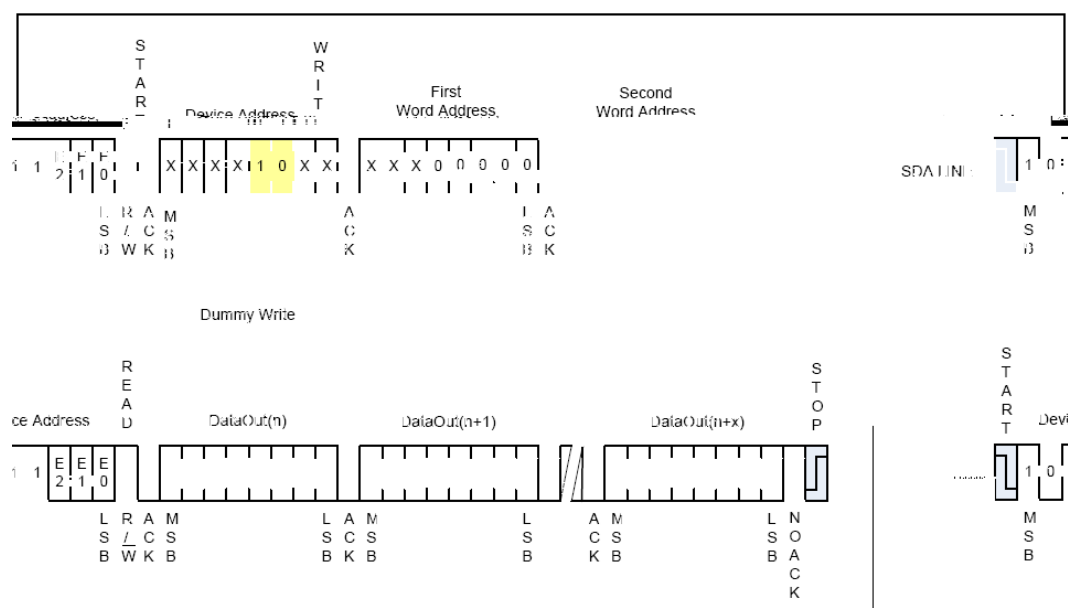


13 / 17

/ Time Sequence Diagram

Bus Timing

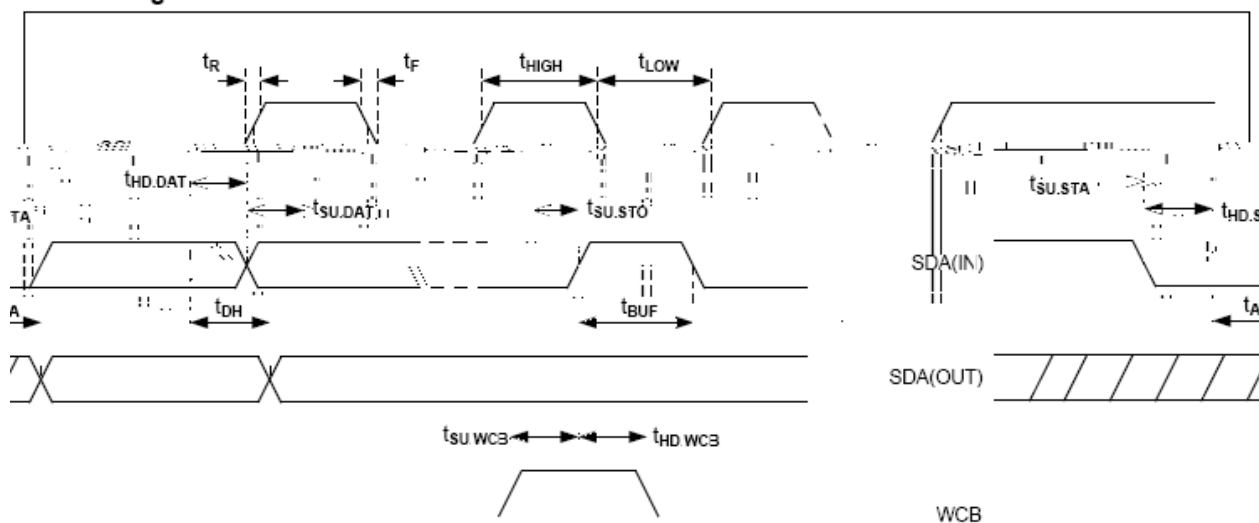


Write Cycle Timing

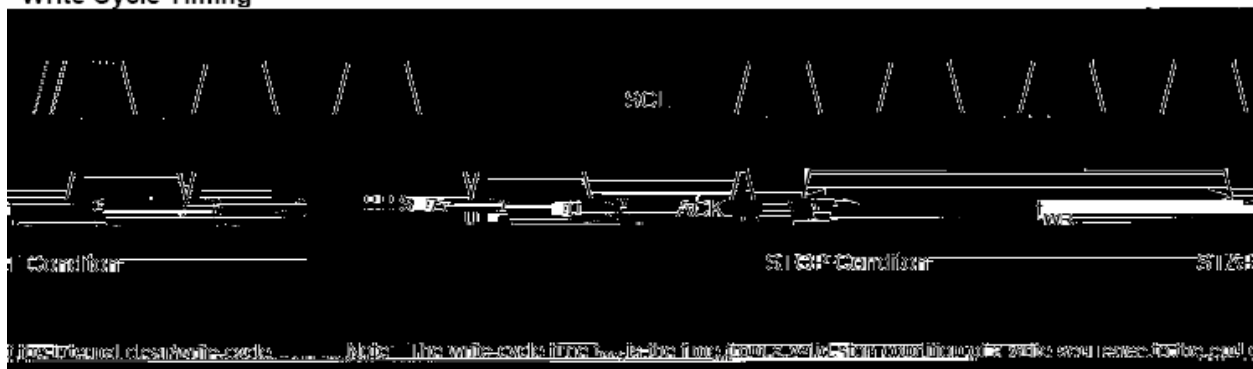

/ Package Dimensions



/ Marking Instructions

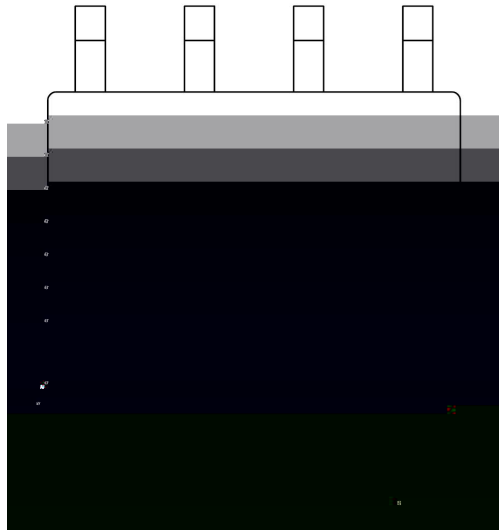

BR


24C32

Note:

BR: Company Code.

24C32: Product Type.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

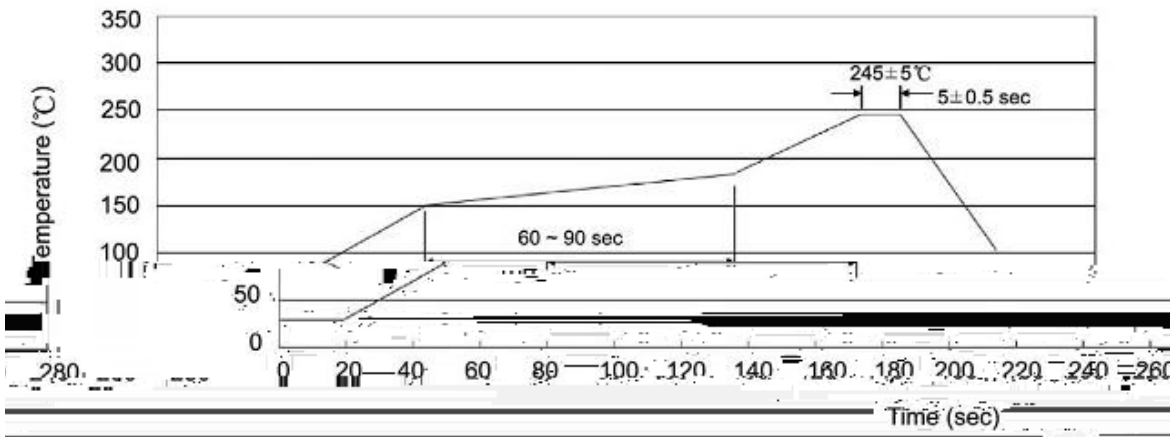

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOP/ESOP-8	4,000	2	8,000	6	48,000	13 ×12	360×360×50	380×335×366