

/ Descriptions


VRW0;<

/ Features


2

/ Applications

/ Equivalent Circuit

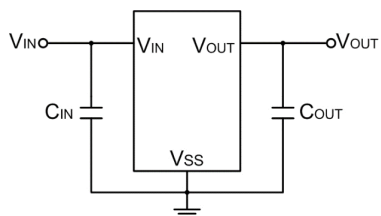

/ Pinning

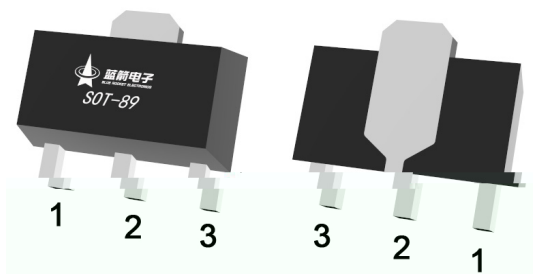

/ Marking

/ Absolute Maximum Ratings(Ta=25)




/ Electrical Characteristics(TA=25 , VIN=VOUT+1V, CIN=COUT=1uF, unless otherwise specified)

	Δ	() ≤ ≤				
	Δ Δ	() ≤ ≤				
	Δ Δ	℃ ≤ ≤ ℃				℃
		,				
		,				
		,				
		,				




/ Electrical Characteristics($T_A=25$, $V_{IN}=V_{OUT}+1V$, $C_{IN}=C_{OUT}=1\mu F$, unless otherwise specified)

						℃
	△					℃

/ Typical Application Circuit

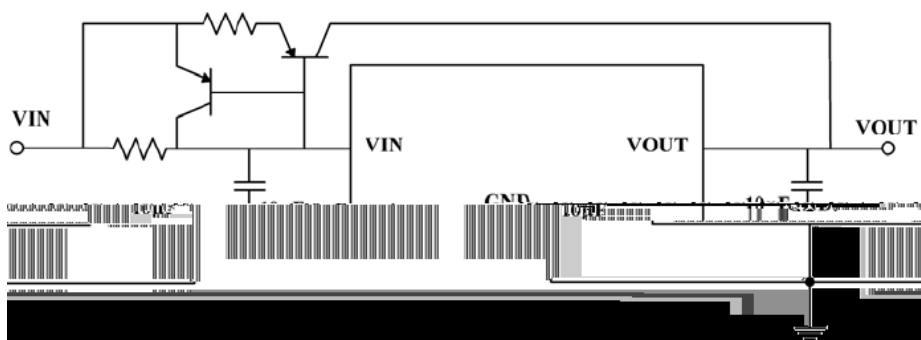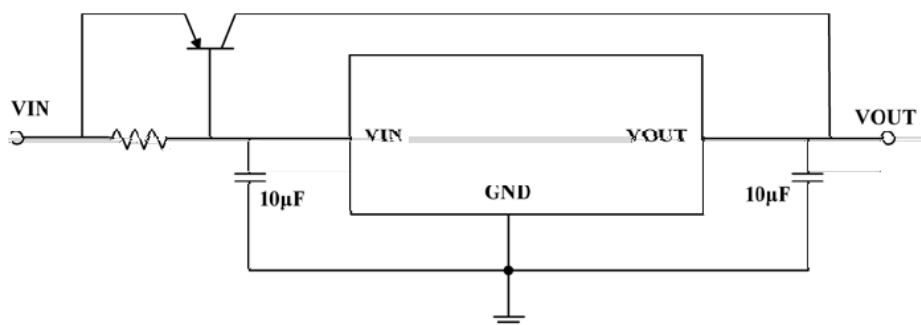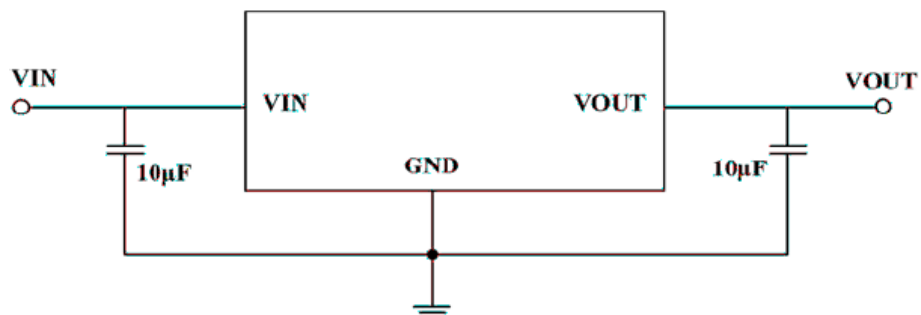


/ Typical Application Circuit

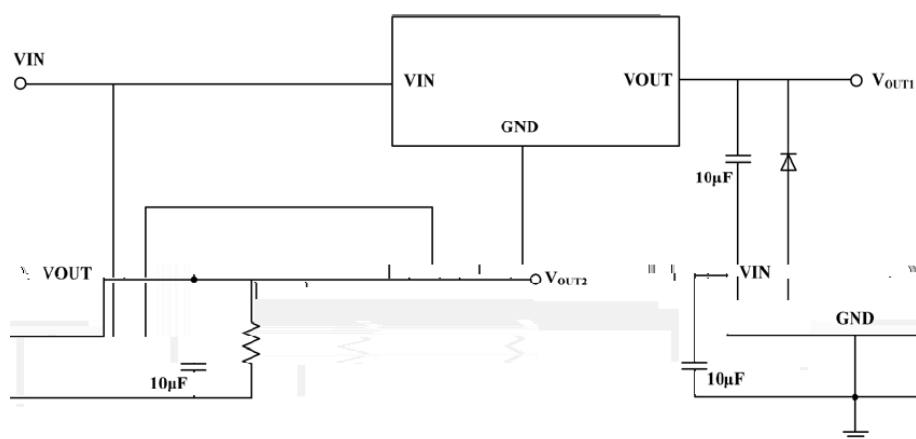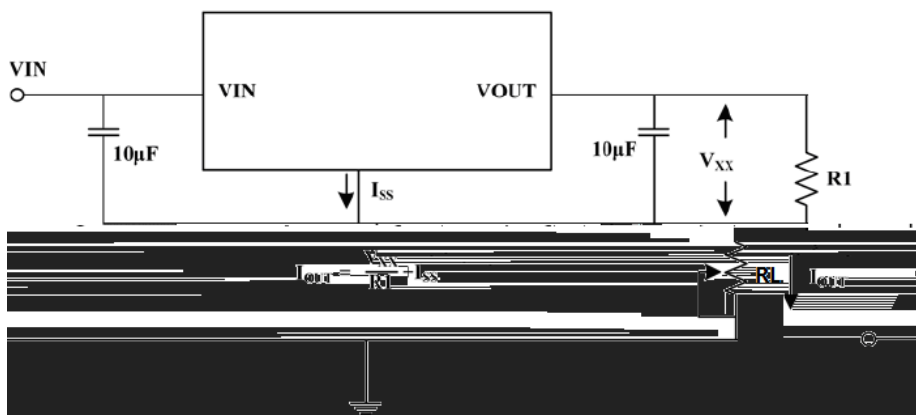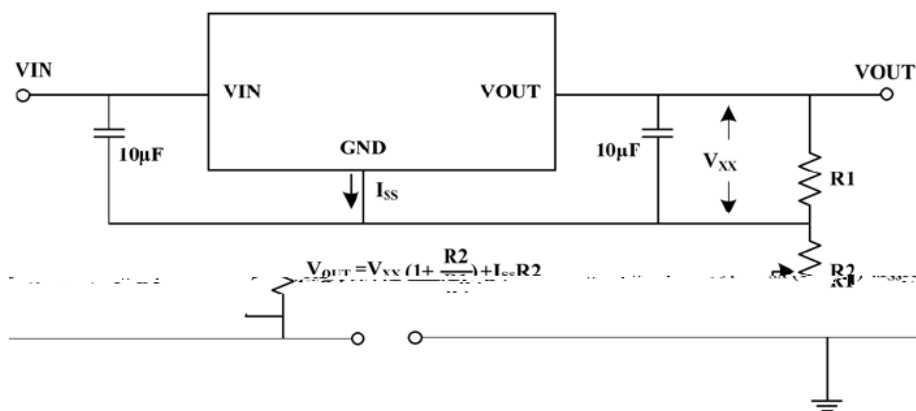

BRCO7350HT

/ Marking Instructions

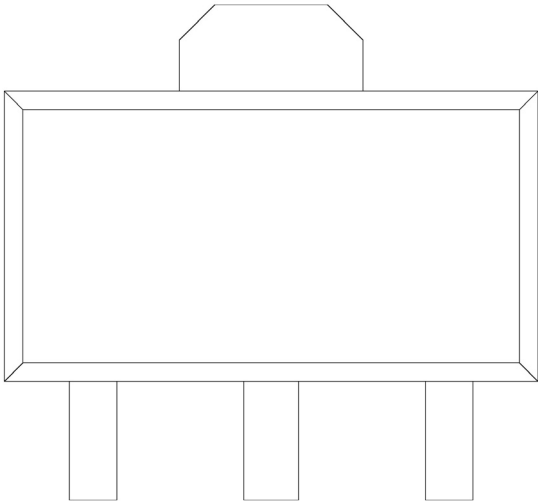

:

BRCO7350HT