




A	2022-8-12	ALL	ALL		




Parameter	Symbol	Rating	Unit
http://www.fsbrec.com /			




/ Basic Application

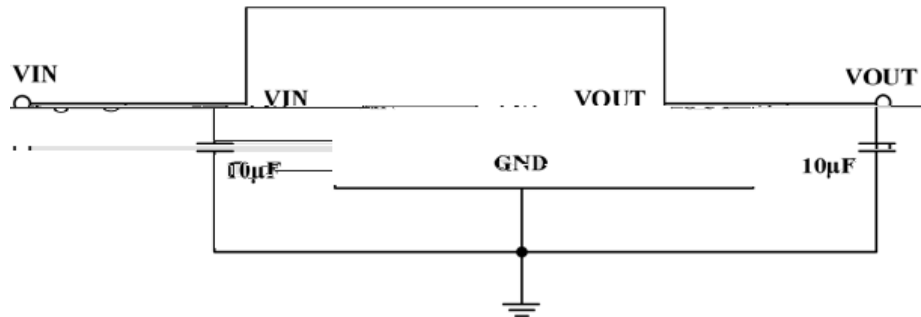

/ High Output Current Voltage Regulator

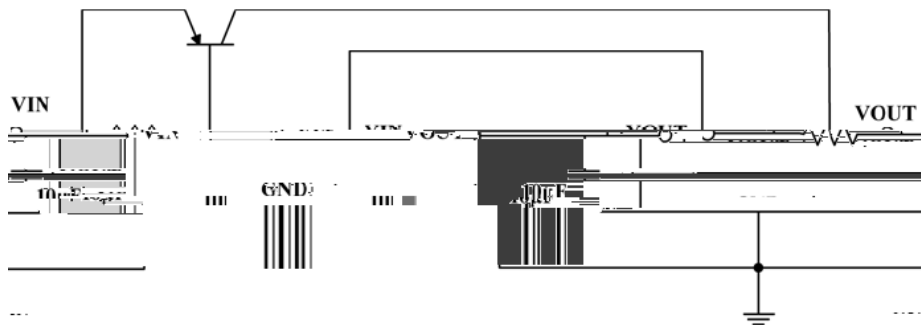

/ Short-Circuit Protection





/ Circuit

n ou



SPT-89


单位: mm



Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
A	4.4	4.7	a1	0.36	0.56
B	2.05	2.65	a	0.36	0.56





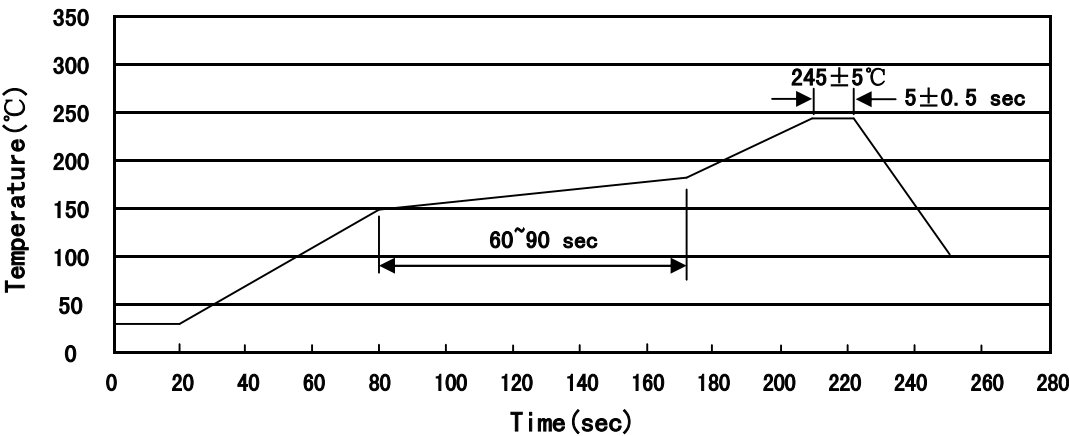

- Note:
- 1

150 180

60 90sec;

2

245±5

5±0.5sec;

3

2 10°C/sec.
- 1.Preheating:150~180°C, Time:60~90sec.

2.Peak Temp.:245±5°C, Duration:5±0.5sec.

3. Cooling Speed: 2~10°C/sec.

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SOT-89	1,000	7	7,000	6	42,000	7" ×12	180×120×180	390×385×205