

/ Descriptions


SOT-89

/ Features


24V	1.5μA	±2%
μ	:±2%	

/ Applications

/ Equivalent Circuit

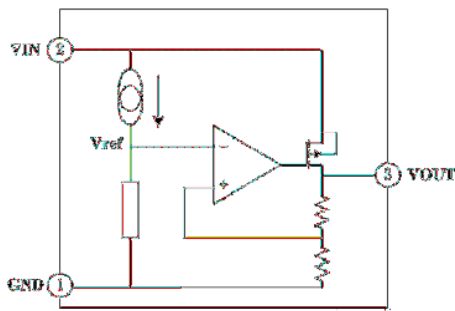


/ Pinning

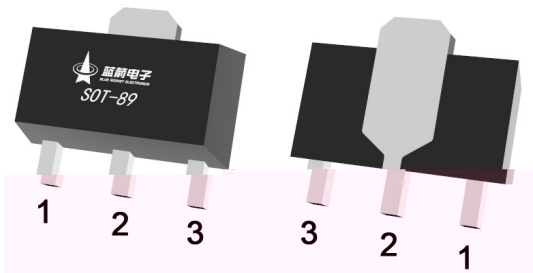

/ Marking

BRC07533MT






DATA SHEET




	θ		

STG


/ Typical Application Circuit

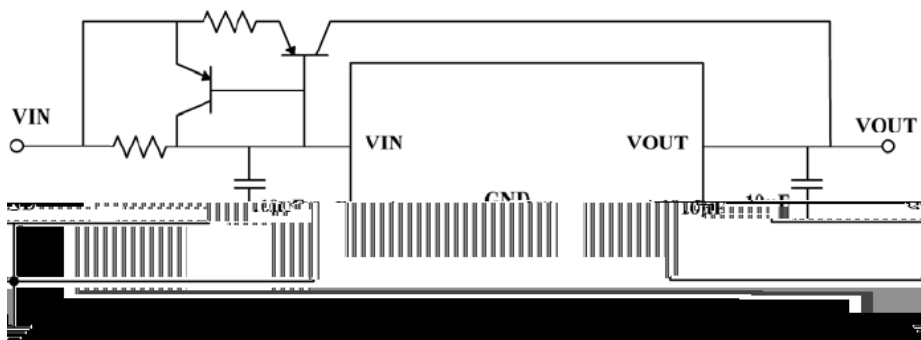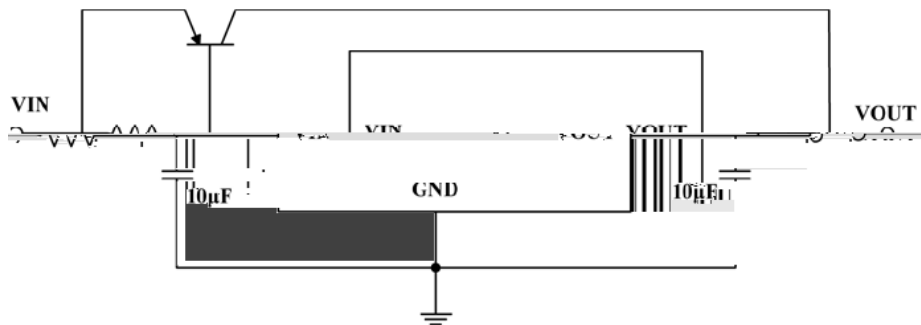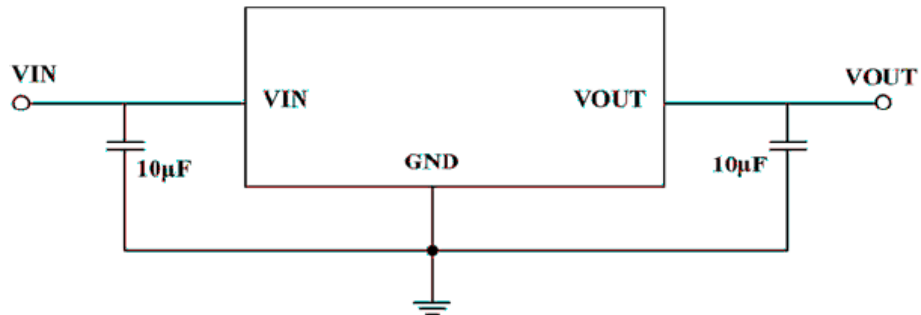


/ Typical Application Circuit

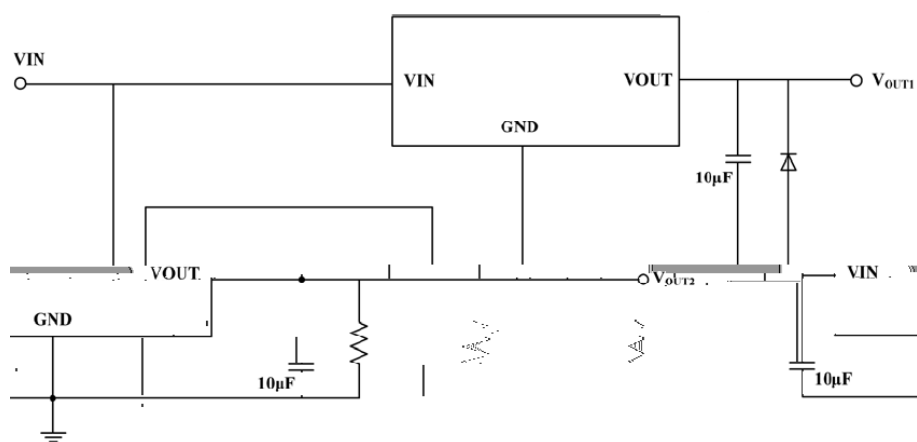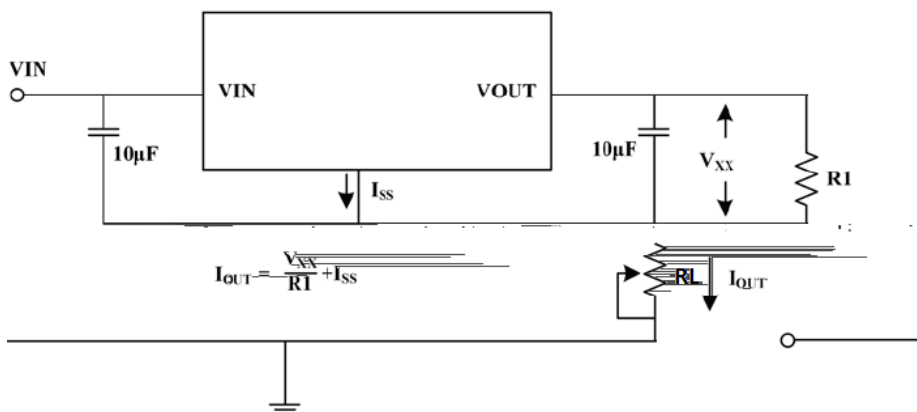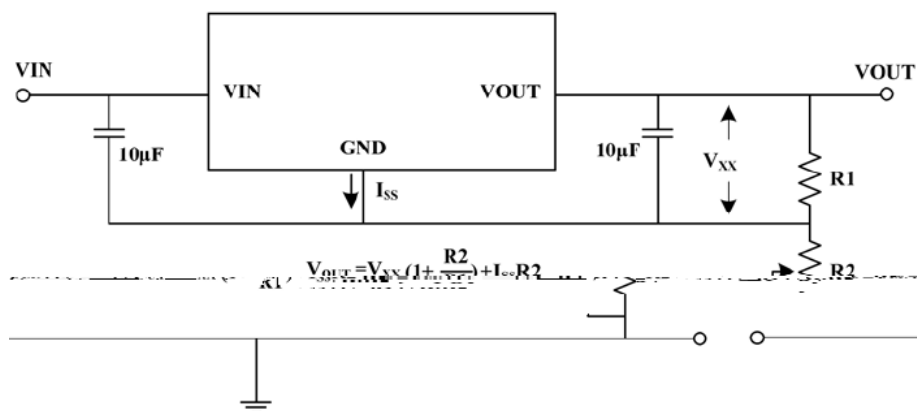

/ Marking Instructions

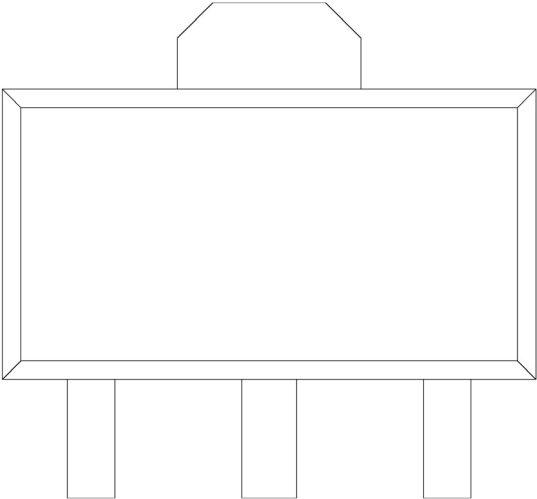

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

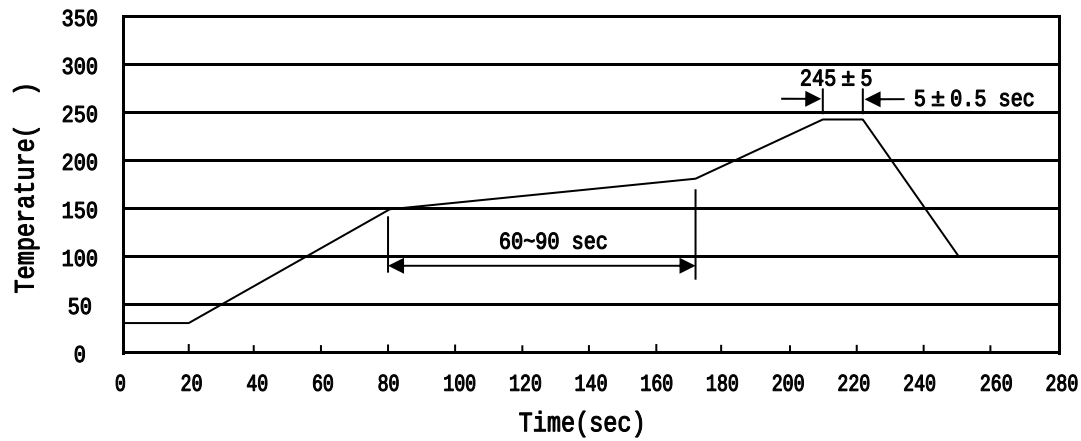 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices