

/ Descriptions


/ Features

- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆


/ Applications

- ◆
- ◆
- ◆
- ◆
- ◆

/ Equivalent Circuit

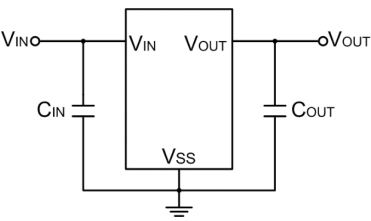

/ Pinning

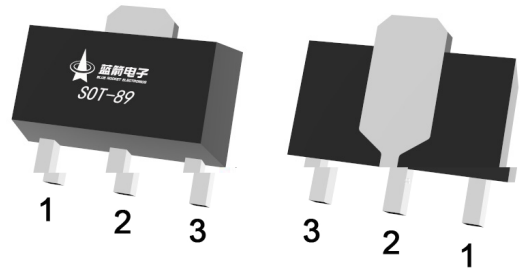






/ Marking

/ Absolute Maximum Ratings(Ta=25)




/ Electrical Characteristics(TA=25 , VIN=VOUT+2V, CIN=COUT=1uF, unless otherwise specified)






/ Electrical Characteristic Curve

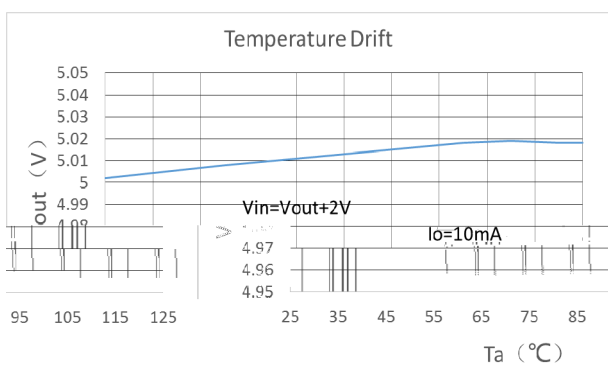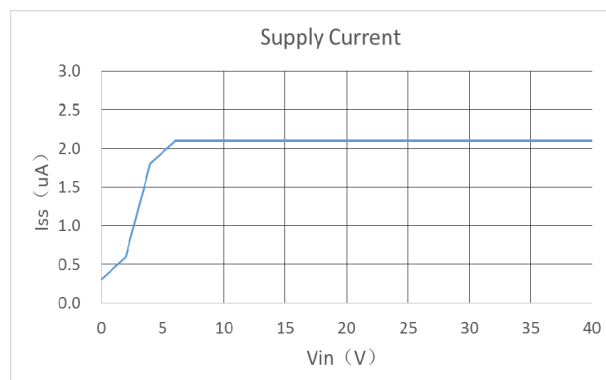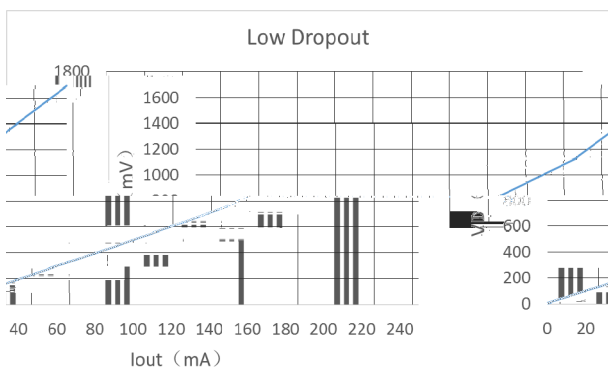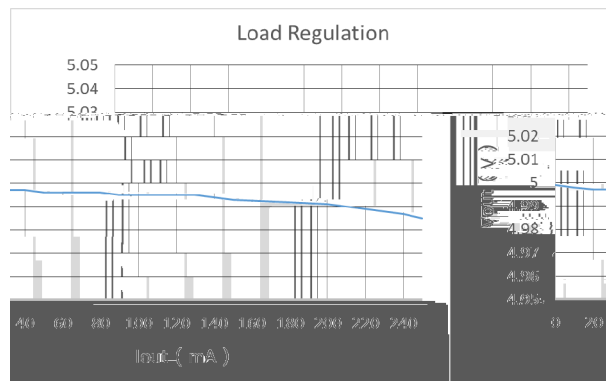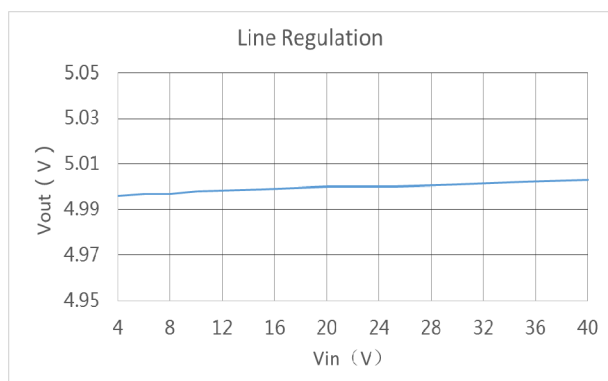

/ Typical Application Circuit

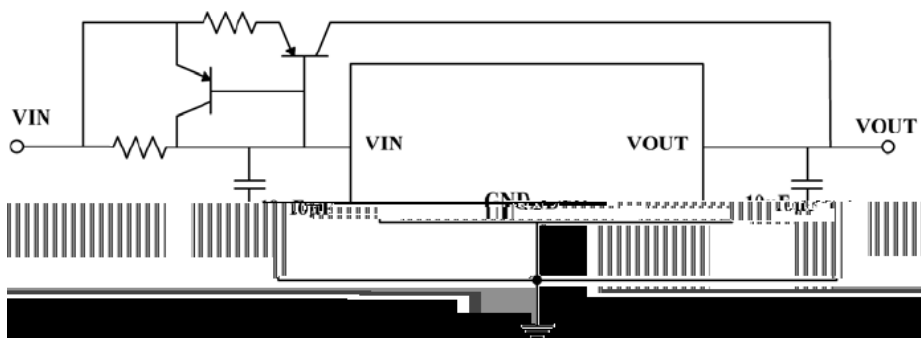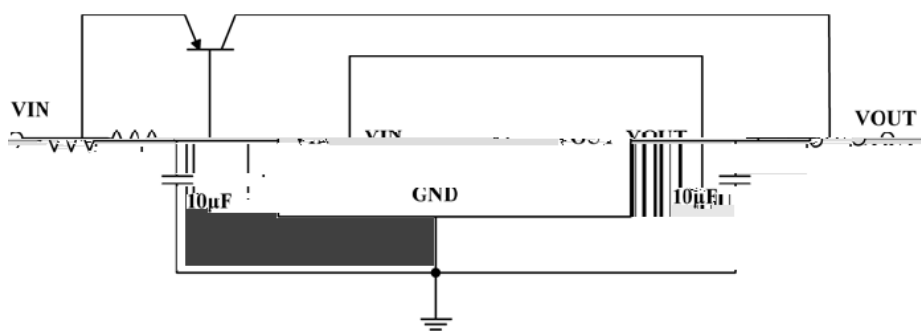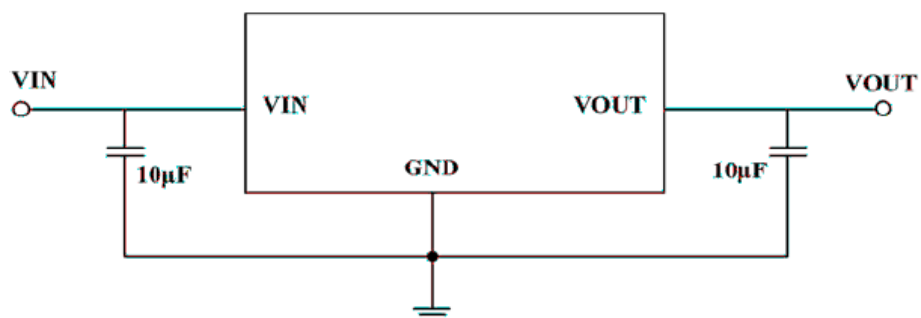


/ Typical Application Circuit

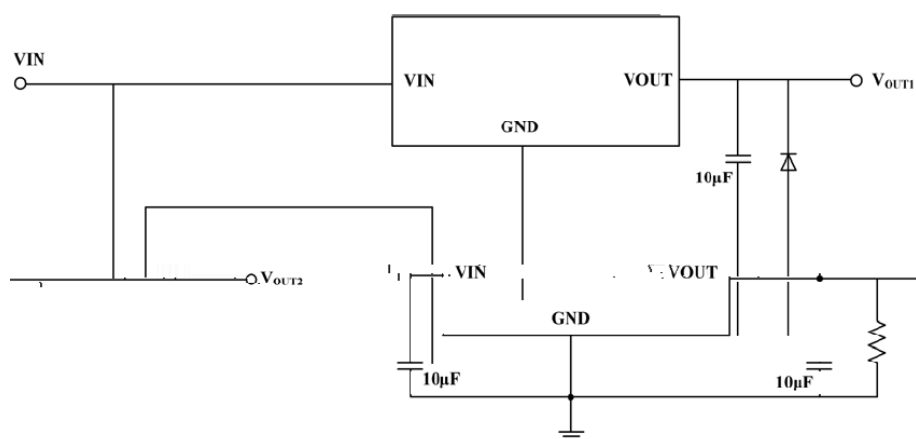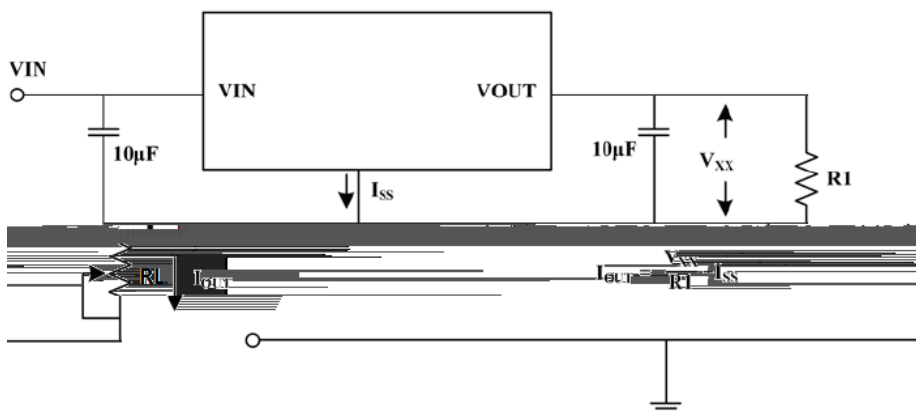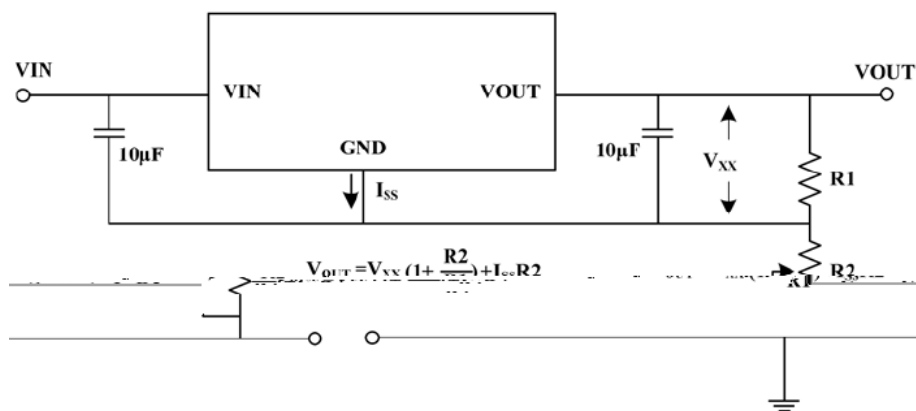


/ Package Dimensions

SOT-89


单位: mm

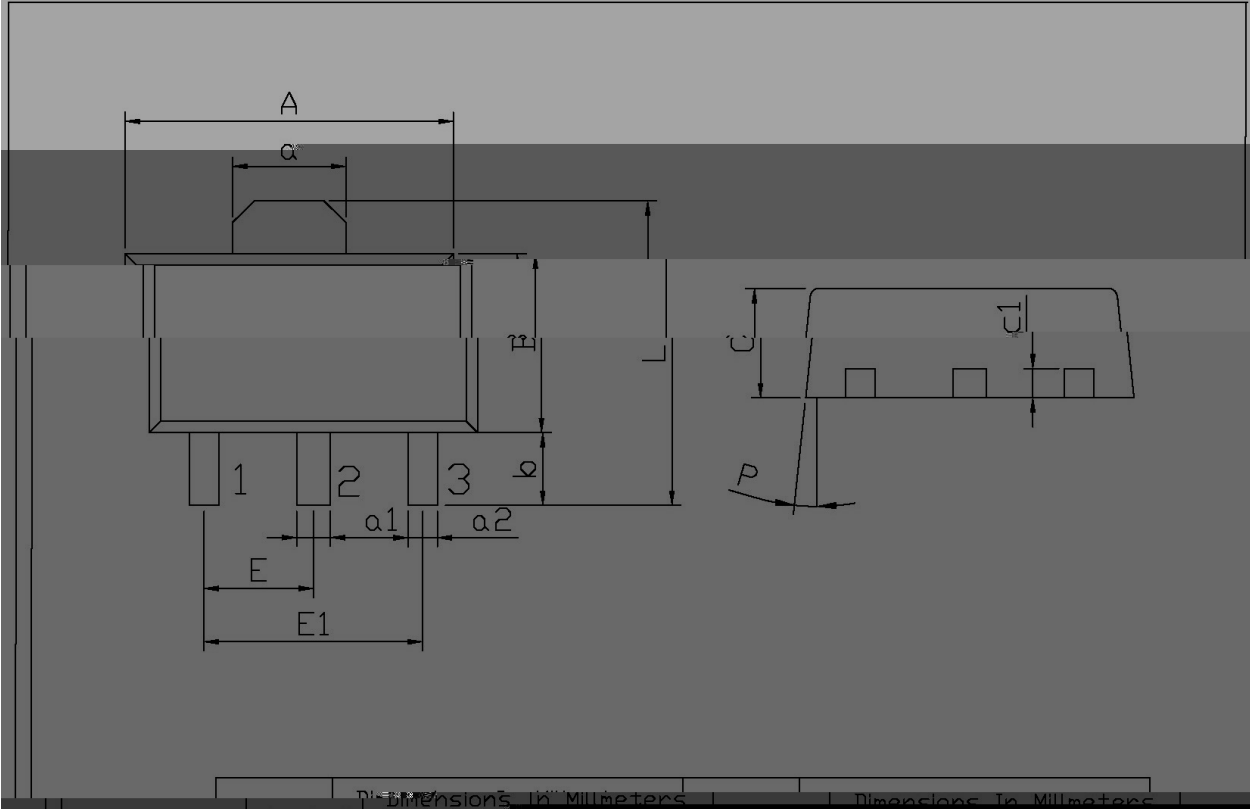

/ Marking Instructions

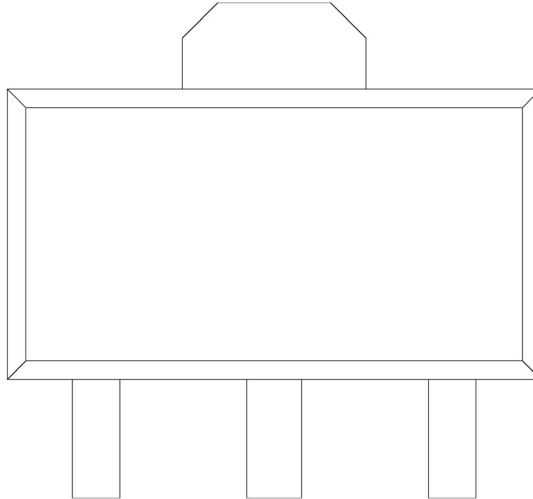

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

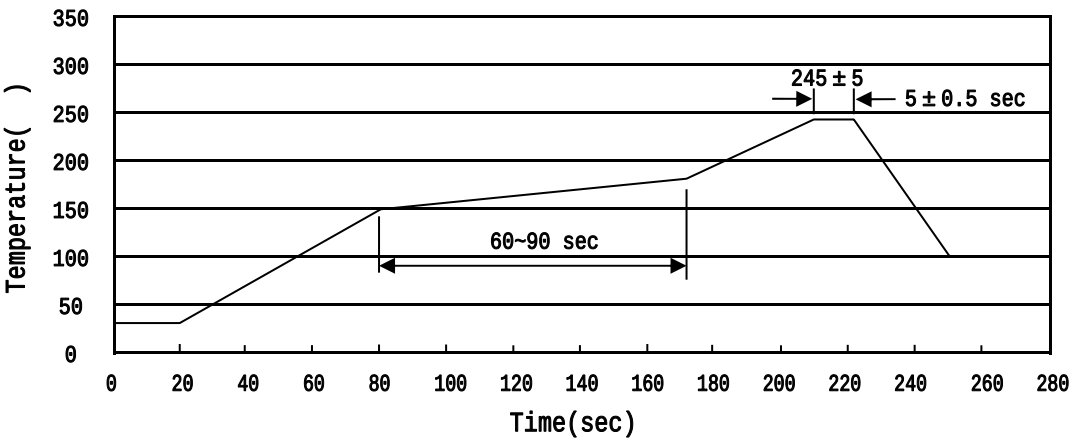

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices