
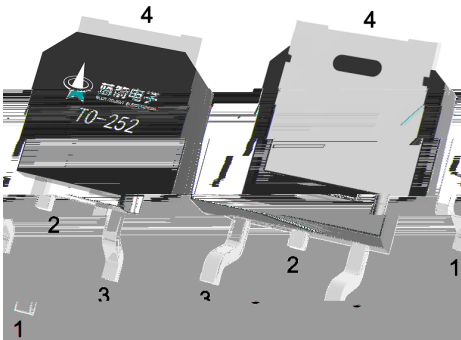


/ Descriptions

/ Features

/ Applications

GF2GF



/ Marking

/ Absolute Maximum Ratings(Ta=25)

			$\pm$	
	$\leq$	θ		
		θ		





/ Electrical Characteristics(Ta=25)

					±	




/ Electrical Characteristics(Ta=25)

		Ω Ω				


/ Electrical Characteristic Curve

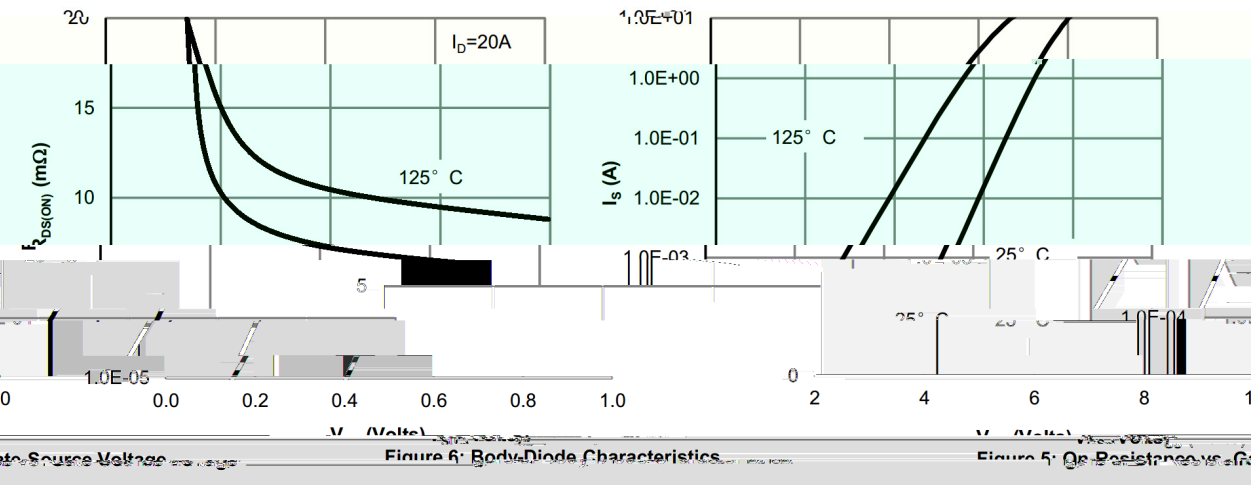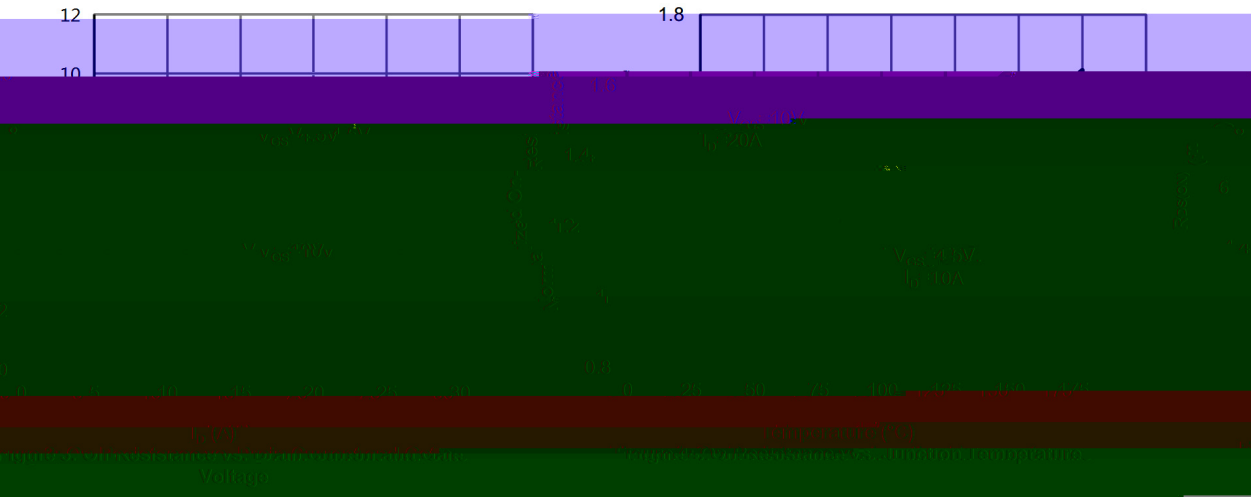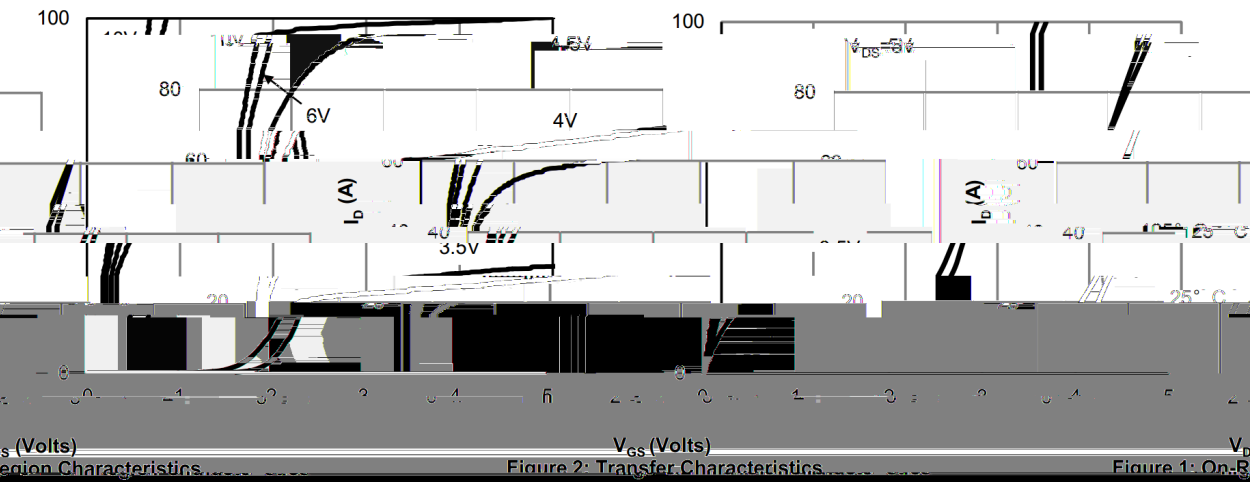

Electrical Characteristic Curve

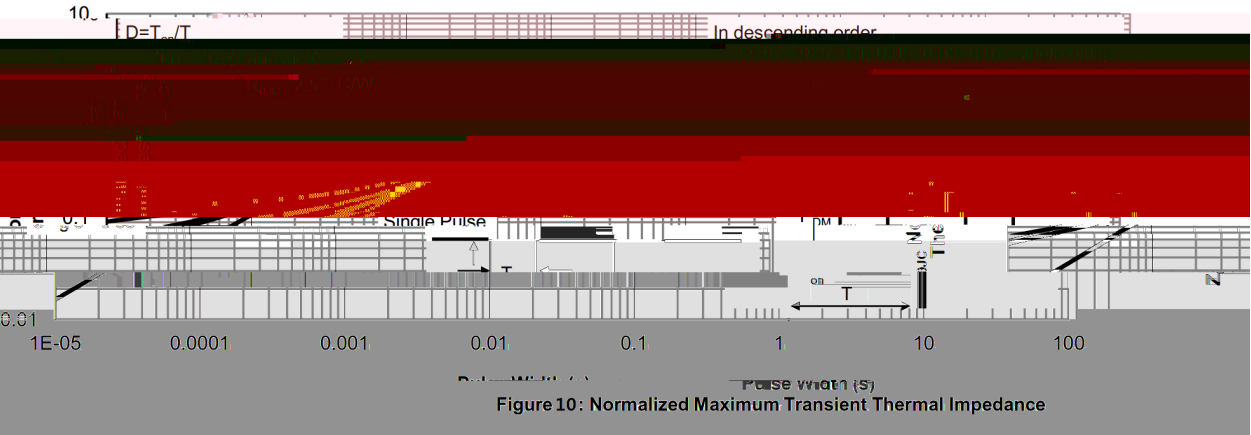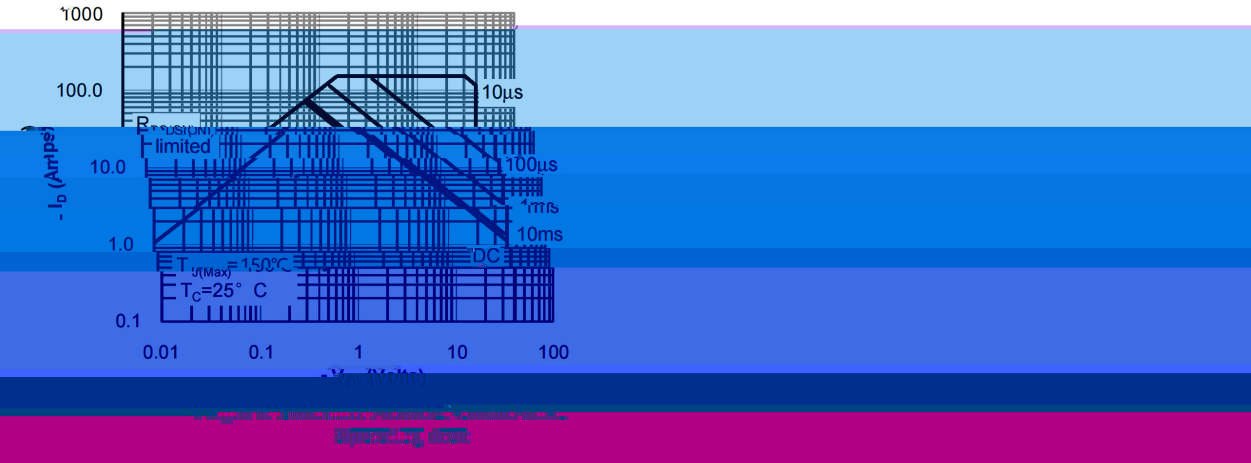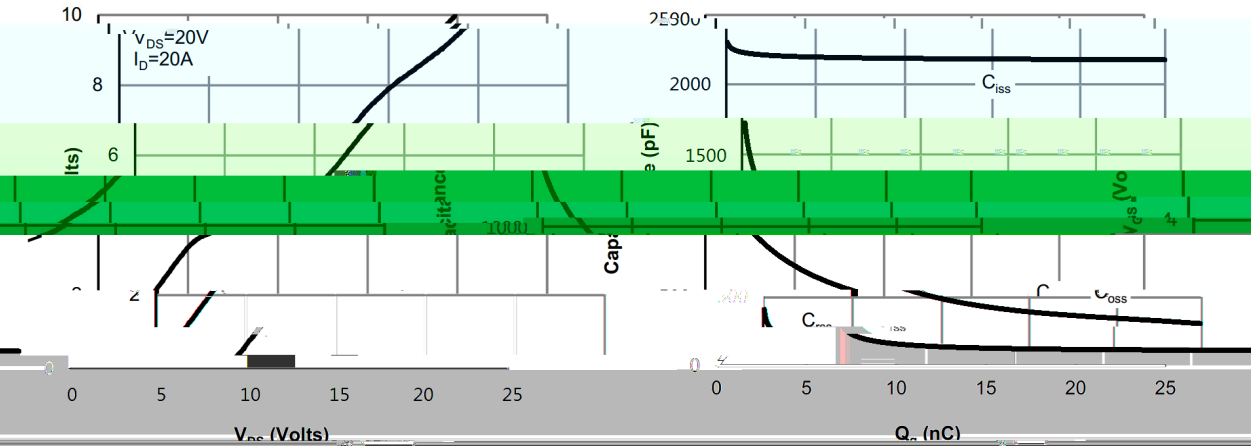

/ Package Dimensions

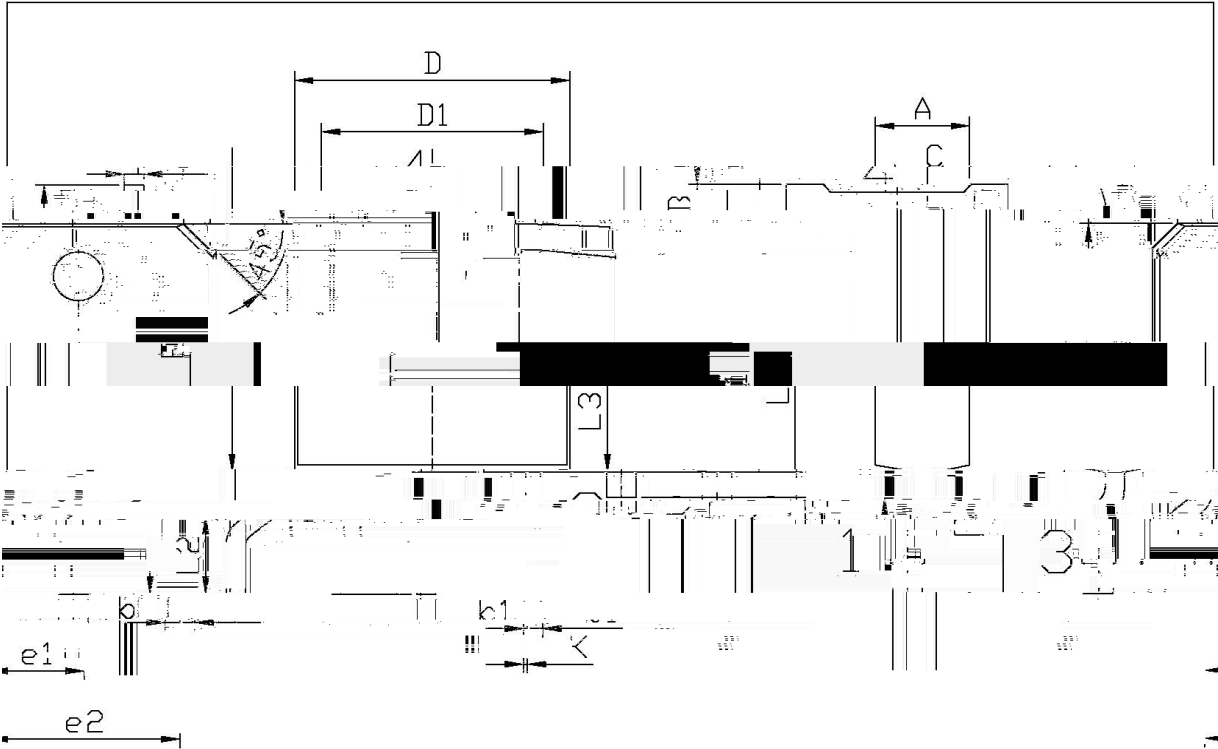


单位: mm

Symbol		Dimensions In Millimeters		Symbol		Dimensions In Millimeters	
		Min	Max			Min	Max
2.40	E	5.95	6.25	4	B	2.20	
2.25	e1	2.24	2.34	0.95	L1	0.95	
0.50	e2	2.40	4.43	0.70	L2	0.70	
0.55	L1	9.85	10.35	0.45	L3	0.45	
0.45	f	0.45	0.55	1.70	D	6.45	
6.75	3	0.60	0.90	0.10	D1		
5.10	5.50	K	0.00	0.10			

TO-252

/ Marking Instructions

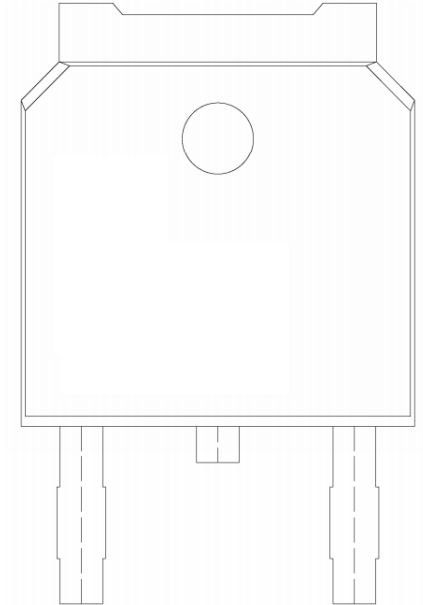


$$\pm \qquad \qquad \qquad \pm$$

8 8