

[illegible]


描述 / Descriptions

特征 / Features

用途 / Applications

DC/DC

内部等效电路 / Equivalent Circuit




引脚排列 / Pinning




印章代码 / Marking

--	--	--	--


电参数曲线图 / Electrical Characteristic Curve

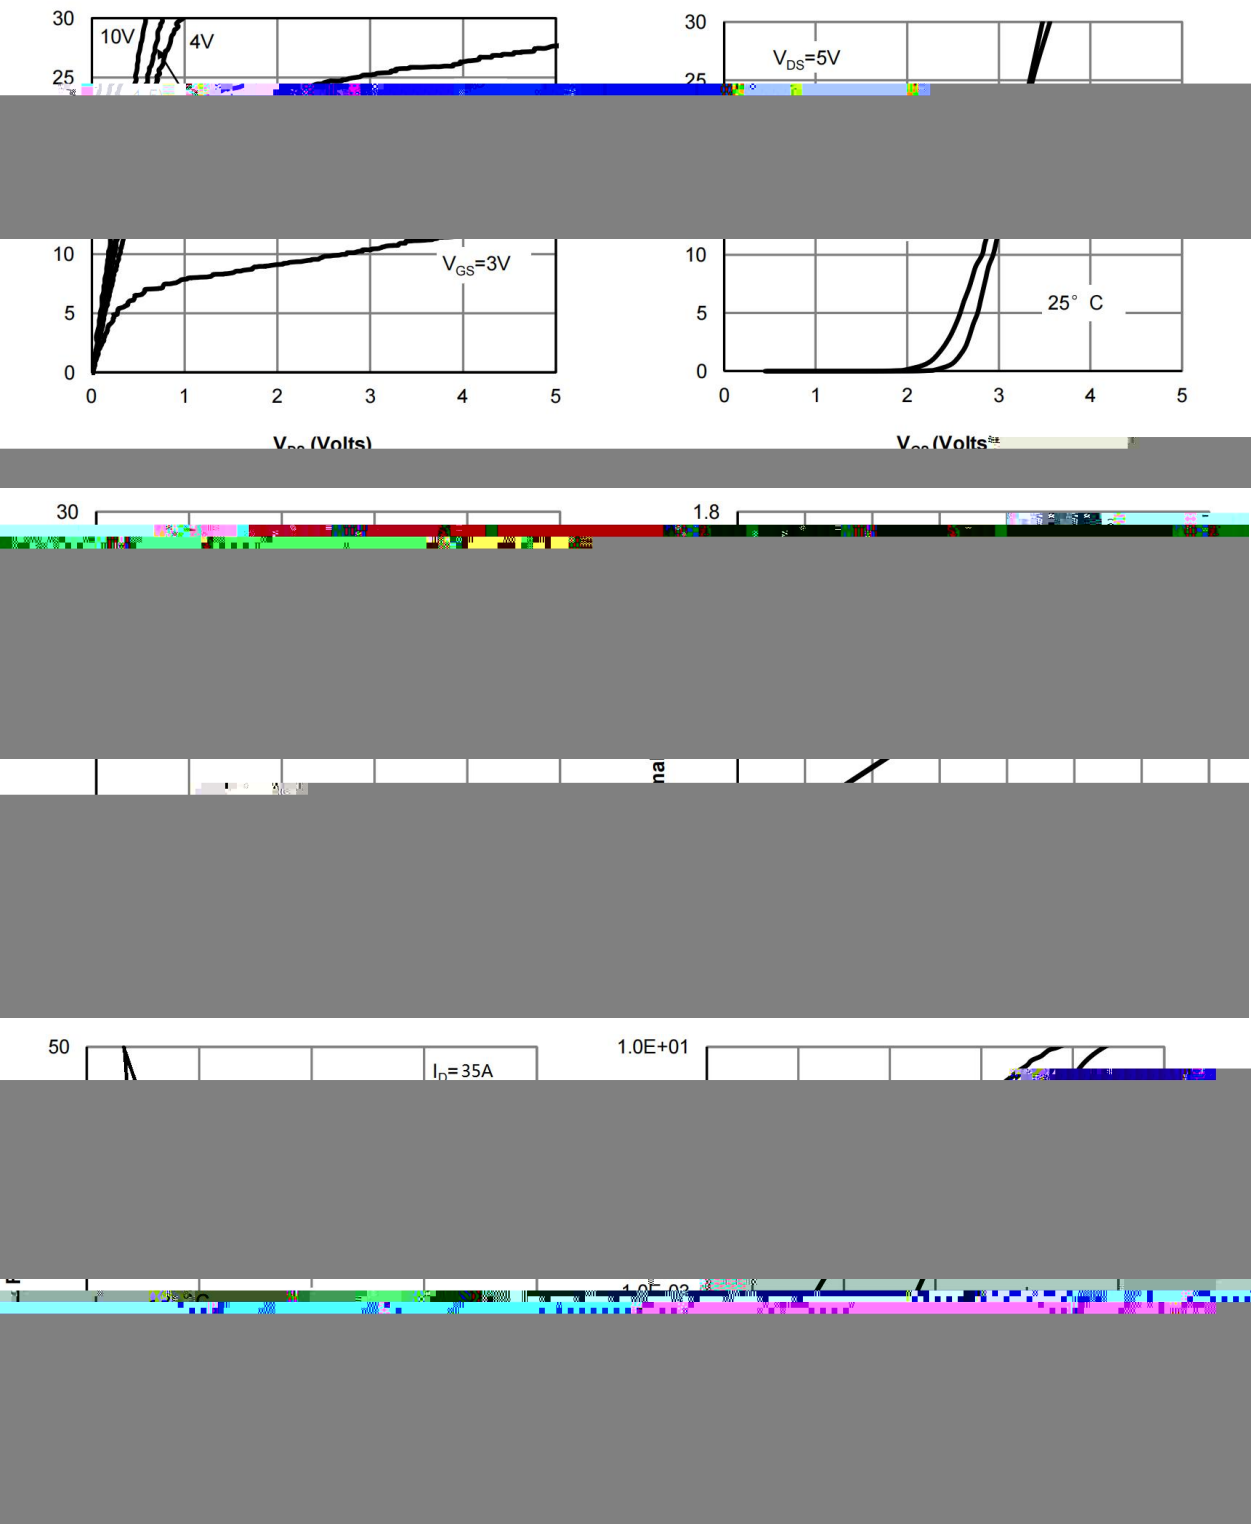

电参数曲线图 / Electrical Characteristic Curve

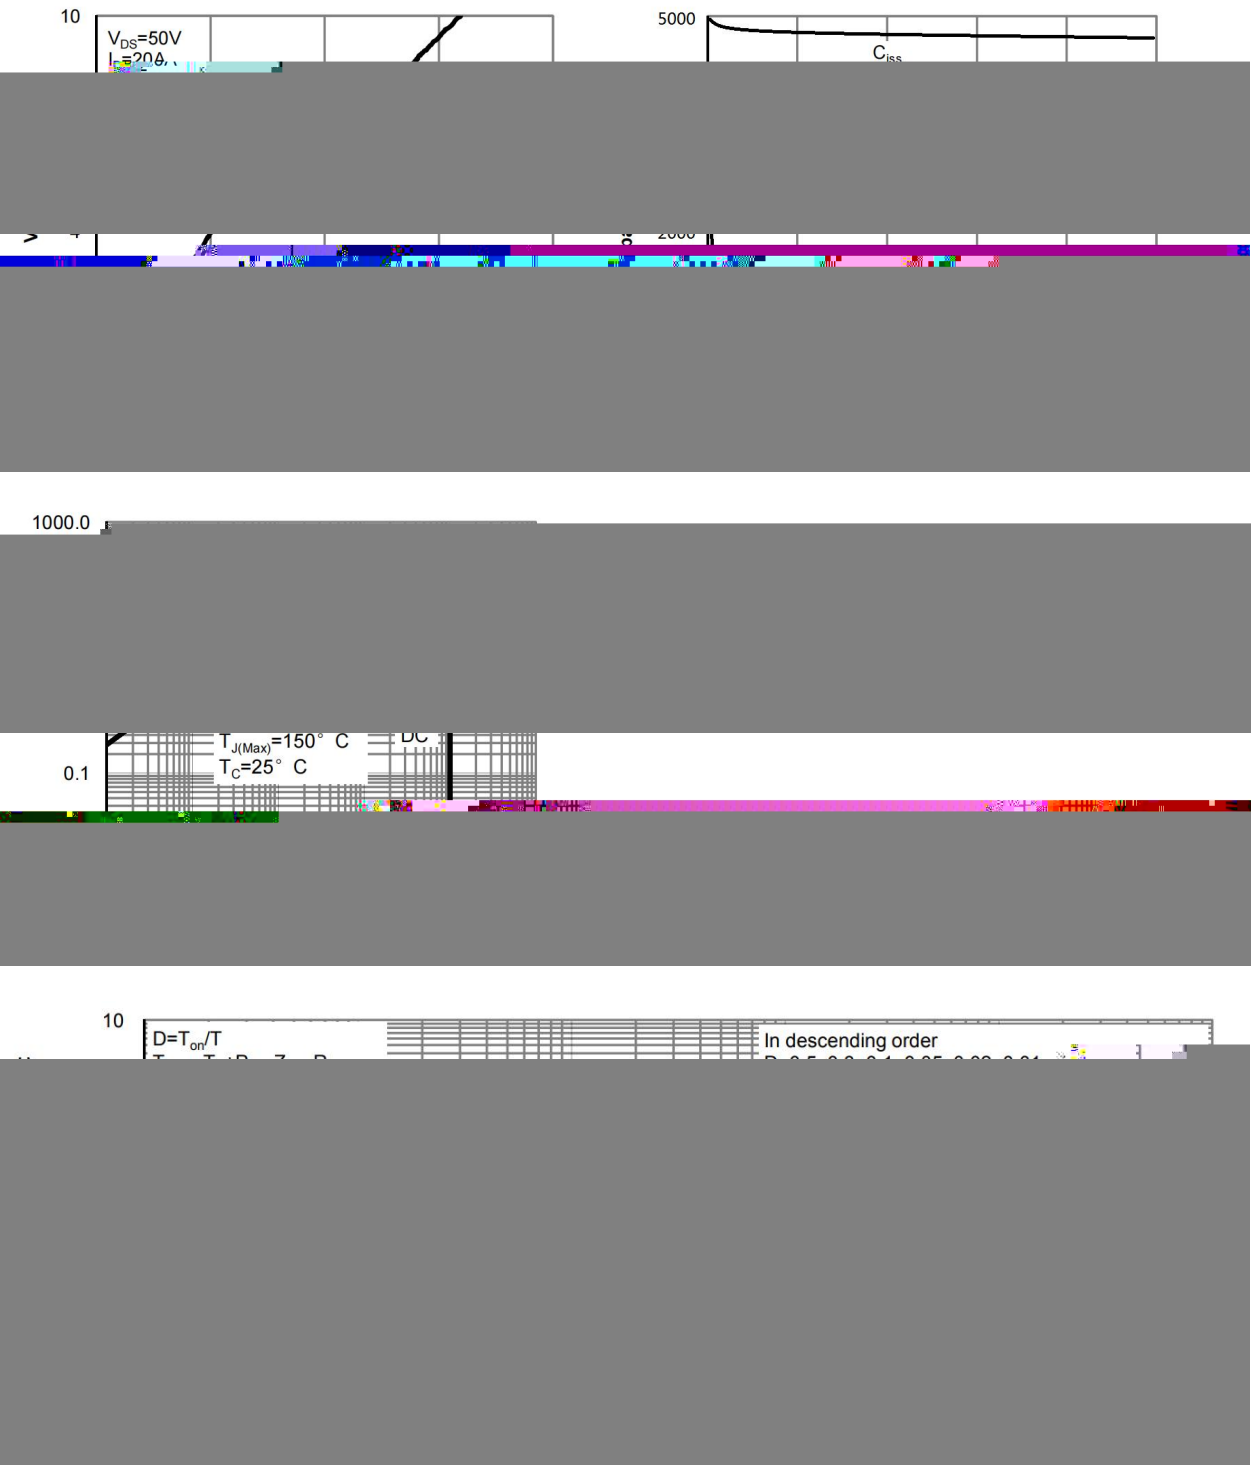


外形尺寸图 / Package Dimensions

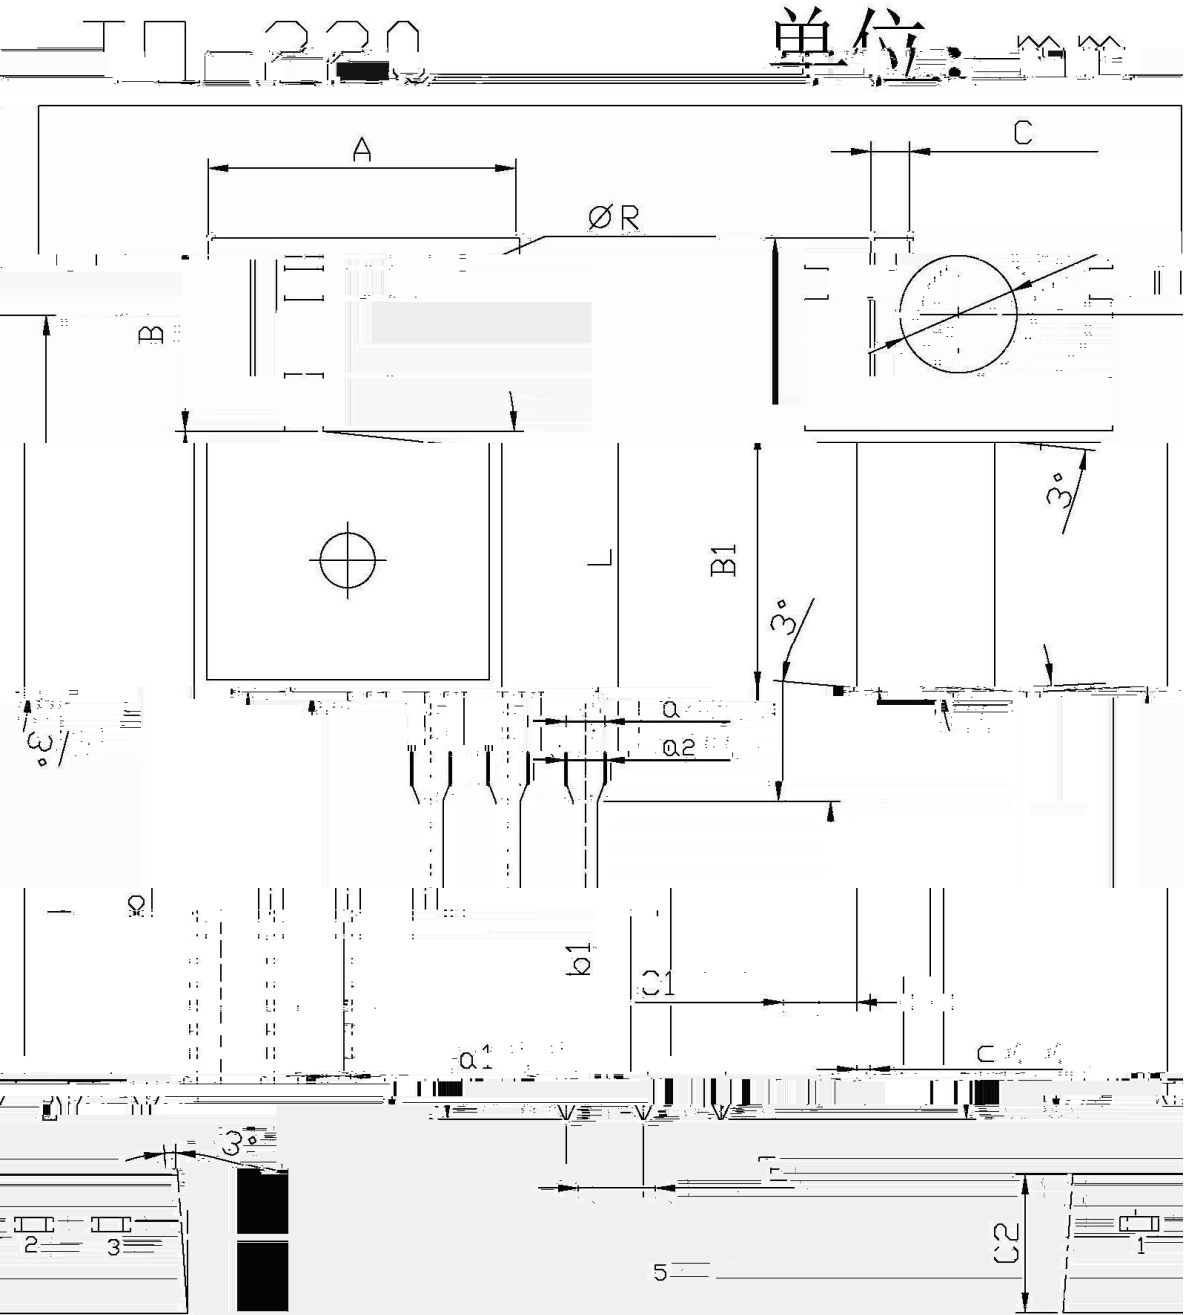


Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
	9.8	10.2		1.2	1.4
	3.56	3.64		6.3	6.7
	15.7	16.1		9.4	9.6
	12.6	13.6		2.6	2.7
	9.6	10.6		1.7	1.9
	1.22	1.32		0.4	0.5

印章说明 / Marking Instructions

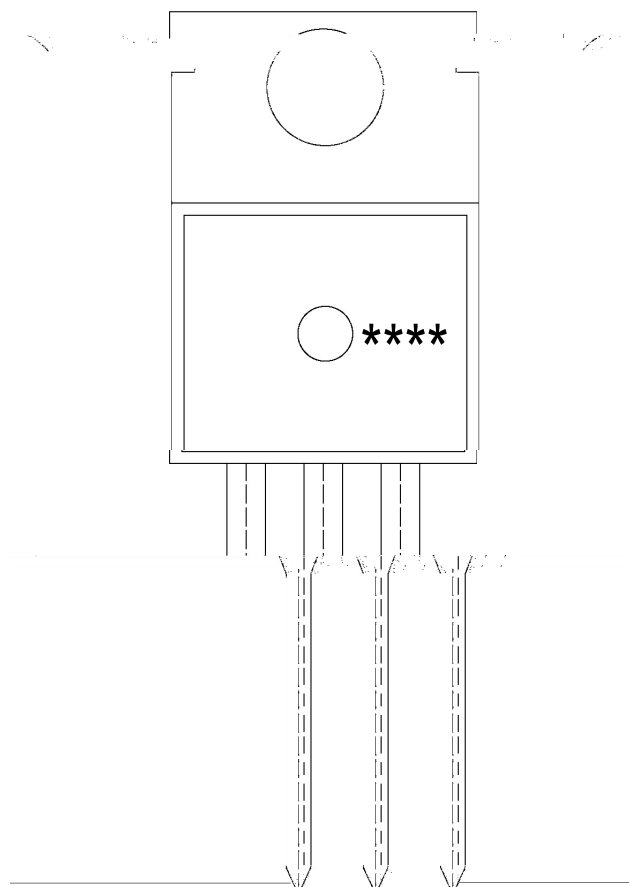

BR

3710L

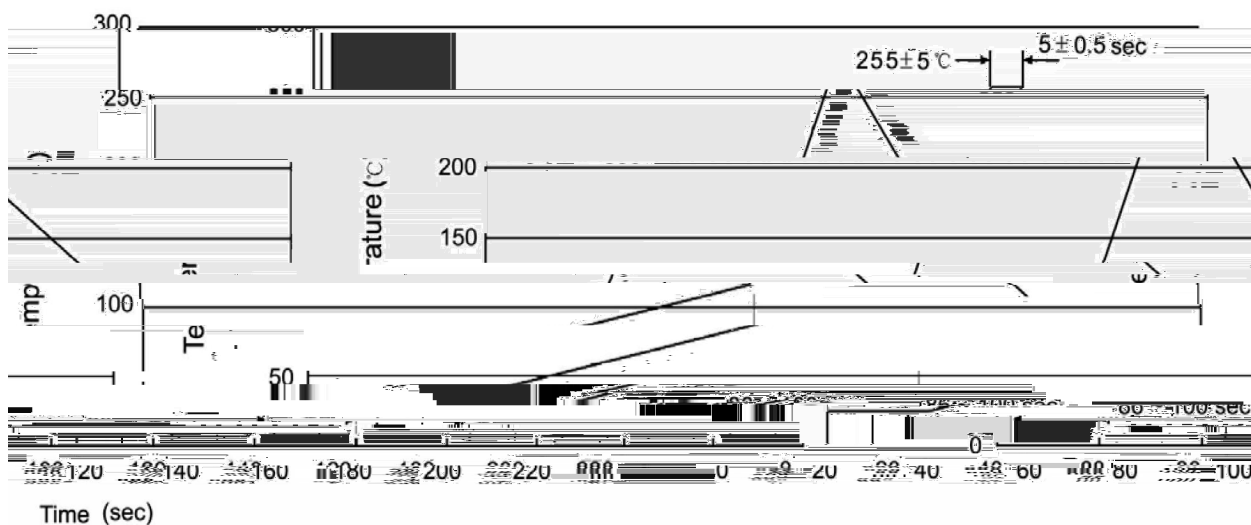
$$\begin{array}{ccccccc} & & & & ^\circ\text{C} & & \\ \pm & & \pm & & \pm & ^\circ\text{C} & \pm \\ & ^\circ\text{C} & & & & ^\circ\text{C} & \end{array}$$

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

$$\pm \text{ }^{\circ}\text{C} \qquad \qquad \qquad \pm \qquad \qquad \qquad \text{ }^{\circ}\text{C}$$

包装规格 / Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag 袋	Inner Box 盒	Outer Box 箱
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

封装形式	包装数量					包装尺寸		
	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube 套管	Inner Box 盒	Outer Box 箱
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

使用说明 / Notices