

BRCS4614YAQ

BRCS4614YAQ






DATA SHEET

N- /N-CHANNEL Electrical Characteristics(Ta=25)

					±	

N- / N-CHANNEL Electrical Characteristic Curve

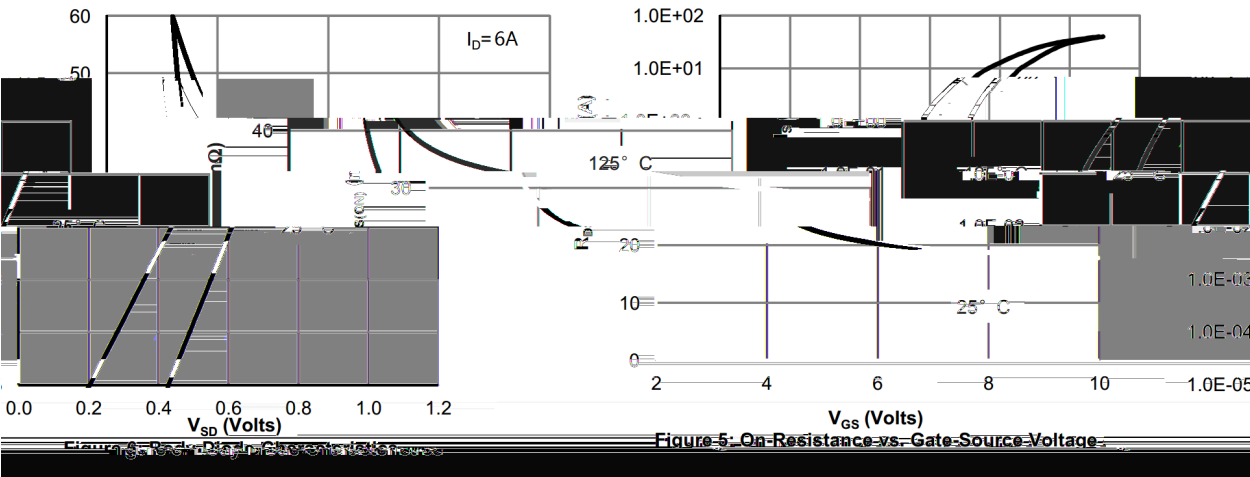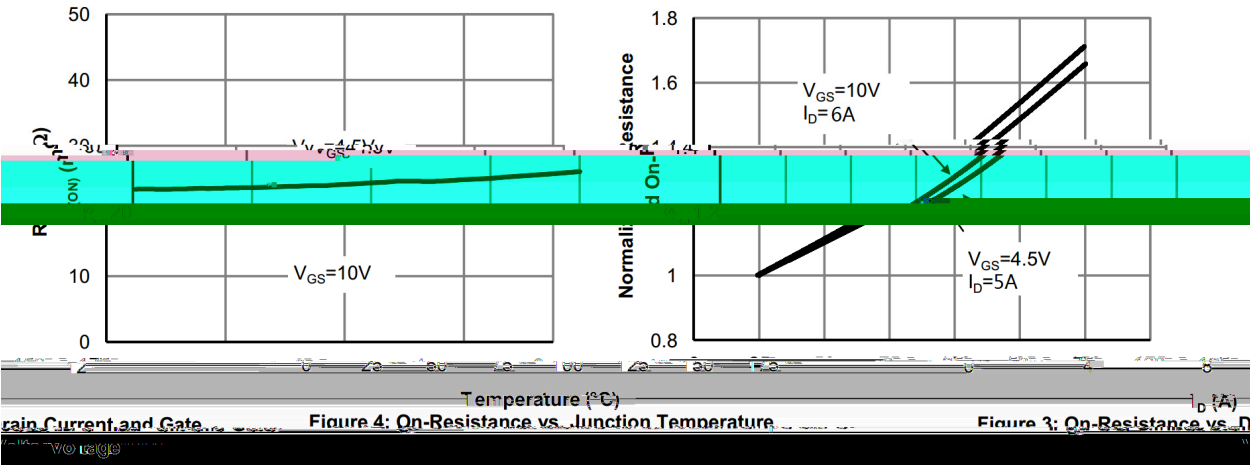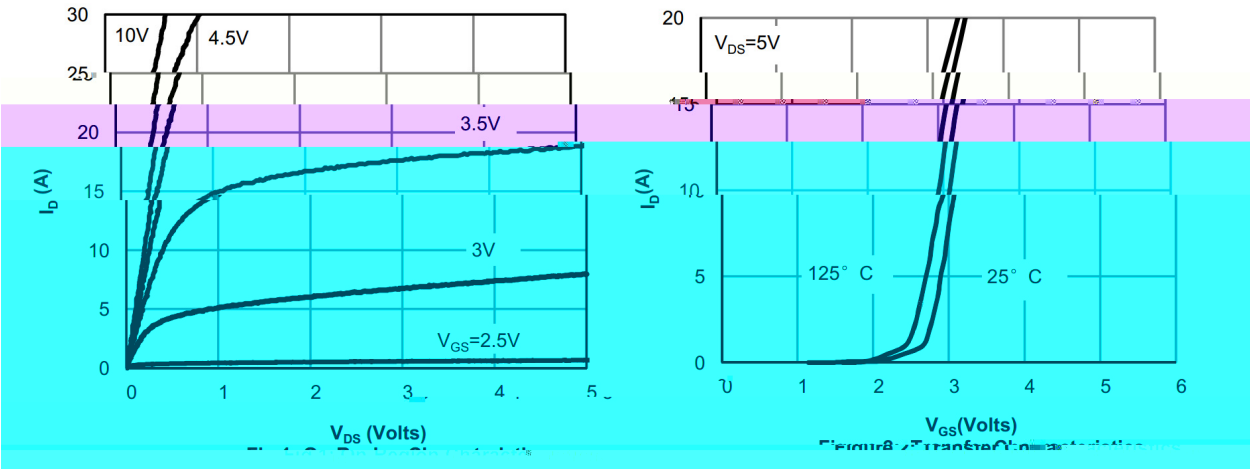

N- / N-CHANNEL Electrical Characteristic Curve

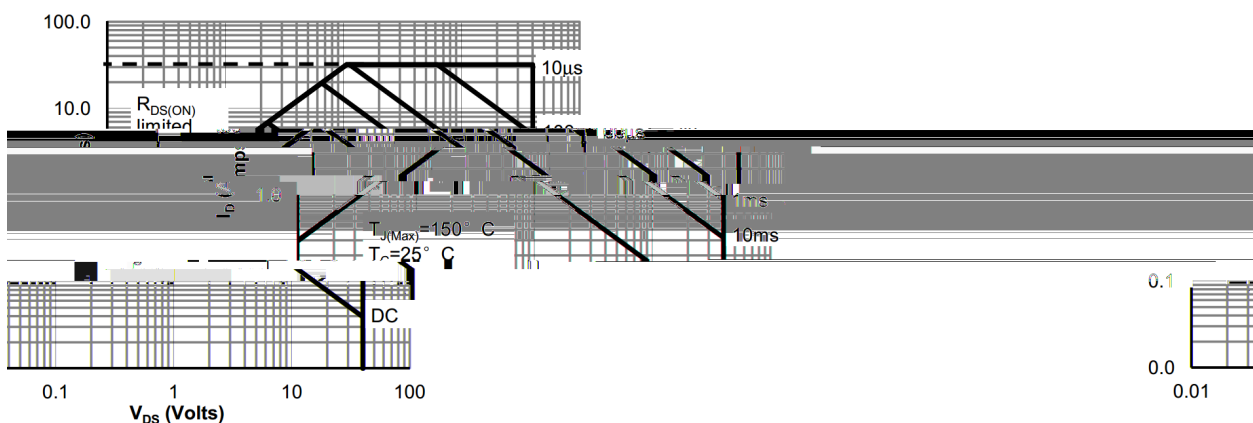
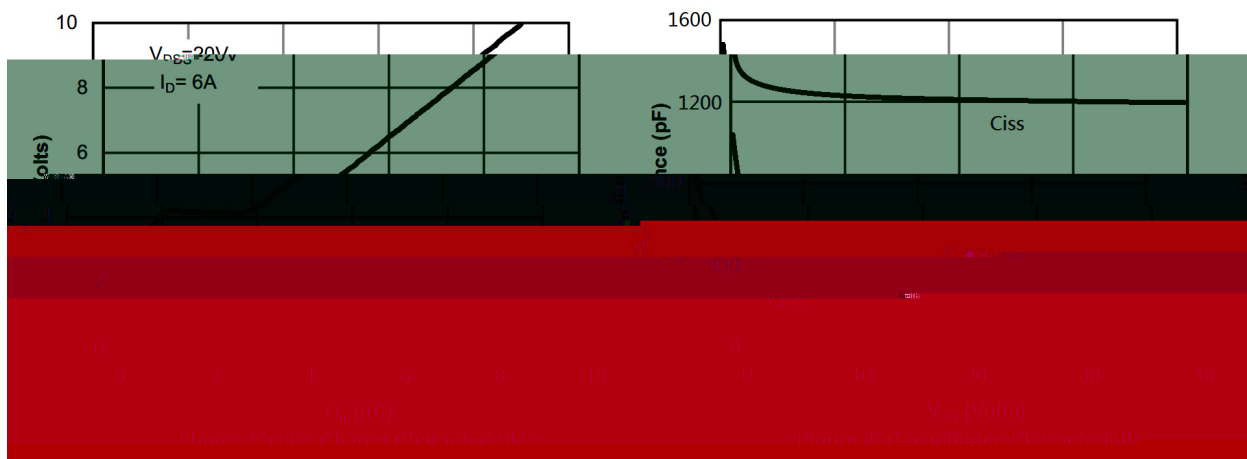


Figure 9: Maximum Forward Biased Safe Operating Area

Fig

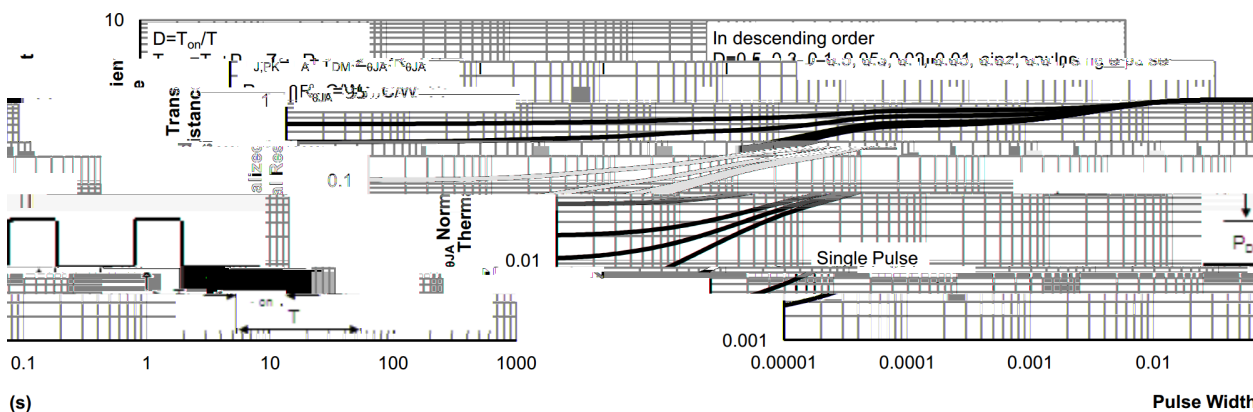


Figure 10: Normalized Maximum Trans

					±	

P- / P-CHANNEL Electrical Characteristic Curve

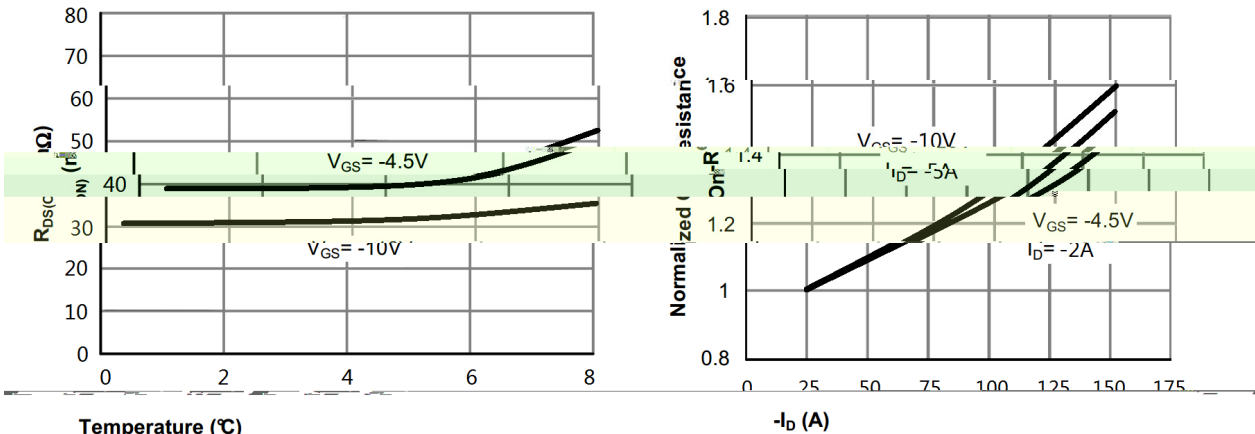
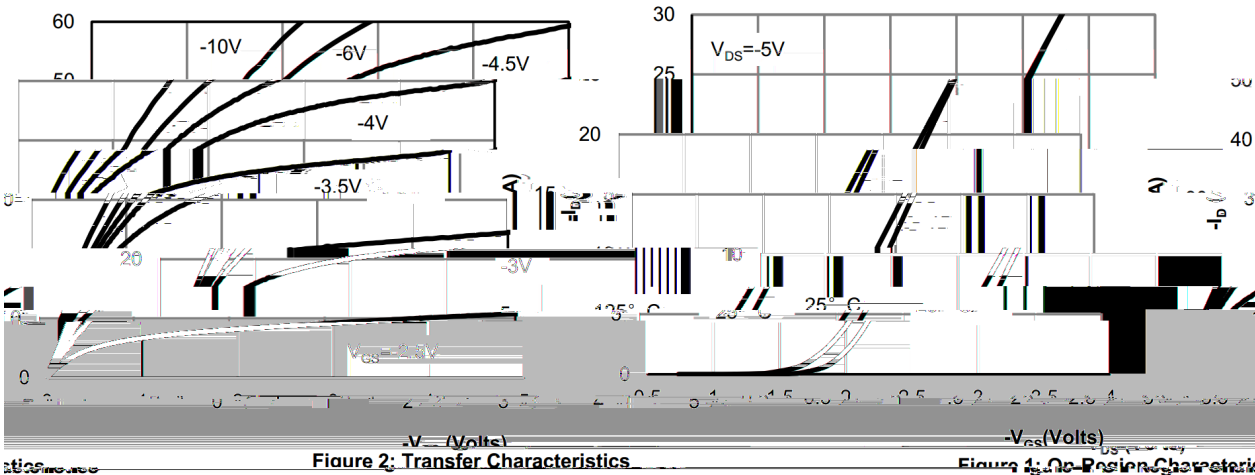


Figure 4: On-Resistance vs. Junction Temperature Figure 5: On-Resistance vs. Drain Current and Gate Voltage

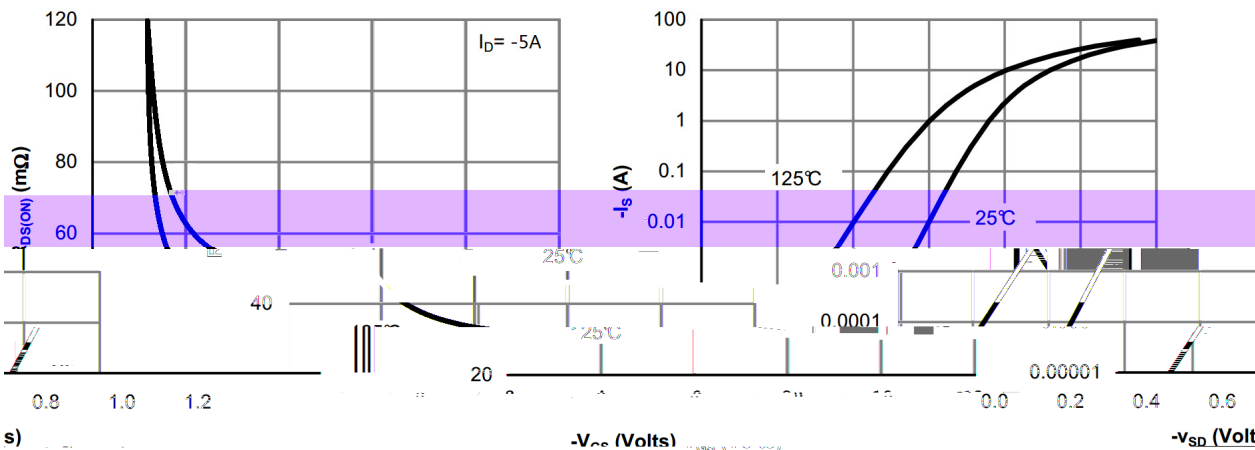
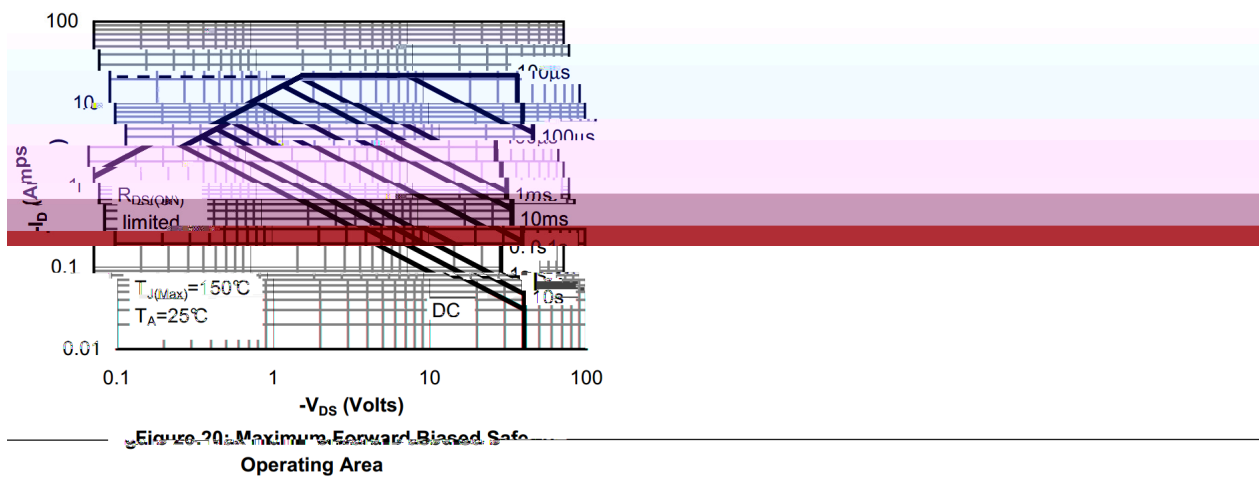
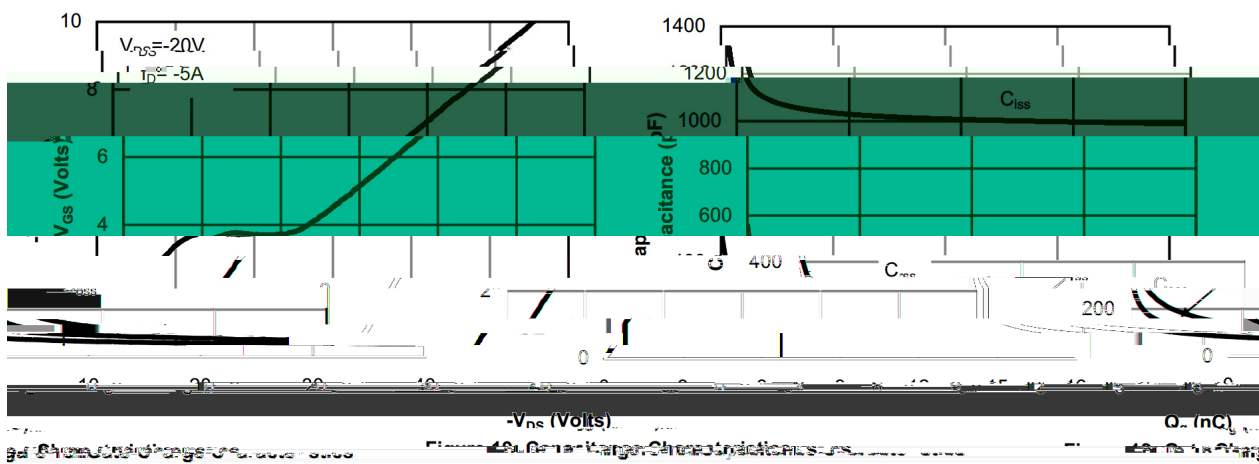



Figure 6: Body-Diode Characteristics Figure 7: On-Resistance vs. Gate-Source Voltage

P- / P-CHANNEL Electrical Characteristic Curve


/ Package Dimensions

PDFN3X3-8L

Unit:mm

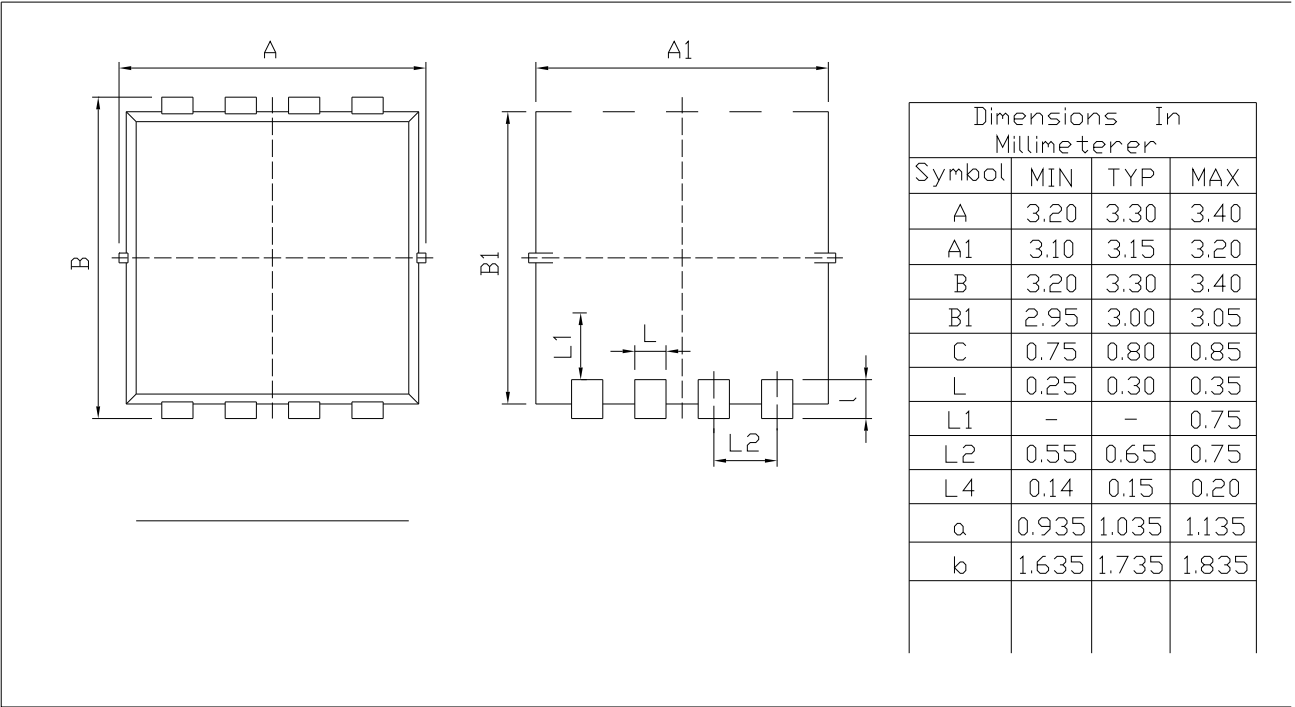

Rev.00 202011


BRCS4614YAQ



DATA SHEET



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

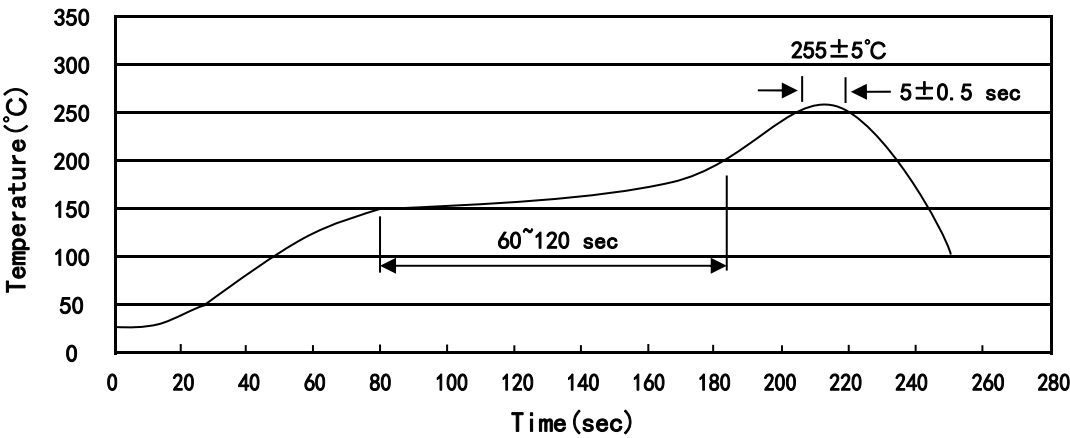

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices