


B	2018-7				
C	2021-10-26		,		





Rev.C Oct.-2021

SOT-363 N MOS

Double N-CHANNEL MOSFET in a SOT-363 Plastic Package.

Sensitive gate trigger current and Low Holding current.ESD protected diode. HF product.




Intended for use in general purpose switching and phase control applications.




PIN1 4 S PIN 2 5 G PIN 3 6 D


See Marking Instructions.



/

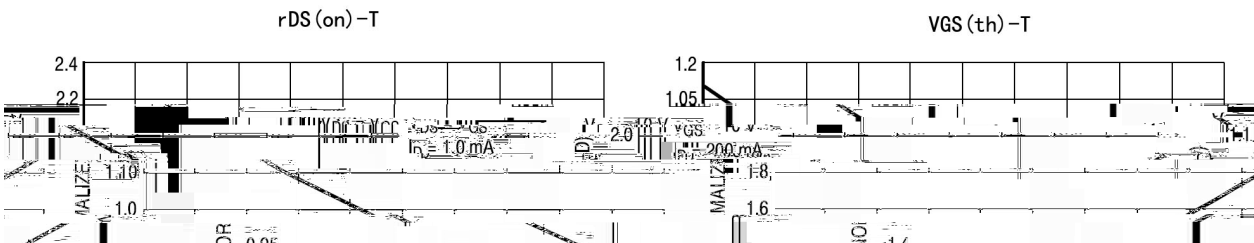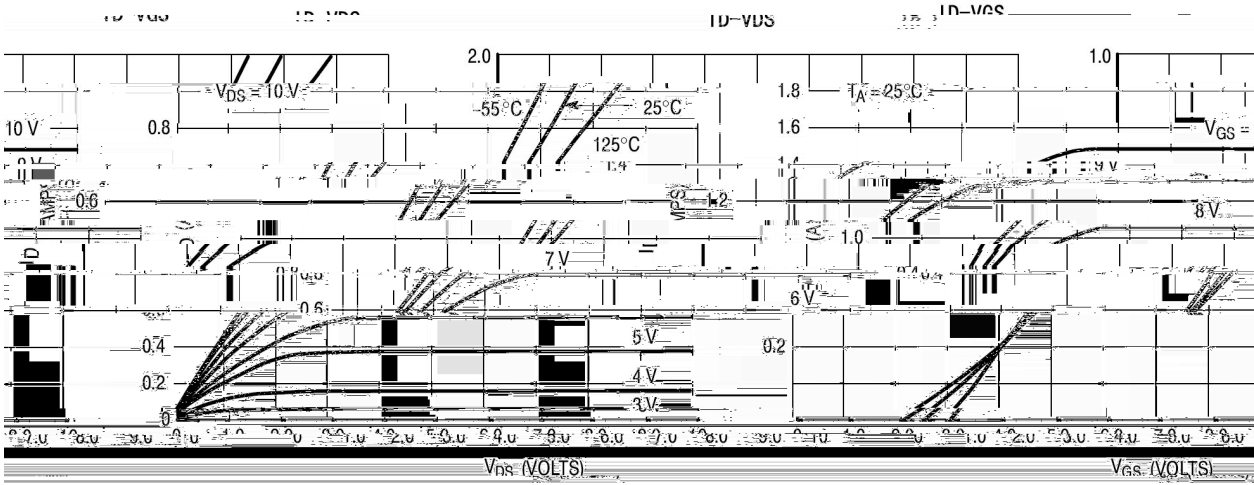



SOT-363-6L

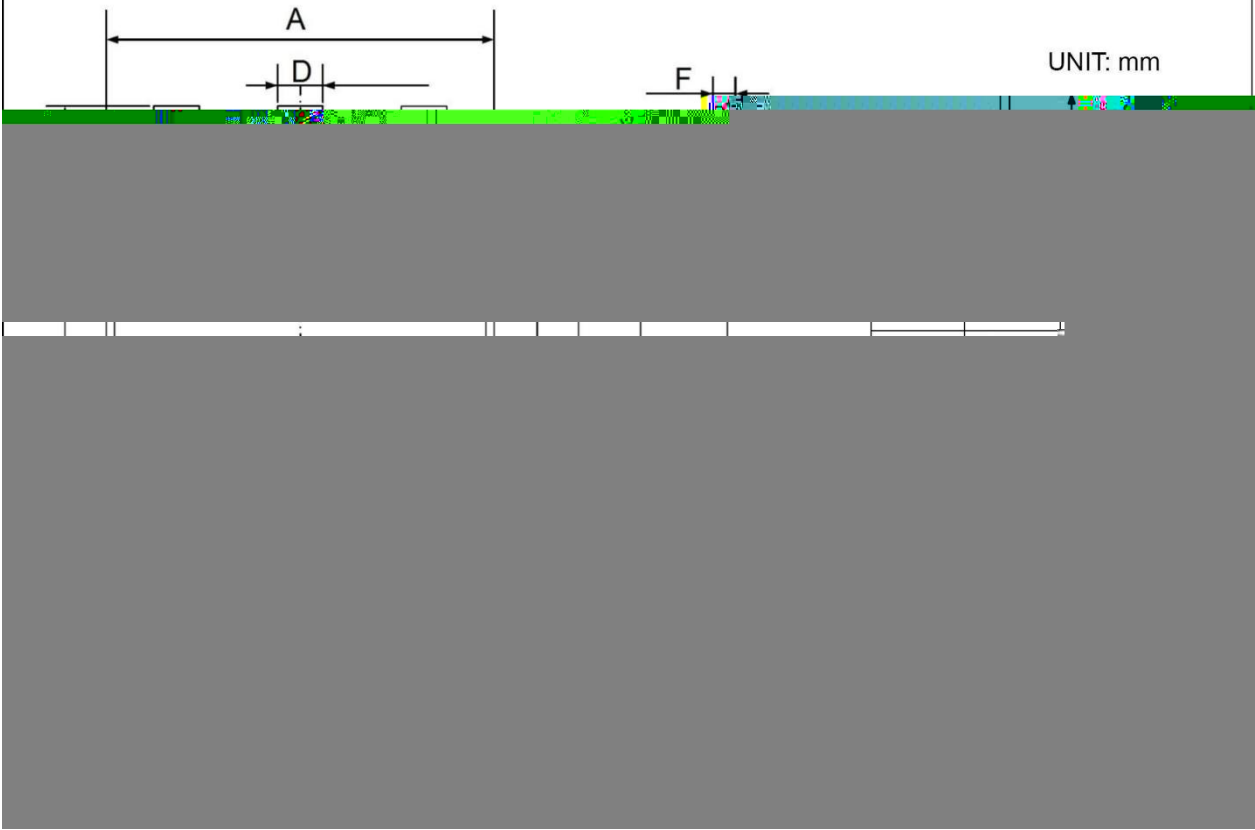

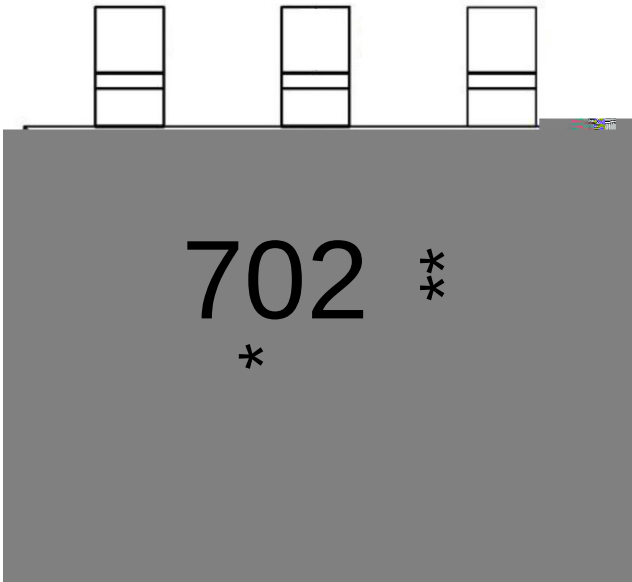

● “ 1 ”

702



***:

Note:

● “ 1 ” Pin

702 Product Type Code

***: Lot No. Code, code change with Lot No.

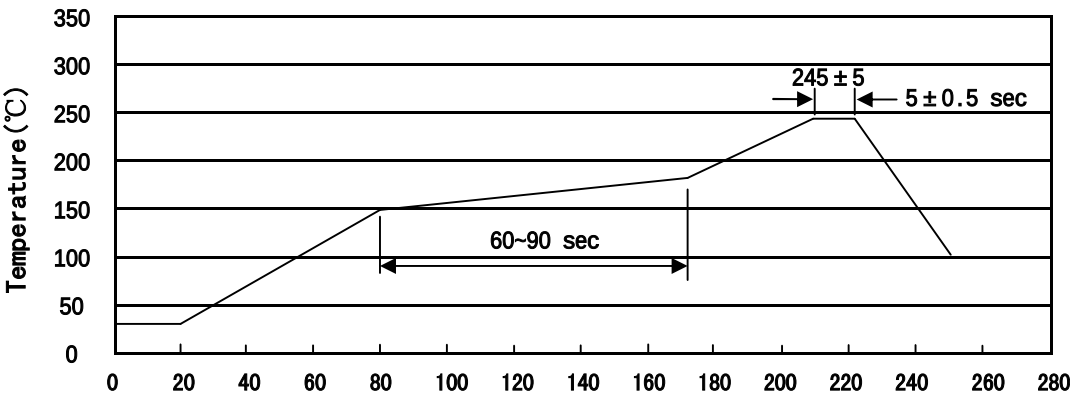

Note:

- | | | | | | |
|---|-------|-----|----|-----------|--|
| 1 | 150 | 180 | 60 | 90sec; | 1.Preheating:150~180°C, Time:60~90sec. |
| 2 | 245±5 | | | 5±0.5sec; | 2.Peak Temp.:245±5°C, Duration:5±0.5sec. |
| 3 | | | 2 | 10°C/sec. | 3. Cooling Speed: 2~10°C/sec. |

260±5°C 10±1 sec. Temp.:260±5°C Time:10±1 sec

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-363	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205