



Rev.A Mar.-2023

SOT-23                      NPN                      Silicon NPN Digital transistor in a SOT-23 Plastic Package.

### AEC-Q101

With built-in bias resistors, simplify circuit design, reduce a quantity of parts and manufacturing process, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

Switching, inverter circuit, interface circuit and driver circuit applications , Meet the stringent requirements of automotive applications.

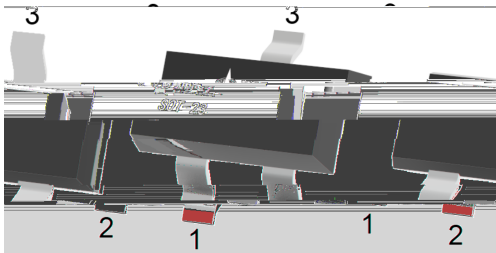


PIN 1    Base                      PIN 2    Emitter                      PIN 3    Collector

|         |      |
|---------|------|
| Marking | QE23 |
|---------|------|

| Parameter                 | Symbol    | Rating  | Unit |
|---------------------------|-----------|---------|------|
| Output Voltage            | $V_{CC}$  | 50      | V    |
| Input Voltage             | $V_{IN}$  | 30      | V    |
|                           |           | -5.0    | V    |
| Output Current            | $I_O$     | 100     | mA   |
|                           | $I_C$     | 100     | mA   |
| Power Dissipation         | $P_C$     | 200     | mW   |
| Junction Temperature      | $T_j$     | 150     |      |
| Storage Temperature Range | $T_{stg}$ | -55 150 |      |


| Parameter              | Symbol       | Test Conditions                         | Min  | Typ | Max  | Unit       |
|------------------------|--------------|-----------------------------------------|------|-----|------|------------|
| Input Voltage(OFF)     | $V_{I(off)}$ | $V_{CC}=5.0V$ $I_O=100\mu A$            |      |     | 0.5  | V          |
| Input Voltage(ON)      | $V_{I(on)}$  | $V_O=0.3V$ $I_O=5.0mA$                  | 1.3  |     |      | V          |
| Output Voltage         | $V_{O(on)}$  | $I_O=5.0mA$ $I_I=0.25mA$                |      | 0.1 | 0.3  | V          |
| Input Current          | $I_I$        | $V_I=5.0V$                              |      |     | 1.8  | mA         |
| Output Cut-off Current | $I_{O(off)}$ | $V_{CC}=50V$ $V_I=0V$                   |      |     | 0.5  | $\mu A$    |
| DC Current Gain        | $G_I$        | $V_O=5.0V$ $I_O=10mA$                   | 80   |     |      |            |
| Transition Frequency   | $f_T$        | $V_{CE}=10V$ $I_E=-5.0mA$<br>$f=100MHz$ |      | 250 |      | MHz        |
| Resistance1            | $R_1$        |                                         | 3.29 | 4.7 | 6.11 | K $\Omega$ |
| Resistance Ratio       | $R_2/R_1$    |                                         | 8.0  | 10  | 12   |            |

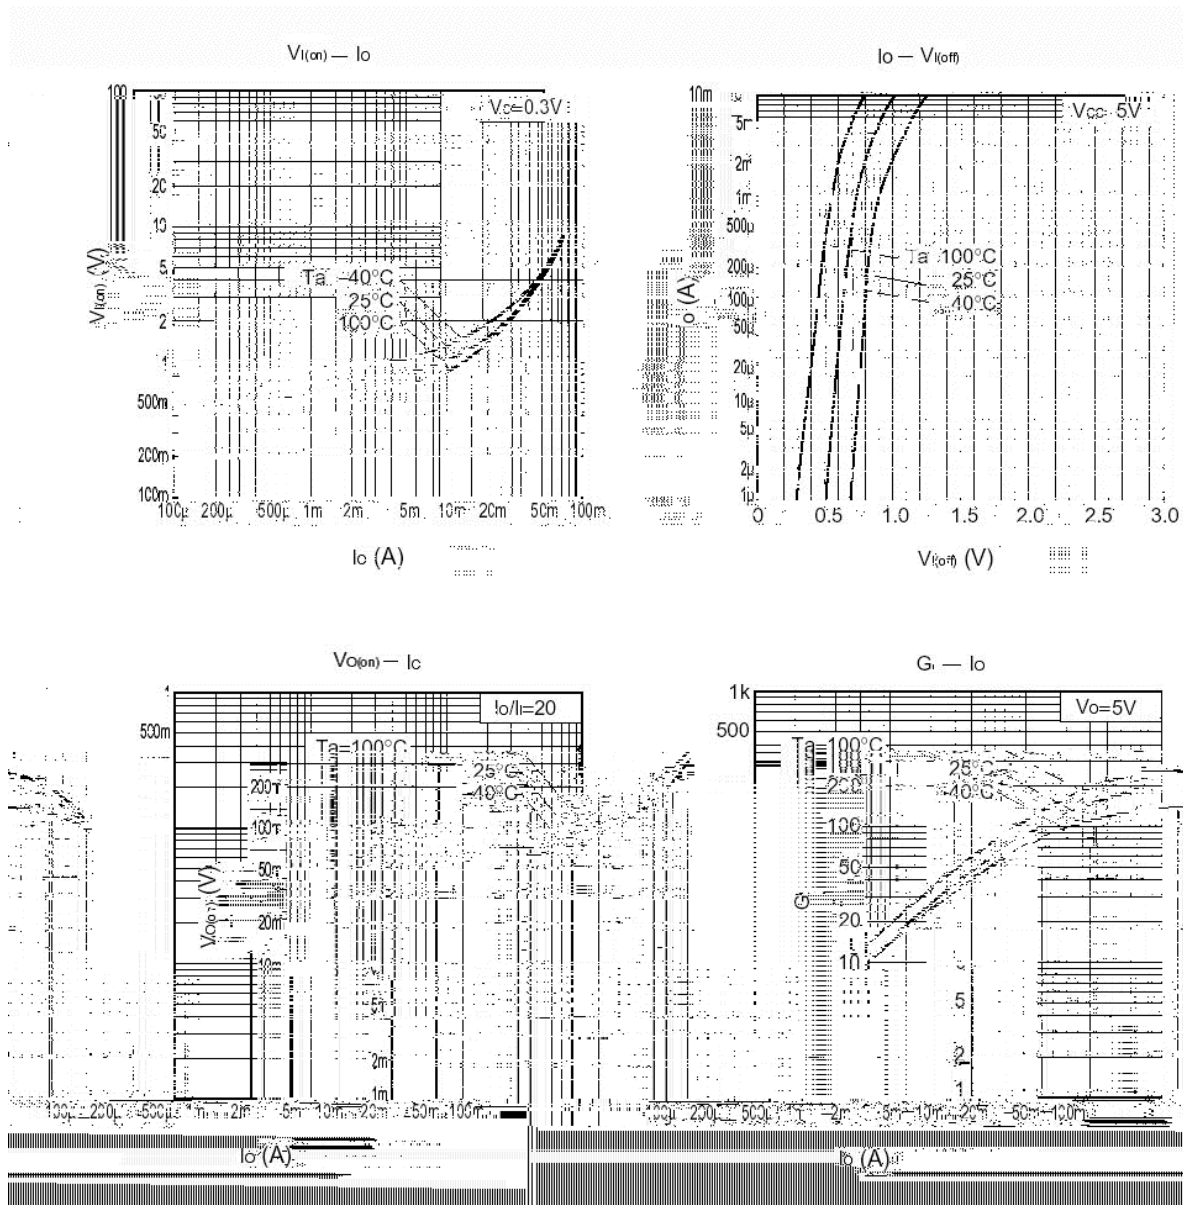

Rev.A Mar.-2023

SOT-23

单位: mm

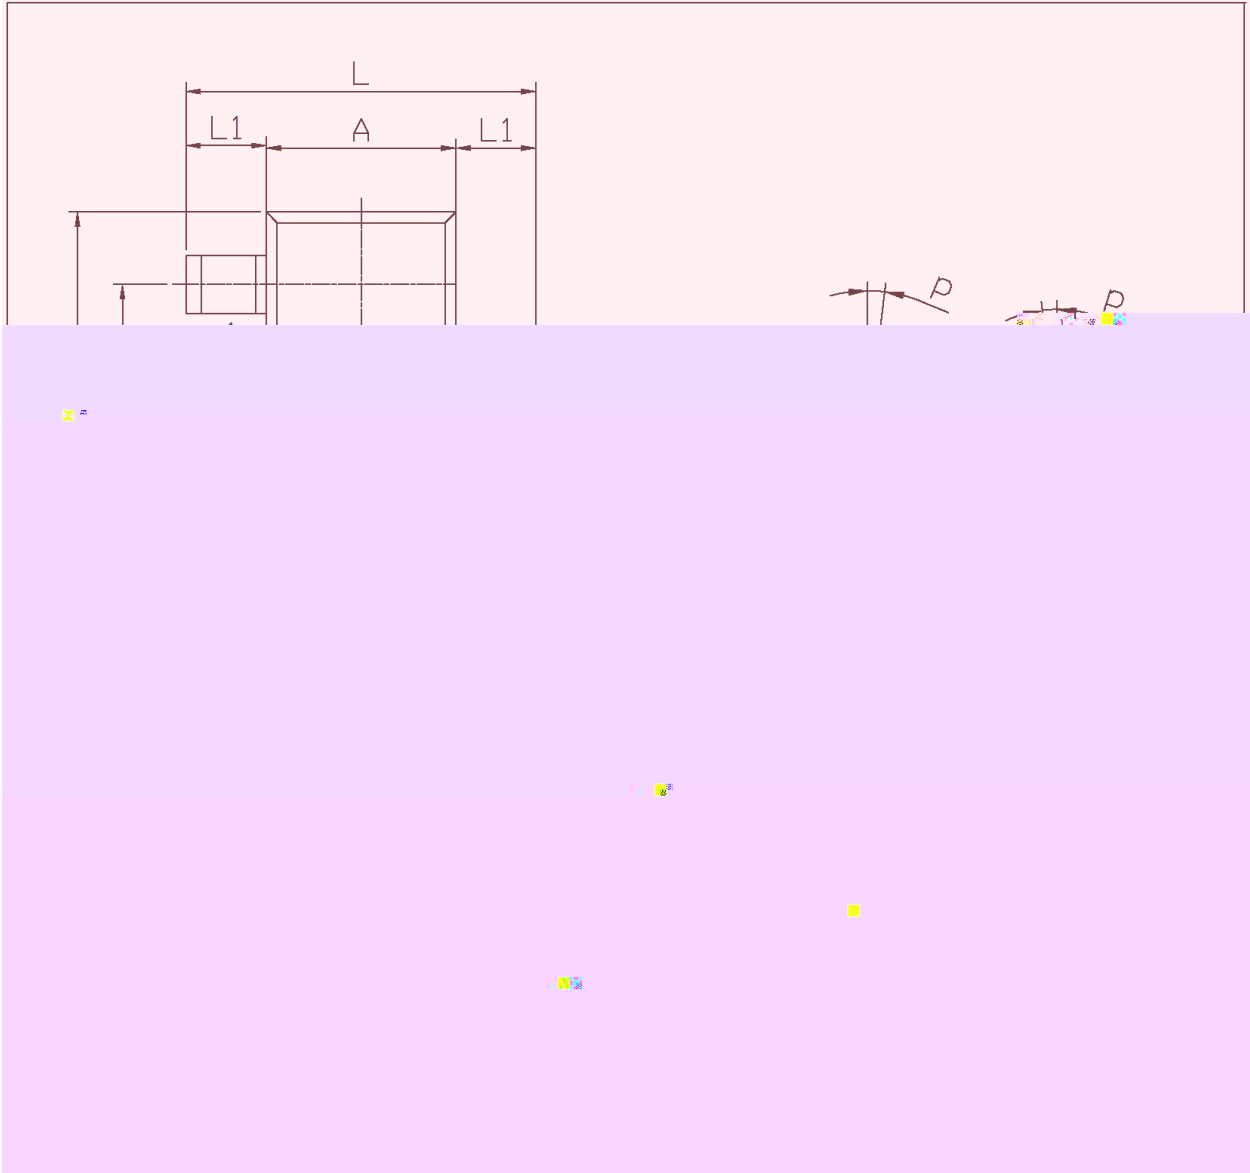



Q

E23

Note:

Q: Automobile halogen-free product Code

E23 Product Type Code



Temperature Profile for IR Reflow Soldering(Pb-Free)

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |

Note:

- 1

150 200

60 120sec;

1.Preheating:150~200 , Time:60~120sec.
- 2

255±5

5±0.5sec;

2.Peak Temp.:255±5 , Duration:5±0.5sec.
- 3

2 10

/sec.

3.Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

| Package Type | Units           |                      |                      |                            |                      | Dimension (unit mm <sup>3</sup> ) |             |             |
|--------------|-----------------|----------------------|----------------------|----------------------------|----------------------|-----------------------------------|-------------|-------------|
|              | Units/Reel<br>/ | Reels/Inner Box<br>/ | Units/Inner Box<br>/ | Inner Boxes/Outer Box<br>/ | Units/Outer Box<br>/ | Reel                              | Inner Box   | Outer Box   |
| SOT-23       | 3,000           | 10                   | 30,000               | 6                          | 180,000              | 7 ×8                              | 180×120×180 | 390×385×205 |