

DFN1006-2L ESD
DFN1006-2L Plastic Package 1-Line,Bi-directional , ESD Protection Diode.

Stand-off voltage: $\pm 12\text{V}$ Max.

Transient protection for each line according to

IEC61000-4-2(ESD): $\pm 30\text{kV}$ (contact)

IEC61000-4-4 (EFT): 40A (5/50ns)

IEC61000-4-5(surge): 6A (8/20 μs)

Ultra-low capacitance: $C_J = 5\text{pF}$ typ.

Low leakage current:

Low clamping voltage: $V_{CL} = 21.0\text{V}$ typ. @ $I_{PP} = 16\text{A}$ (TLP)

Solid-state silicon technology


HF Product

Computers and peripherals

Audio and video equipment


Communication systems

Portable electronics

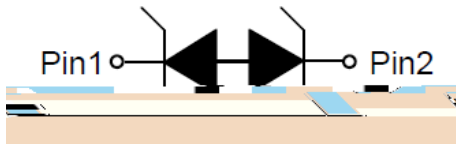

See Marking Instructions.

Parameter	Symbol	Rating	Unit
Peak Pulse Power($t_p = 8/20\mu s$)	P_{PK}	120	W
Peak Pulse Current($t_p = 8/20\mu s$)	I_{PP}	6	A
ESD according to IEC61000-4-2 air discharge	V_{ESD}	± 30	KV
ESD according to IEC61000-4-2 contact discharge		± 30	
Junction temperature	T_J	125	
Operating temperature	T_{OP}	-40~85	
Lead temperature	T_L	260	
Storage Temperature	T_{STG}	-55~+150	

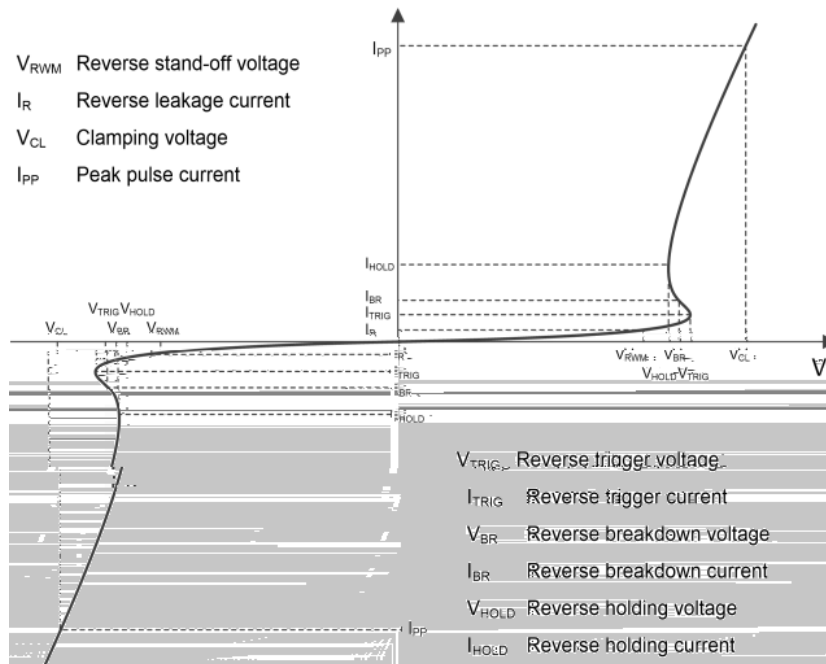




Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Reverse maximum working voltage	V_{RWM}				± 12	V
Reverse leakage current	I_R	$V_{RWM} = 12V$			100	nA
Reverse breakdown voltage	V_{BR}	$I_{BR}=1mA$	13	14		V
Reverse holding voltage	V_{HOLD}	$I_{HOLD}=50mA$	13	14		V
Clamping voltage ¹⁾	V_{CL}	$I_{PP}=16A \quad t_p=100ns$		21.0		V
Dynamic resistance ¹⁾	R_{DYN}			0.35		Ω
Clamping voltage ²⁾	V_{CL}	$V_{ESD}= 8kV$		21.0		V
Clamping voltage ³⁾	V_{CL}	$I_{PP} = 1A \quad t_p = 8/20\mu s$		19	25	V
		$I_{PP} = 6A \quad t_p = 8/20\mu s$		28.5	30	V
Junction Capacitance	C_J	$V_R = 0V \quad f = 1MHz$		9	11	pF
	C_J	$V_R = 2.5V \quad f = 1MHz$		8	10	pF


Notes:

1) TLP parameter: $Z_0 = 50\Omega$, $t_p = 100ns$, $t_r = 2ns$, averaging window from 60ns to 80ns. R_{DYN} is calculated from 4A to 16A.

2) Contact discharge mode, according to IEC61000-4-2.


3) Non-repetitive current pulse, according to IEC61000-4-5.

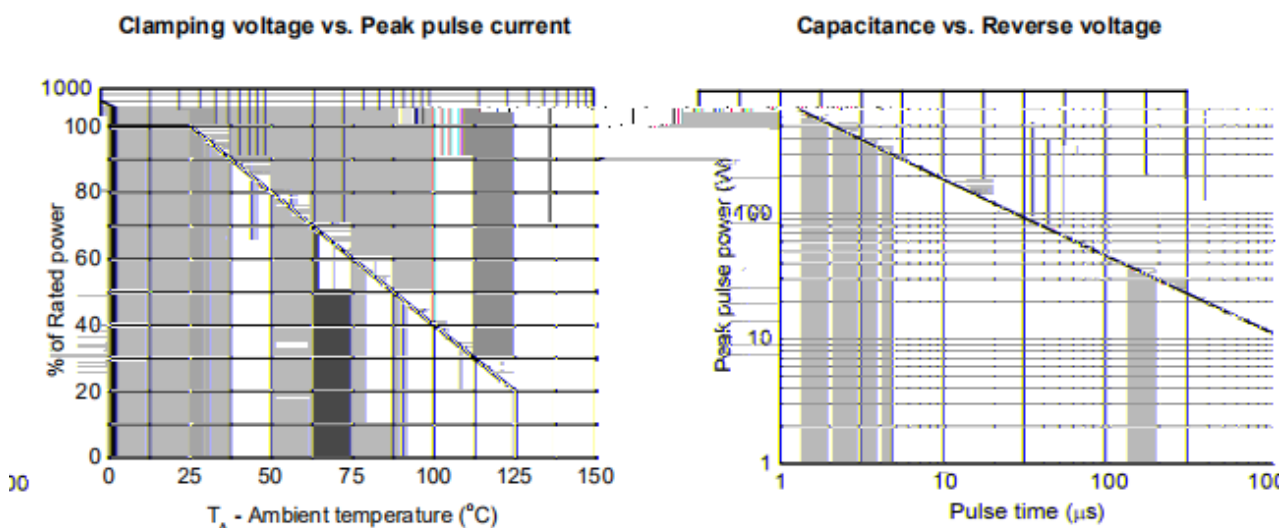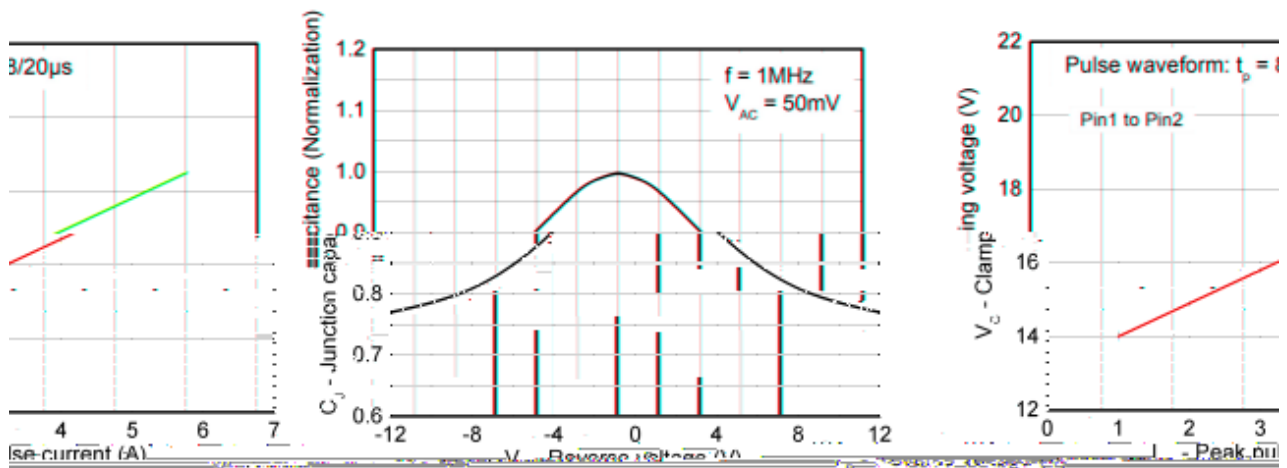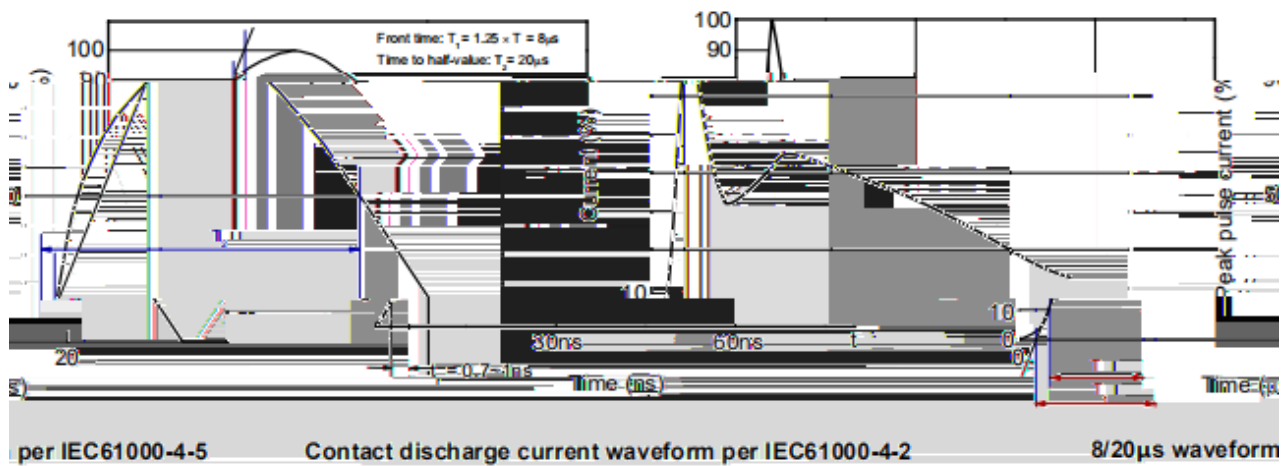

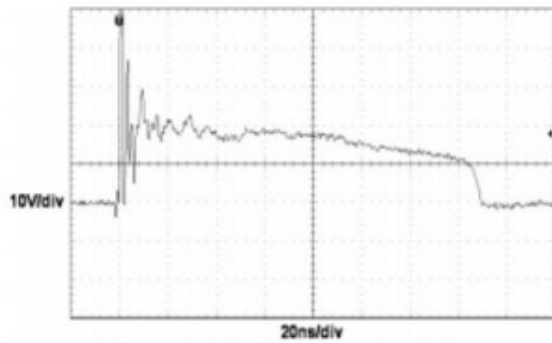


ESD clamping

(+8kV contact discharge per IEC 61000-4-2)

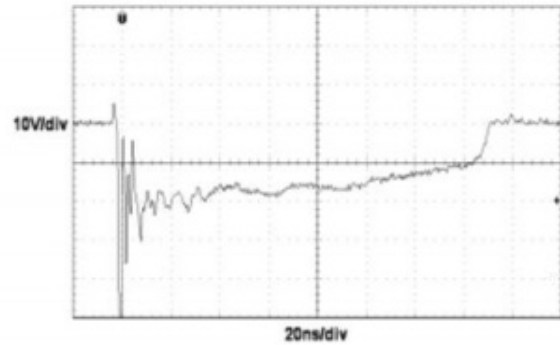


ESD clamping


(-8kV contact discharge per IEC 61000-4-2)

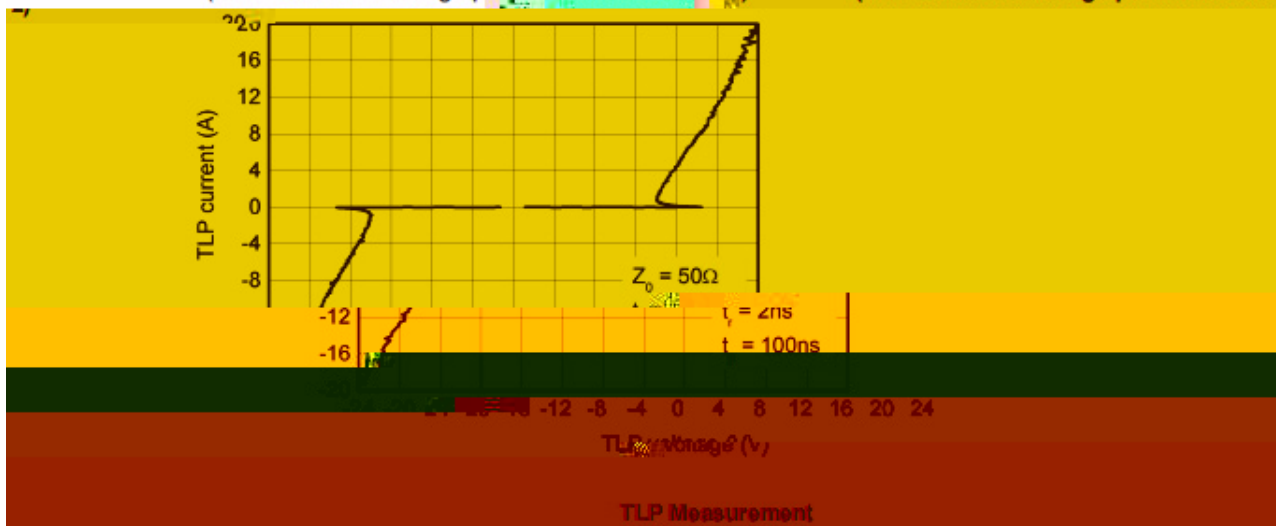

DFN1006-2L

Unit:mm

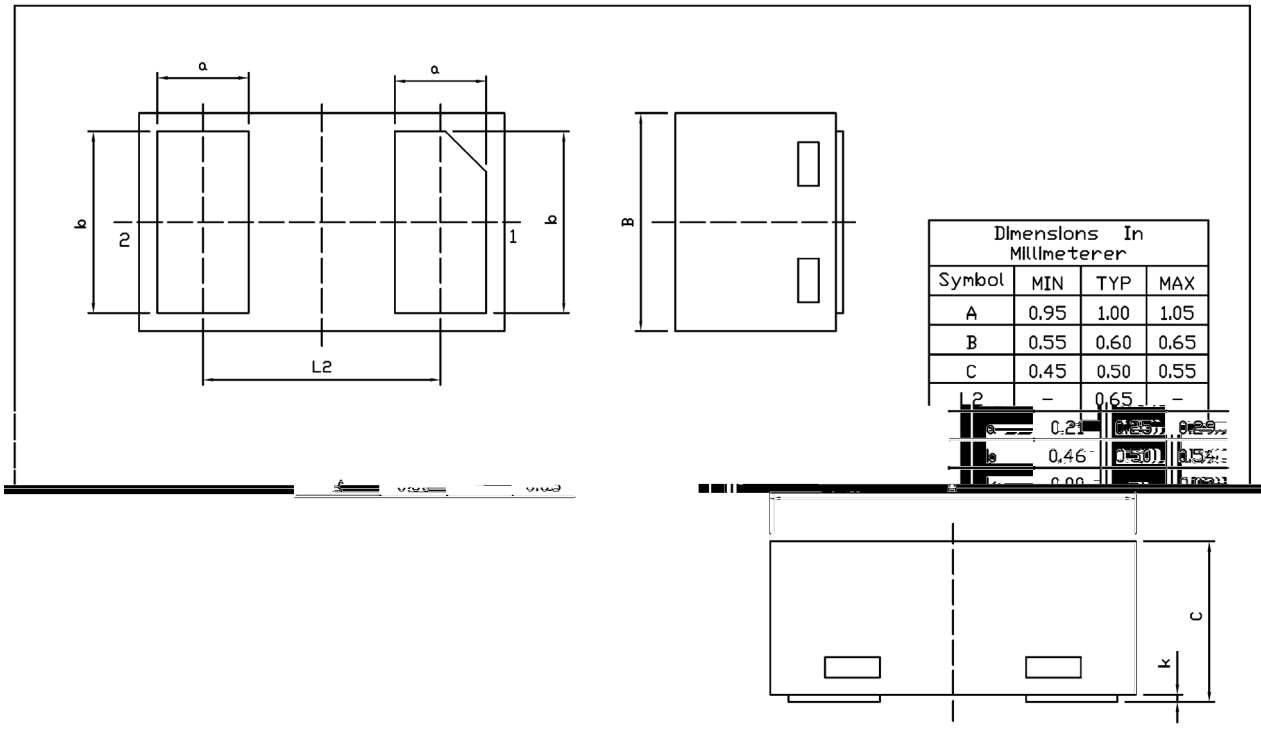


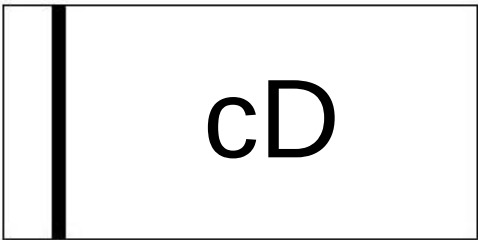


cD

Note

cD Product Type Code



Temperature Profile for IR Reflow Soldering(Pb-Free)

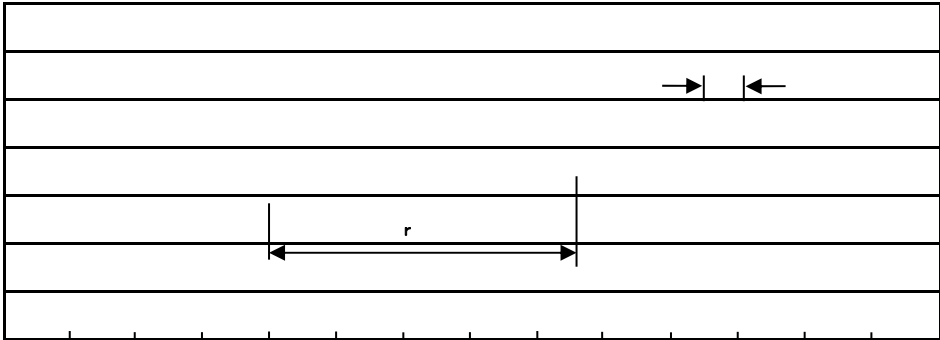

Note:

- 1

150 180

60 90sec;

1.Preheating:150~180 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10

/sec.

3. Cooling Speed: 2~10 /sec.

260±5

10±1 sec.

Temp.:260±5

Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
DFN1006-2L	10,000	10	100,000	6	600,000	7 ×8	180×120×180	390×385×205