


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit

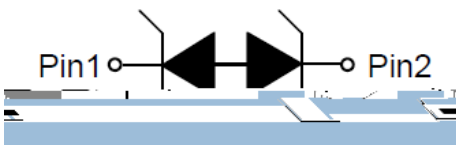

/ Pinning




/ Marking

		±	
		±	

Definitions of electrical characteristics


--	--	--	--	--	--	--

/ Electrical Characteristic Curve(Ta=25)

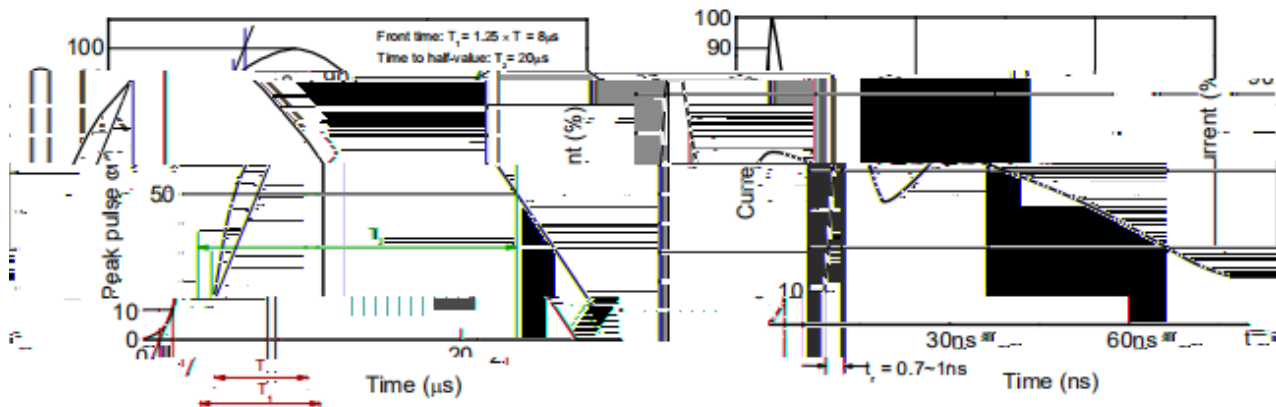

00-4-2 8/20μs waveform per IEC61000-4-5


Contact discharge current waveform per IEC610

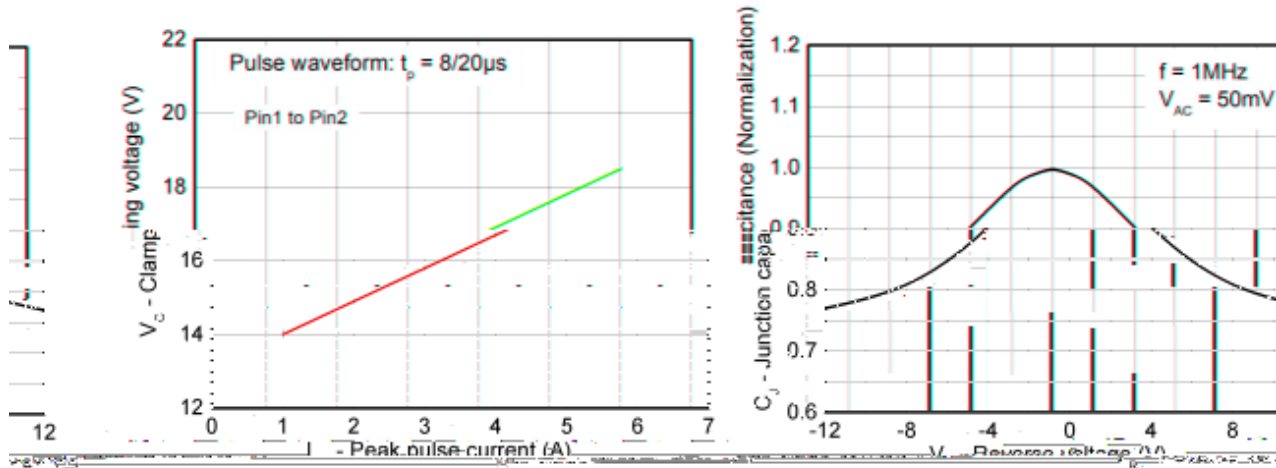


Reverse voltage

Clamping voltage vs. Peak pulse current

Capacitance vs. R

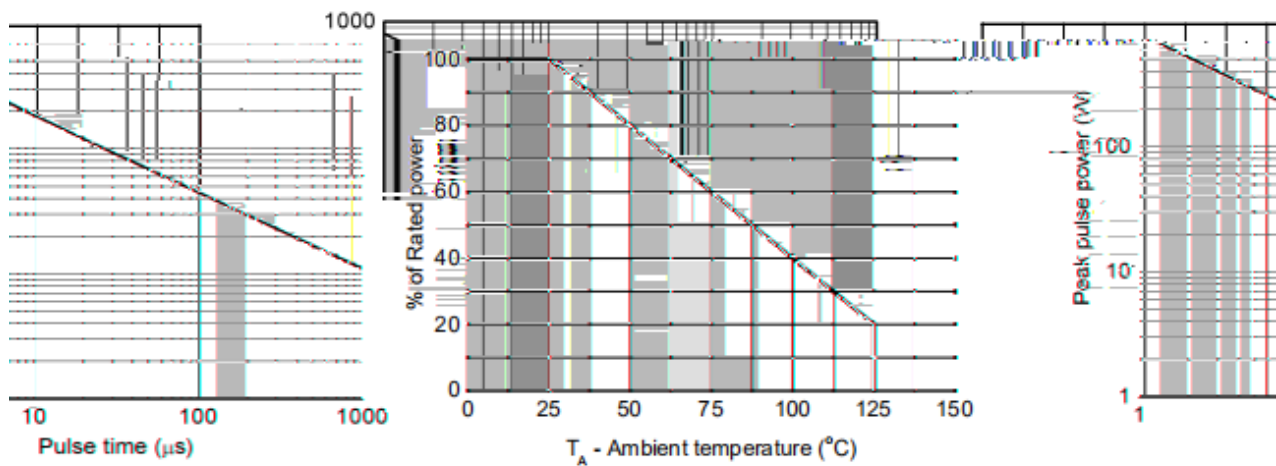


/ Electrical Characteristic Curve(Ta=25)

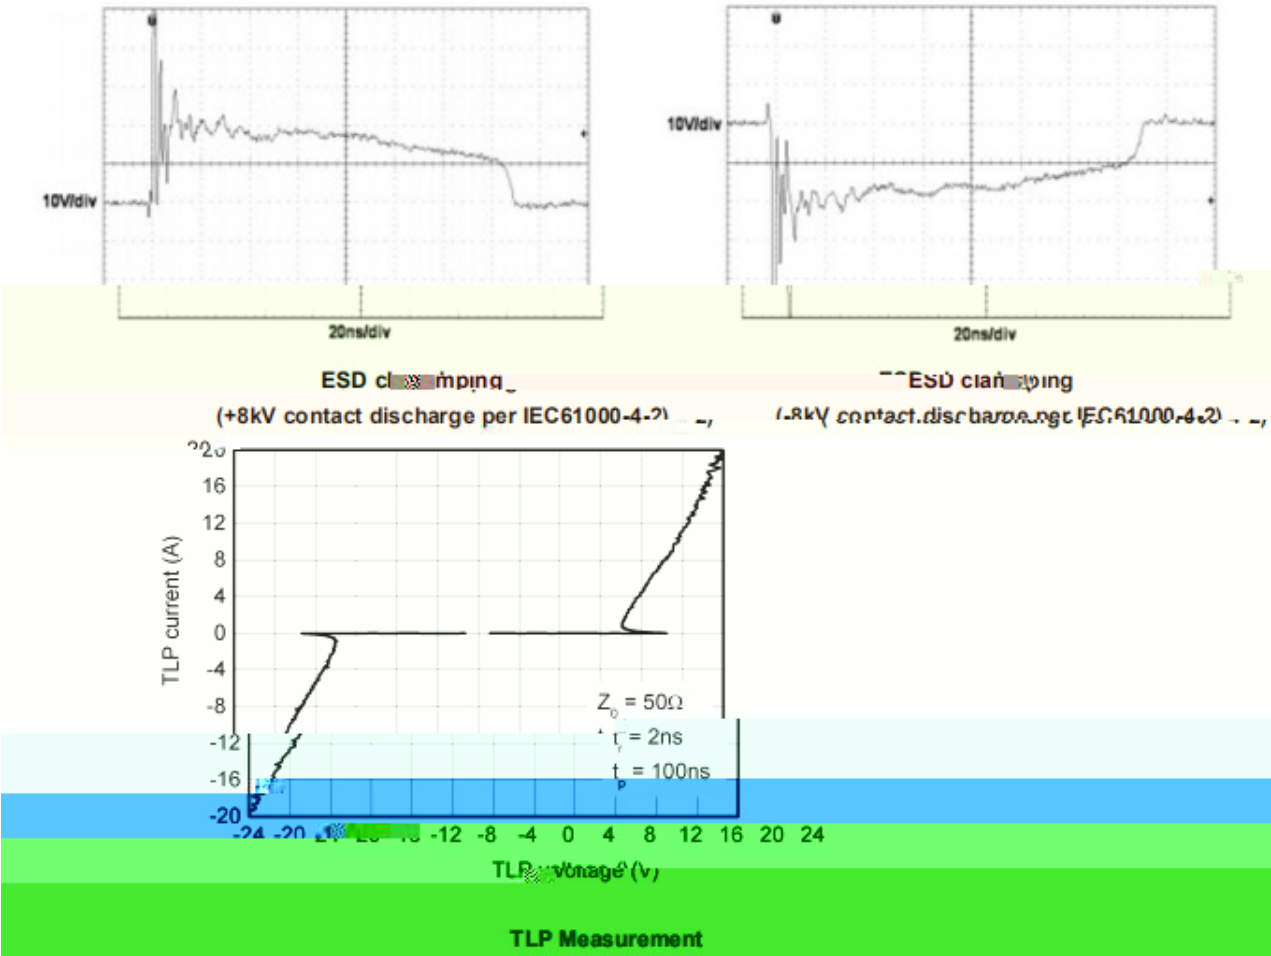

/ Package Dimensions

DFN1006-2L

Unit:mm

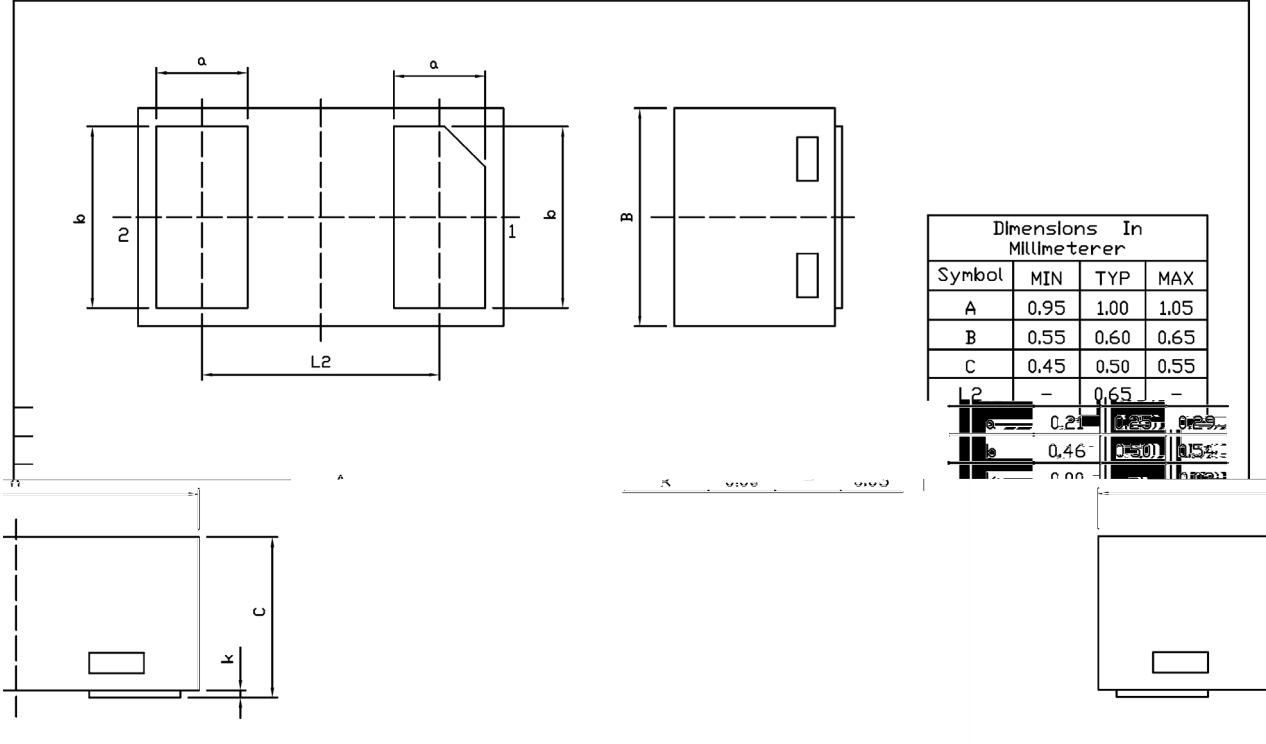


REVISED ESD-100

Rev.01 202109

/ Marking Instructions



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

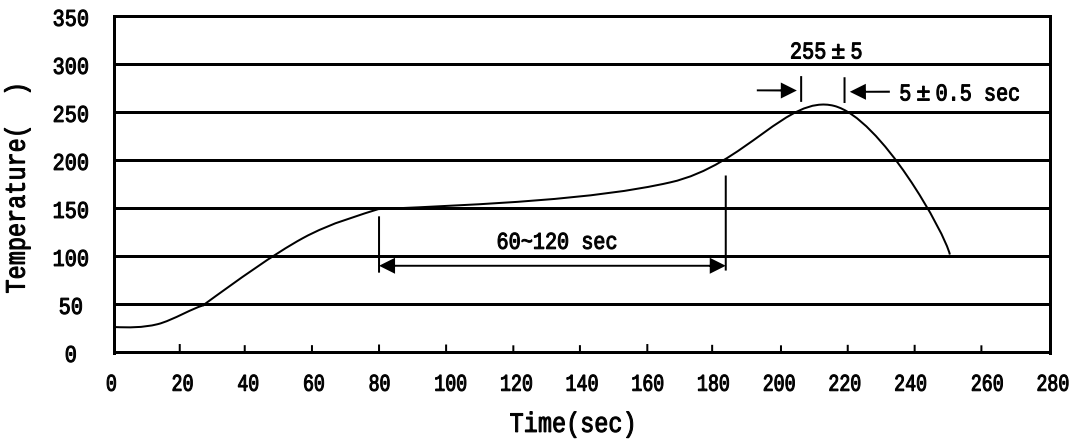

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices