

DFN0603 ESD

 μ

/ Applications

1 8




BRES3V3L1B2ZAQ

Definitions of electrical characteristics


						Ω

μ


/ Electrical Characteristic Curve($T_a=25^\circ\text{C}$)

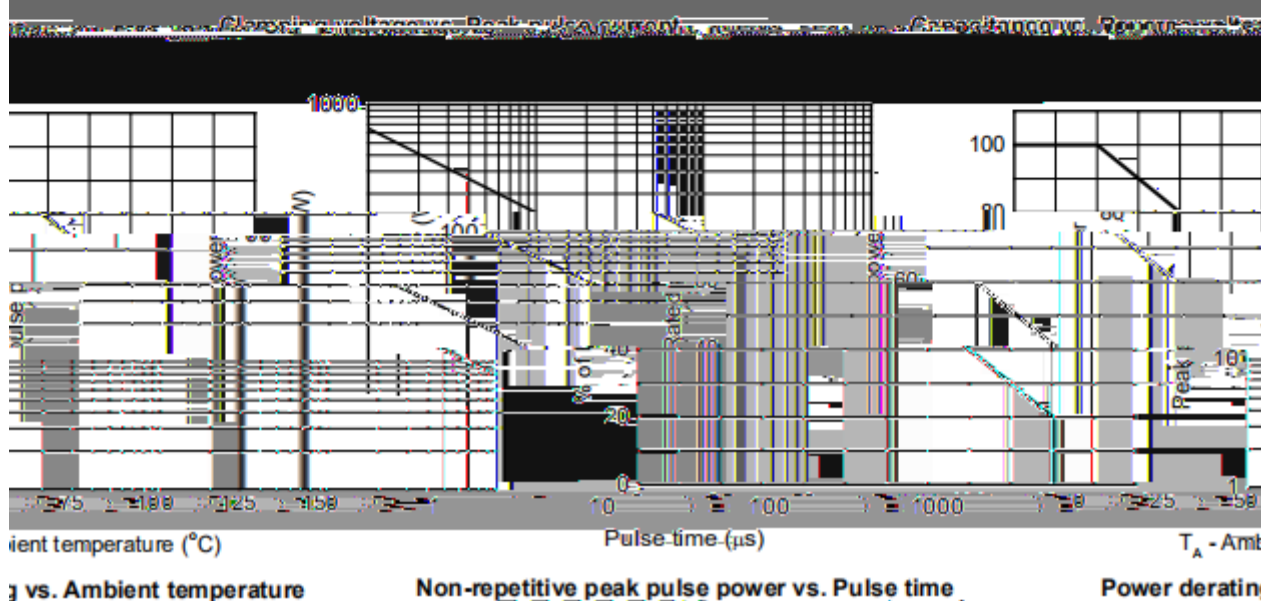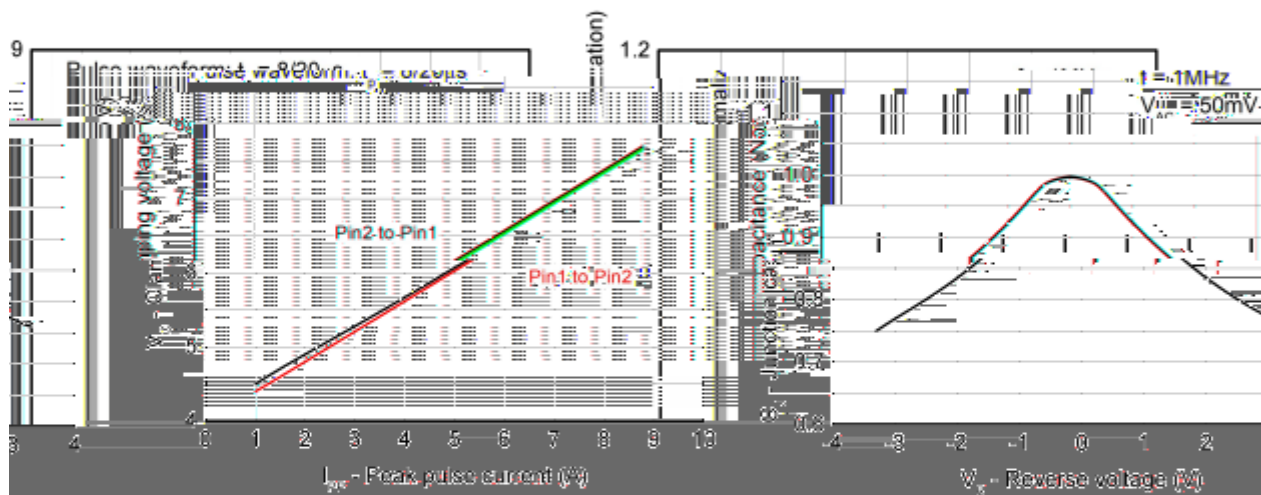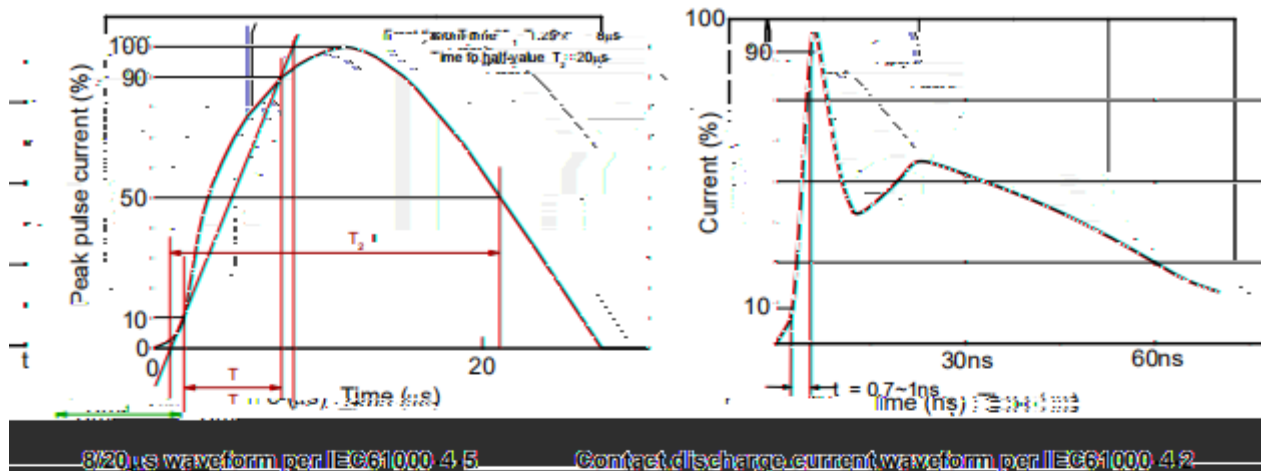

/ Electrical Characteristic Curve(Ta=25)

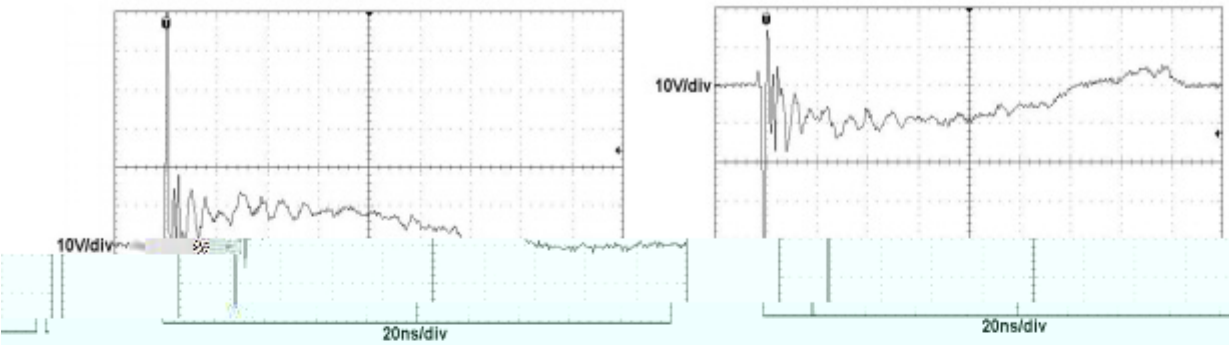

FSD clamping, (+8kV contact discharge per IEC61000-4-2) FSD clamping, (-8kV contact discharge per IEC61000-4-2)

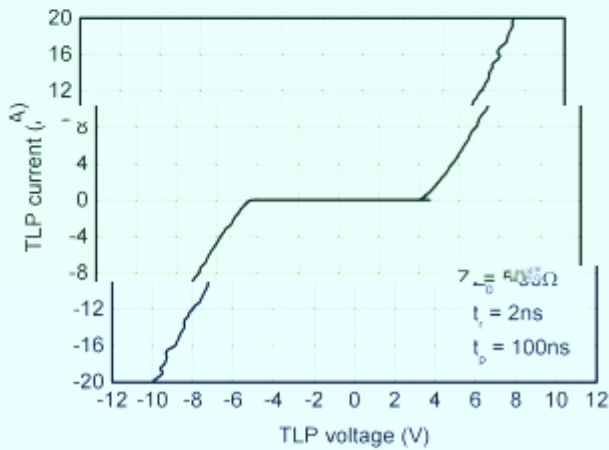


TLP Measurement

/ Package Dimensions

DFN0603

Unit:mm

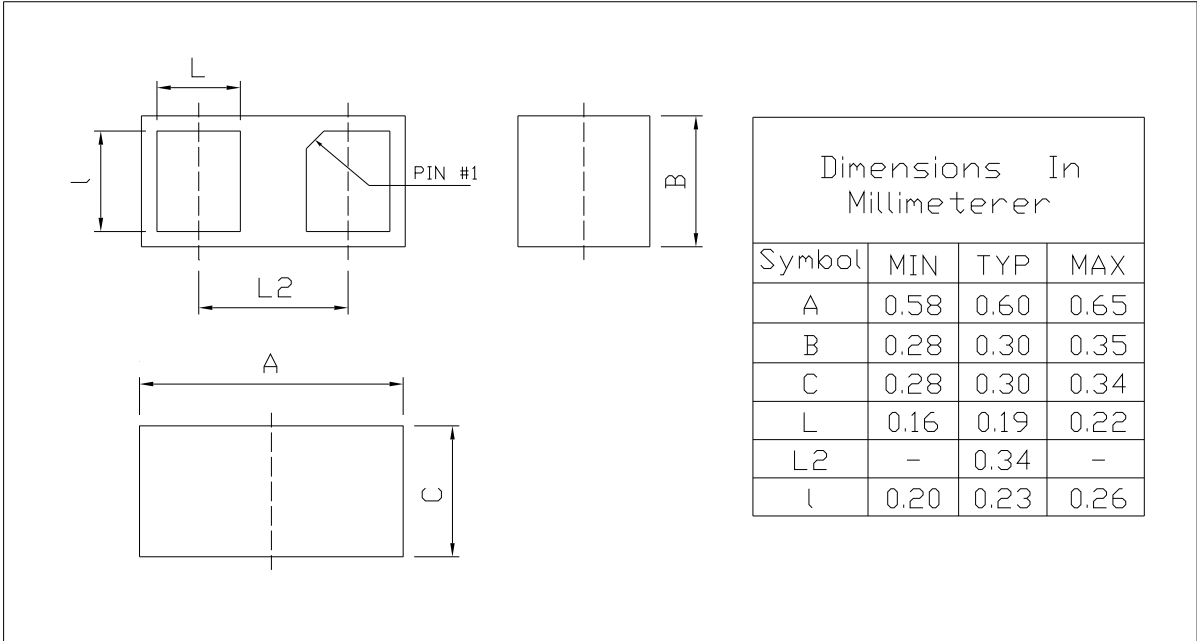

Rev.02 202102

BRES3V3L1B2ZAQ

() / Temperature Profile for IR Reflow Soldering(Pb-Free)
