

ESD


/ Features

ESD


/ Applications

MP3

/ Equivalent Circuit

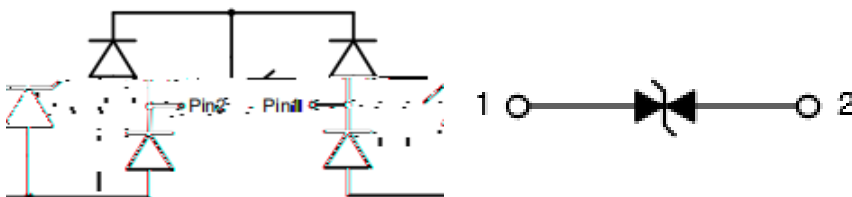




/ Pinning

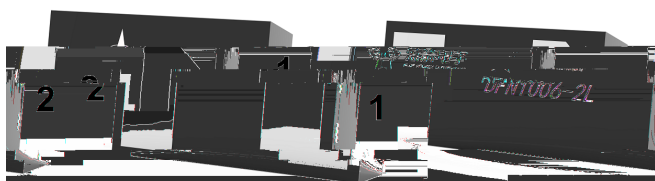/ **Marking**


μ			
μ			
		$\pm$	
		$\pm$	

Definitions of electrical characteristics

/ Electrical Characteristic Curve($T_a=25^\circ\text{C}$)

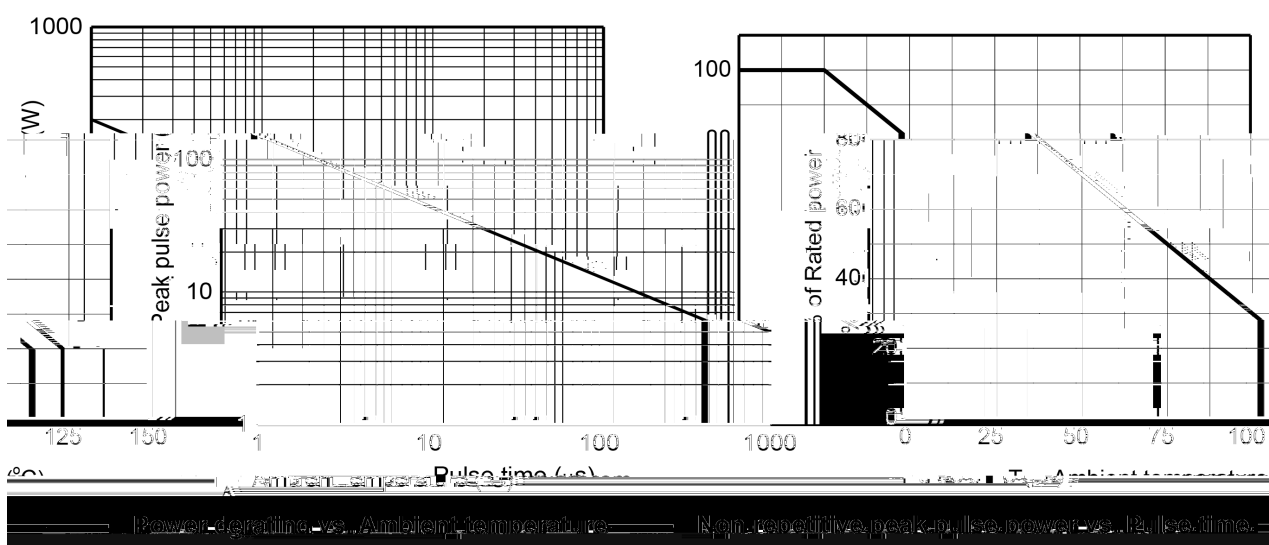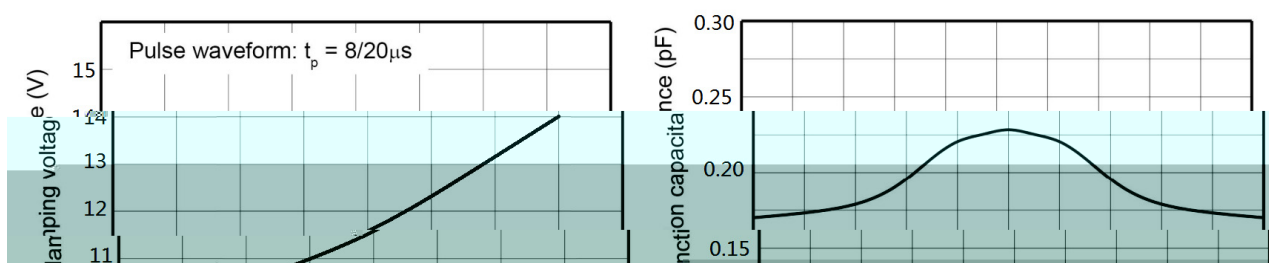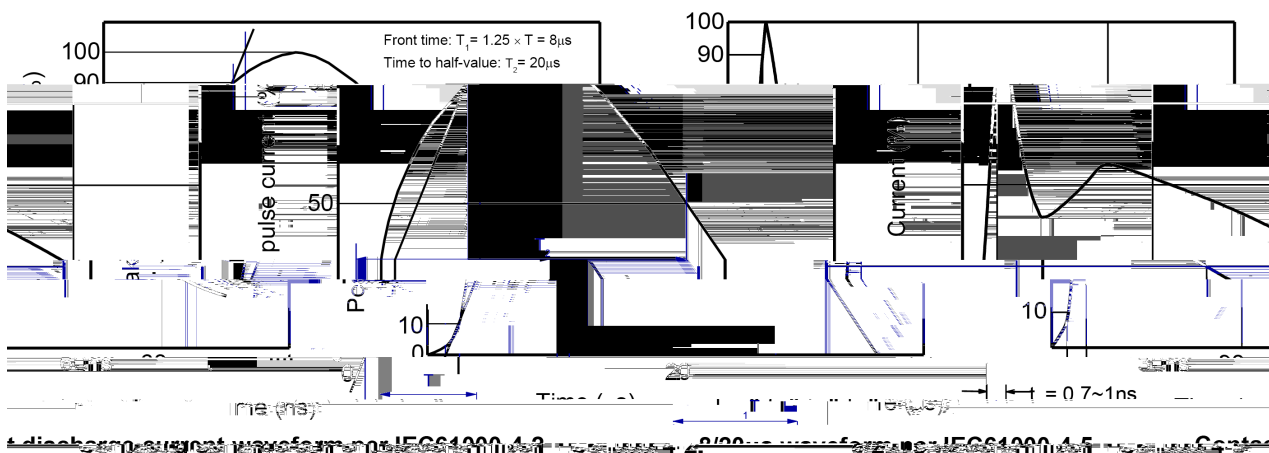


/ Electrical Characteristic Curve($T_a=25^\circ\text{C}$)

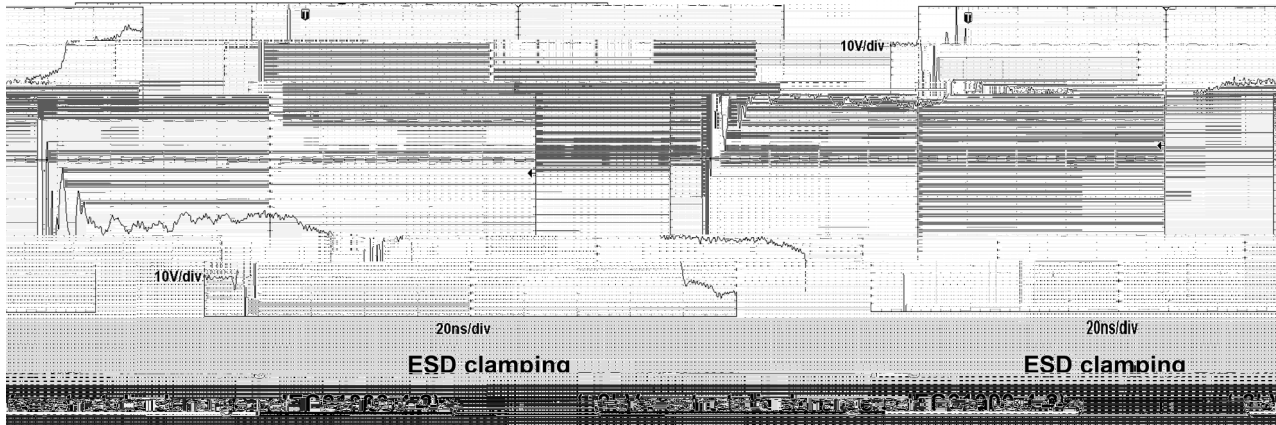

/ Package Dimensions

DFN1006-2L

Unit:mm

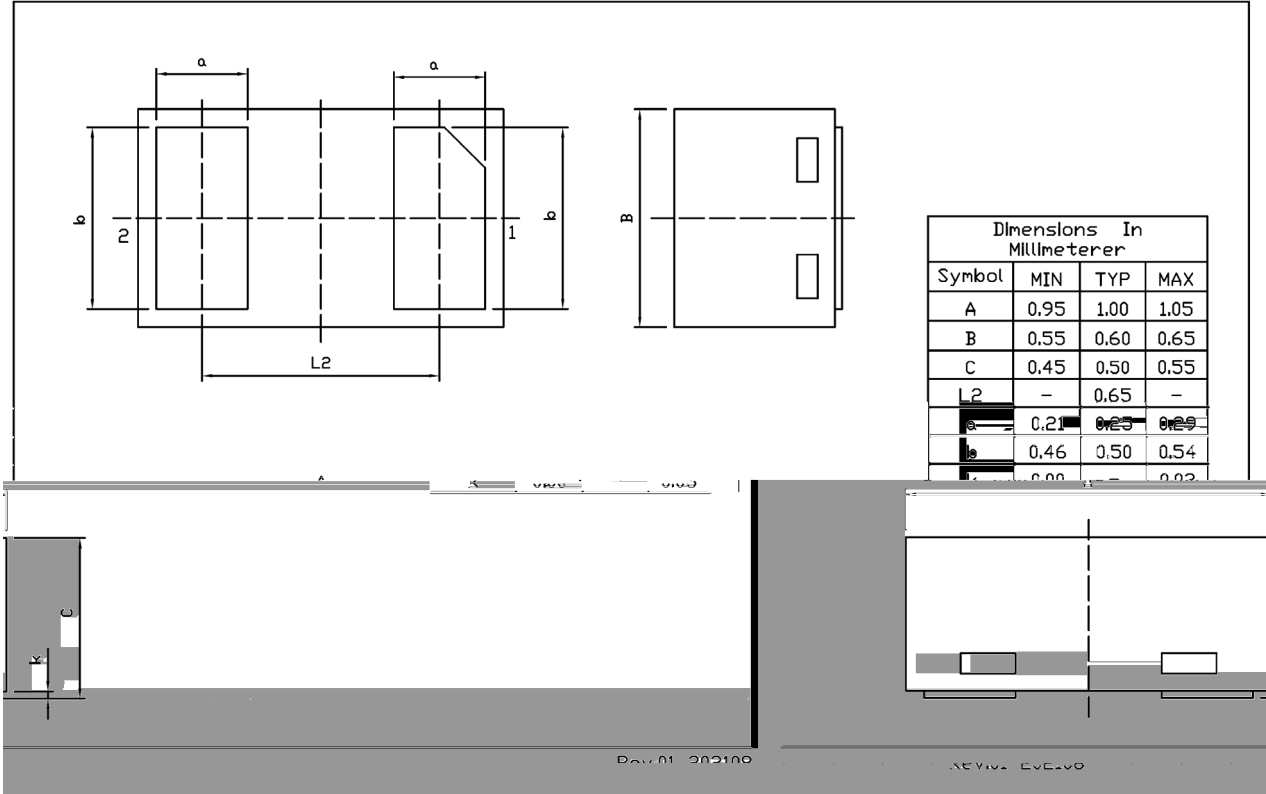


/ Marking Instructions



5U

() /

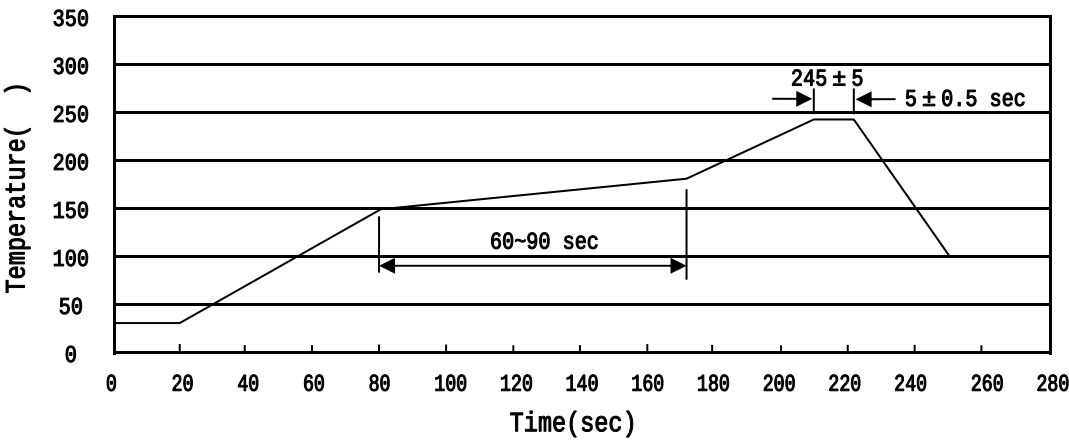

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱

/ Notices