


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit

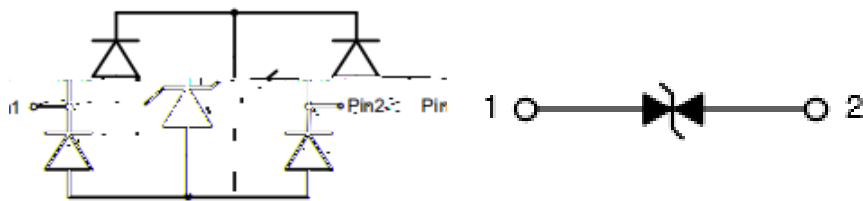

/ Pinning



/ Marking




BRES5V0X1C2ZP



DATA SHEET


		±	

/ Electrical Characteristic Curve($T_a=25^\circ\text{C}$)

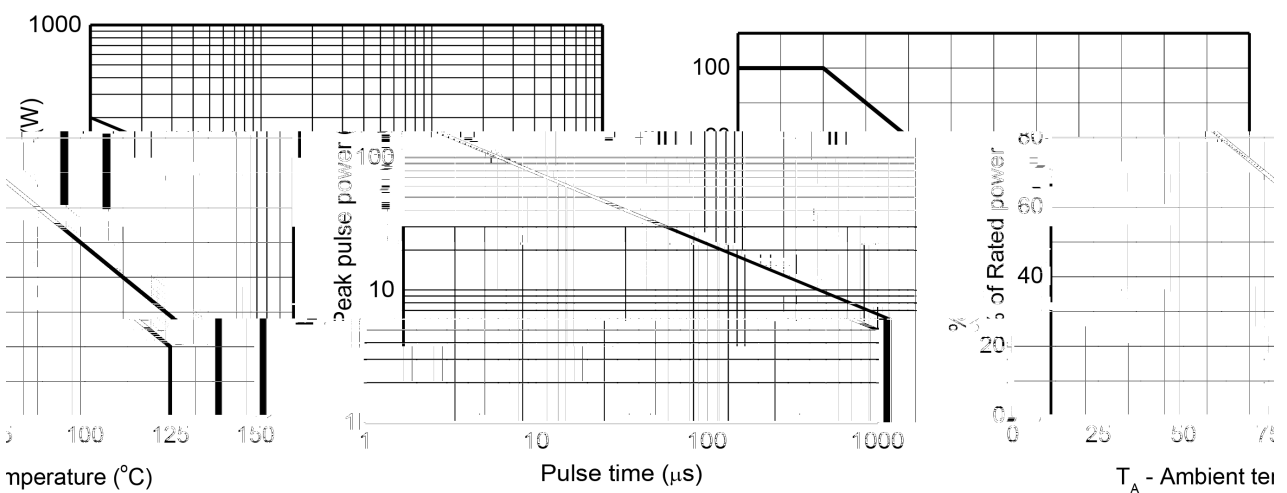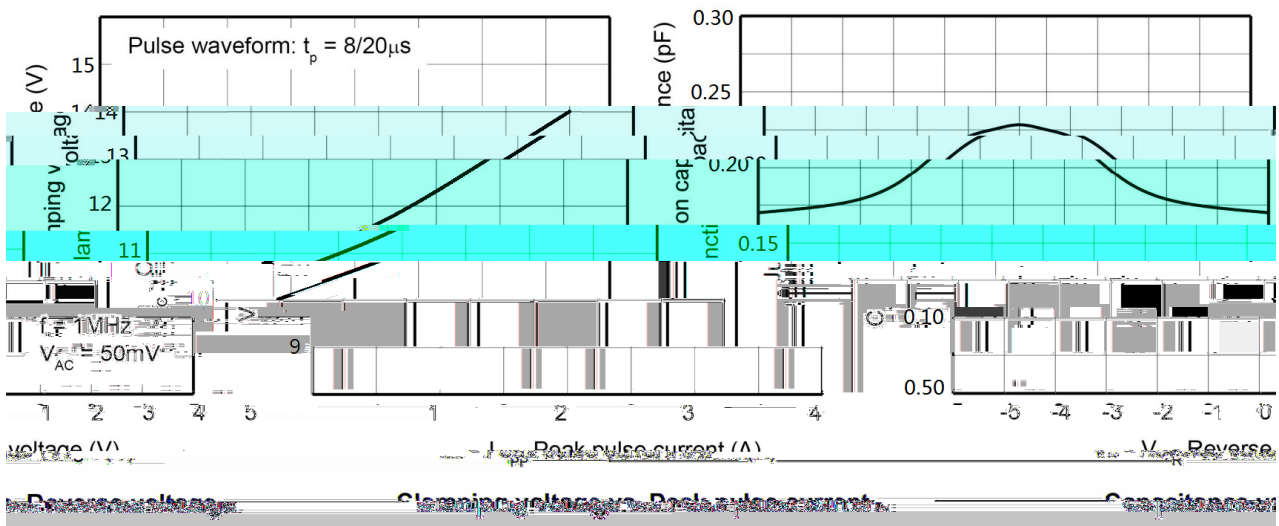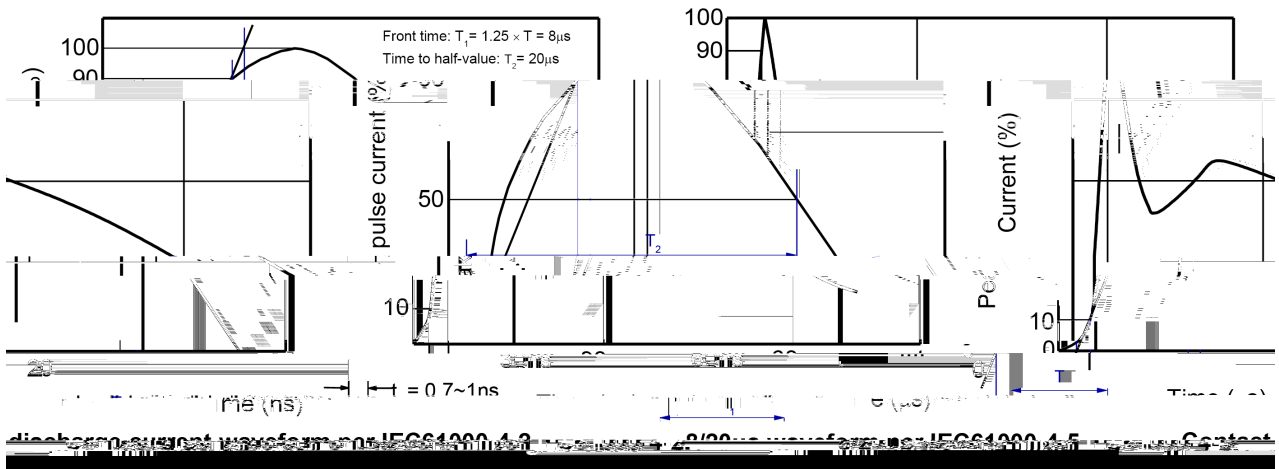

Ambient temperature Non-repetitive peak pulse power vs. Pulse time Power derating vs. Ambient temperature


/ Electrical Characteristic Curve(Ta=25)

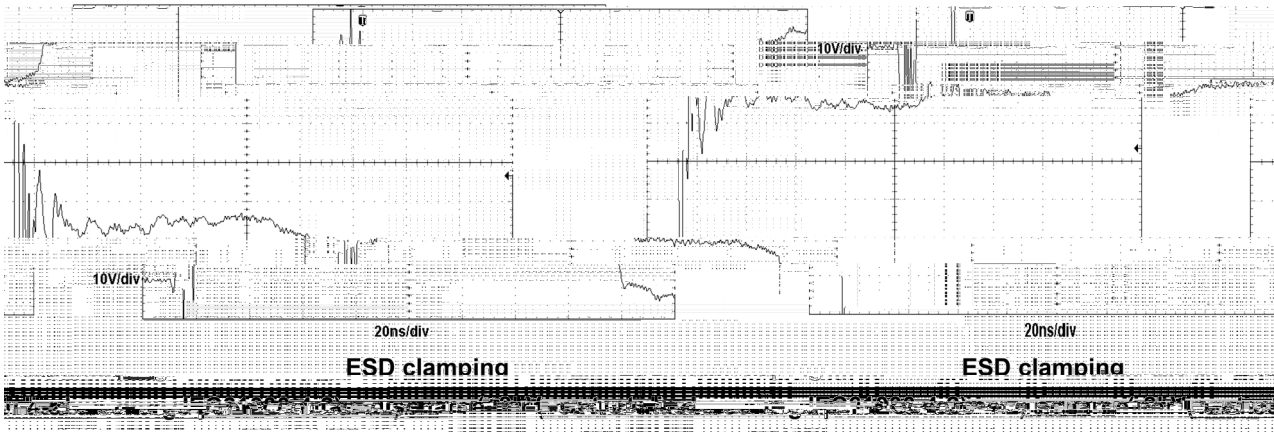

/ Package Dimensions

DFN1006-2L


Unit:mm

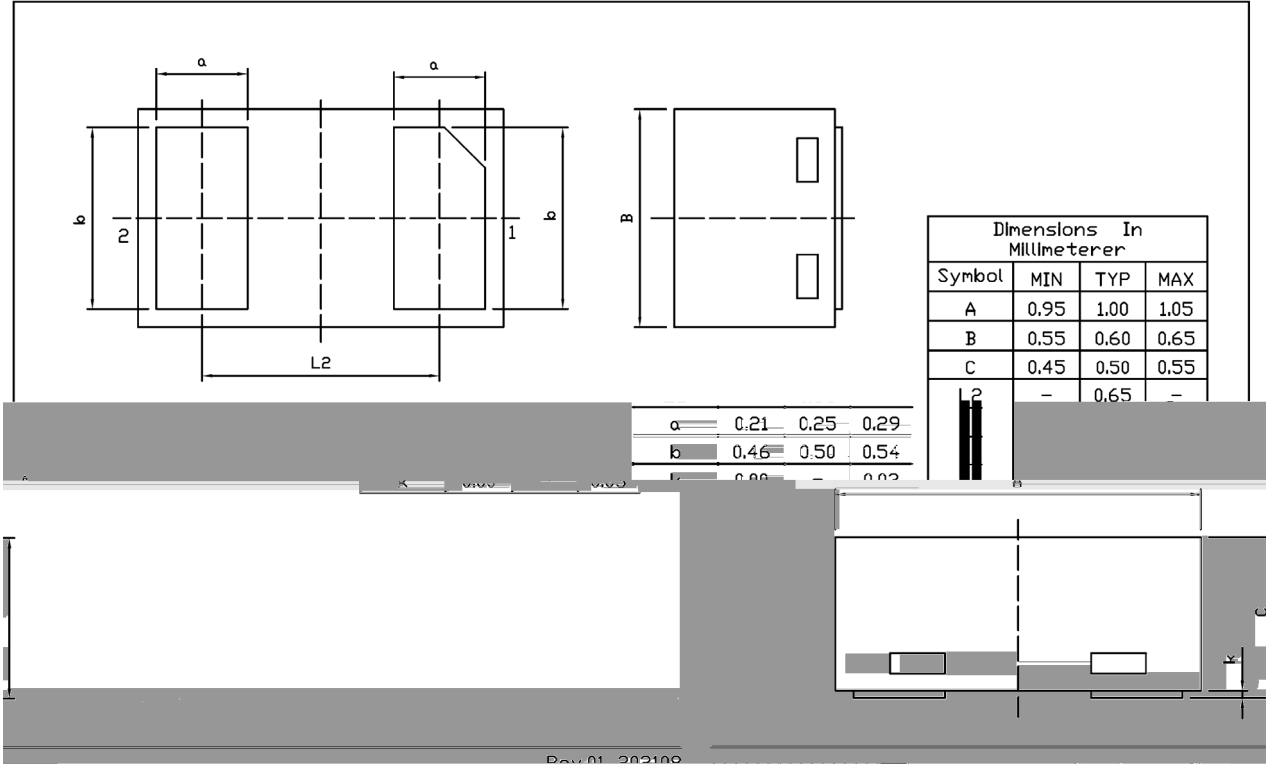

/ Marking Instructions



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

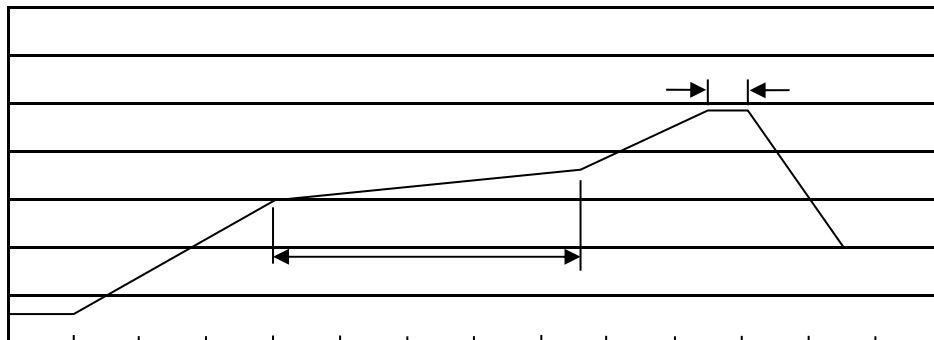

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices