



/ Descriptions**/ Features****/ Applications****/ Equivalent Circuit****/ Pinning****/ h_{FE} Classifications & Marking**


/ Absolute Maximum Ratings(Ta=25)

	°C		
	°C		
	°C		
			°C
			°C
			°C


/ Electrical Characteristics(Ta=25)

		°C				

/ Electrical Characteristic Curve

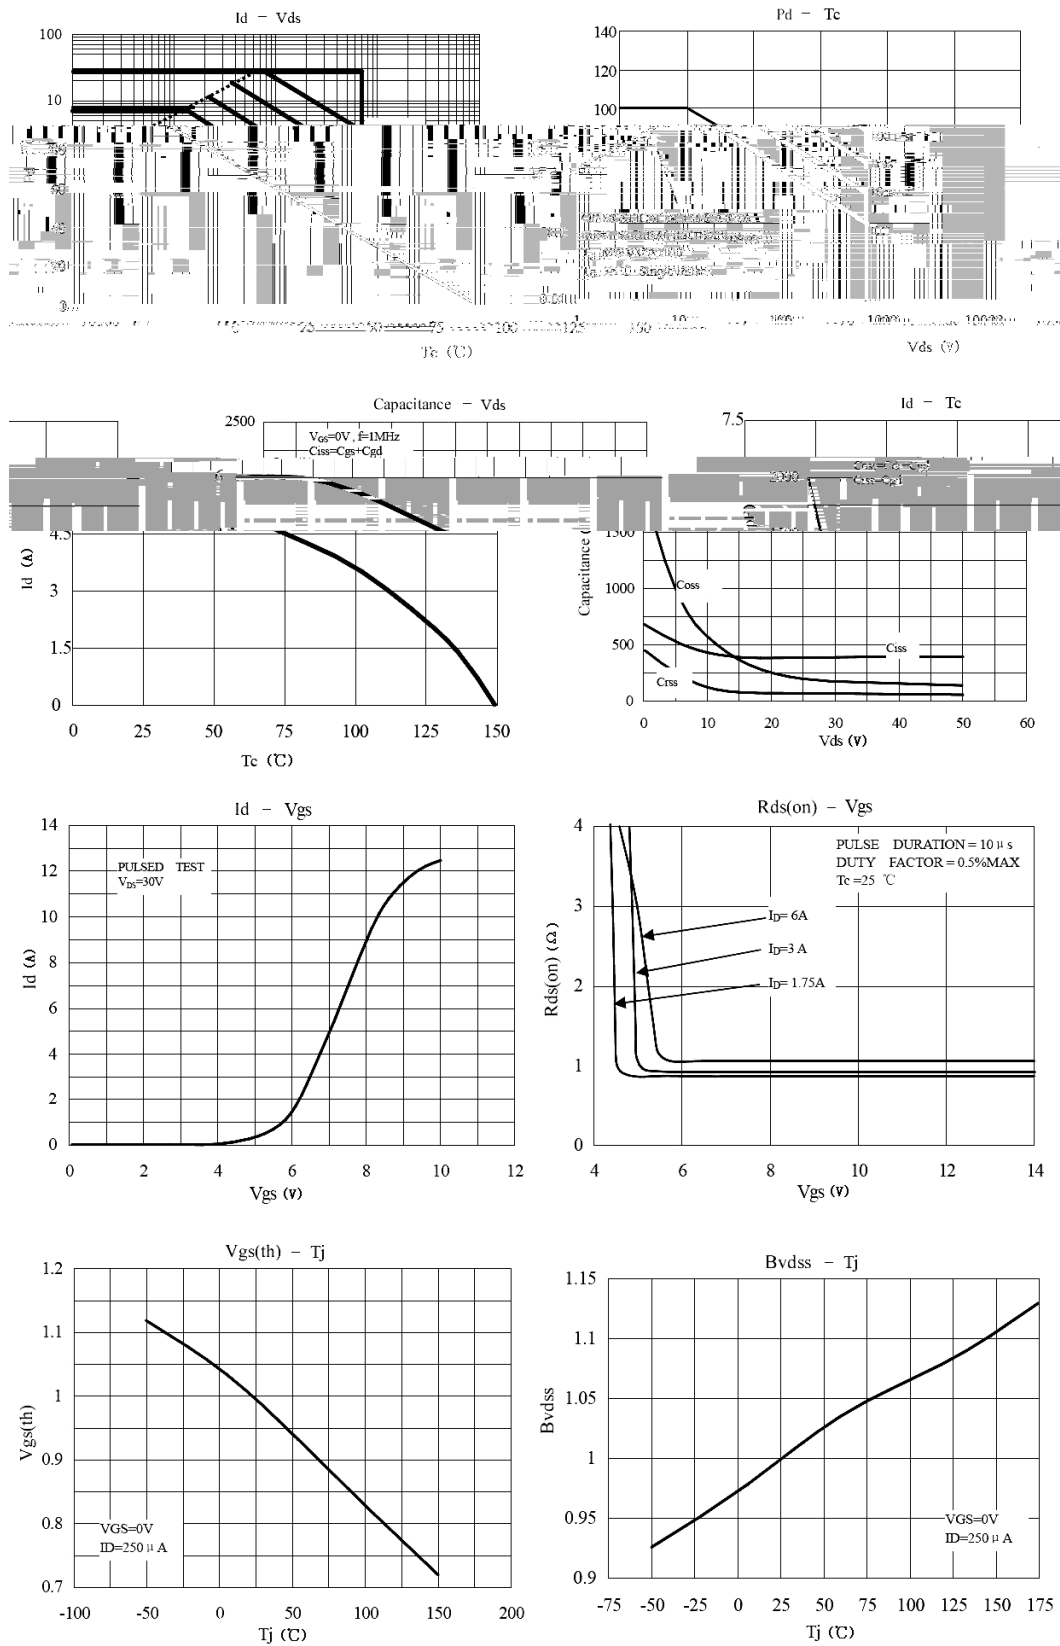

/ Package Dimensions

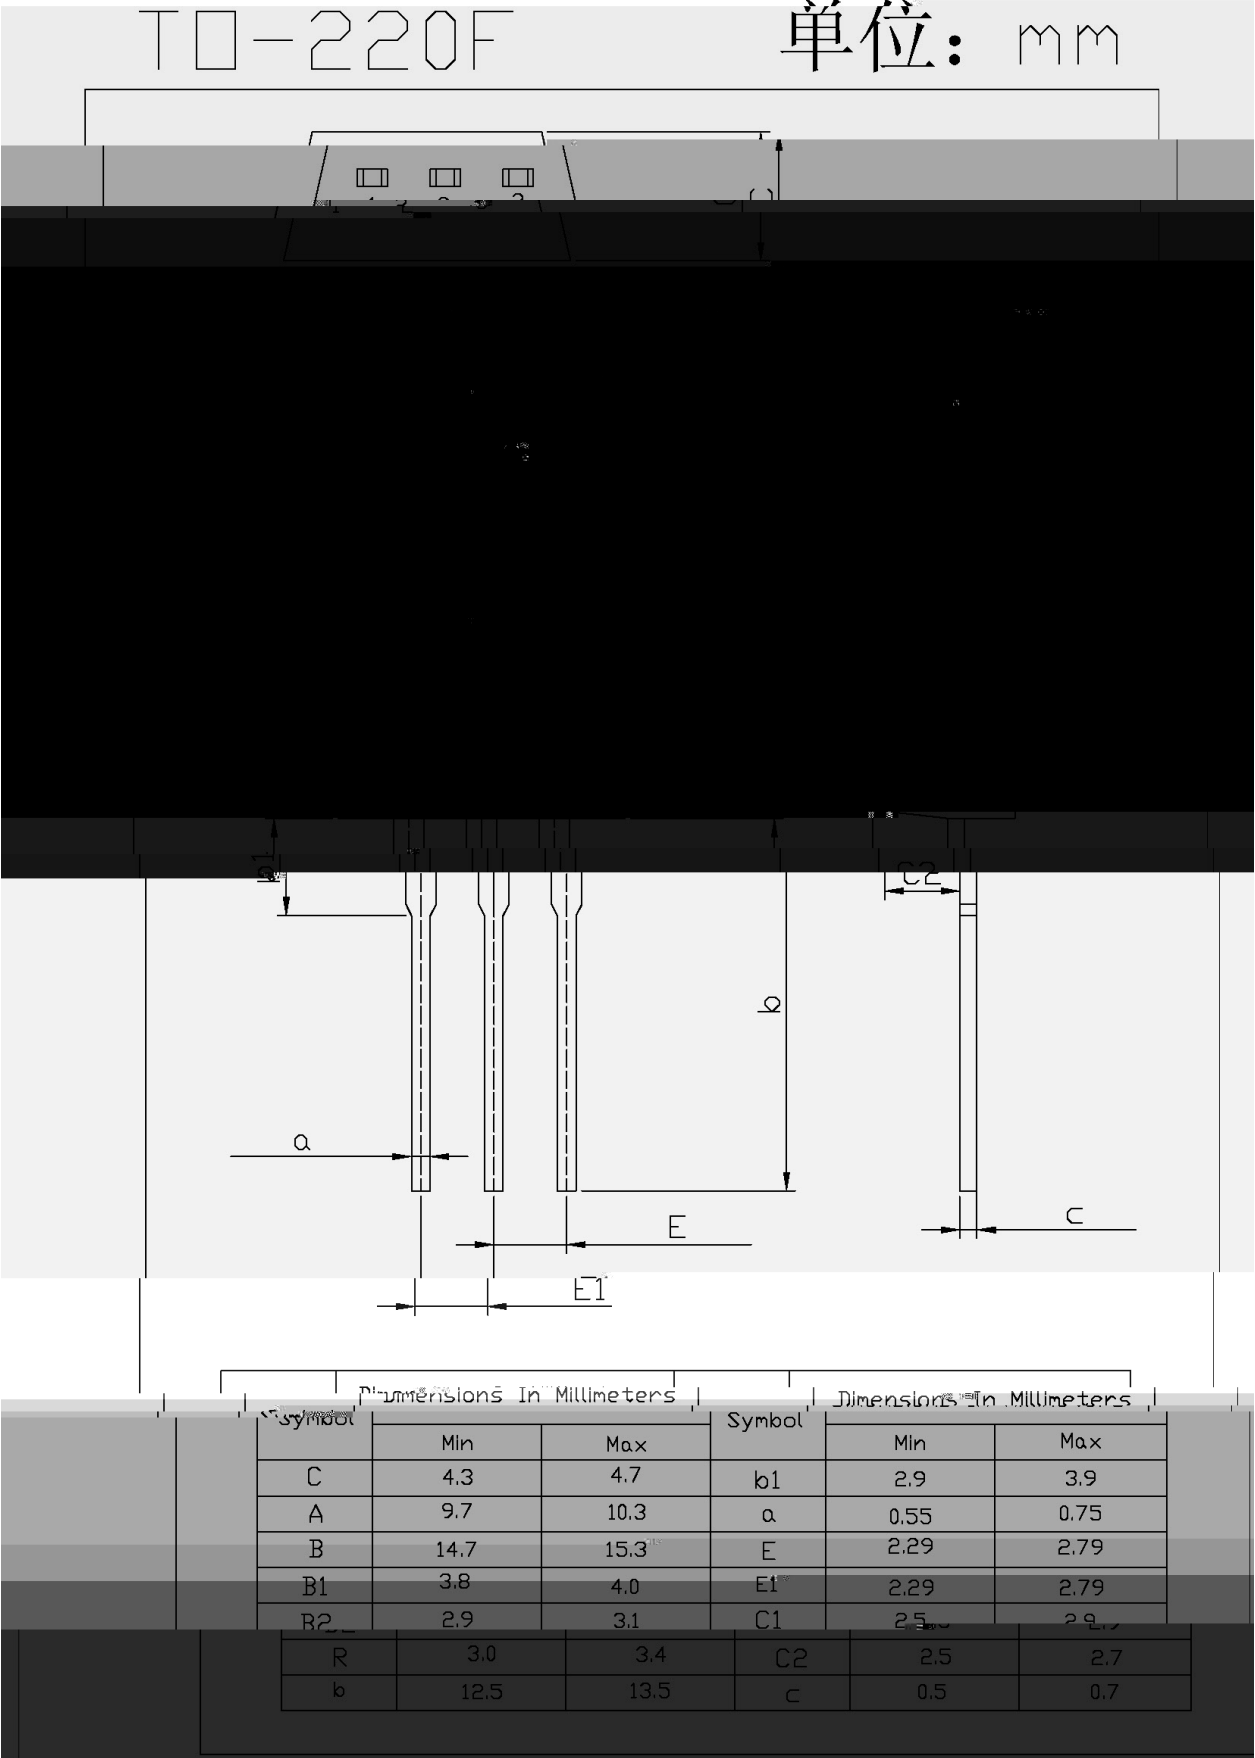

/ Marking Instructions

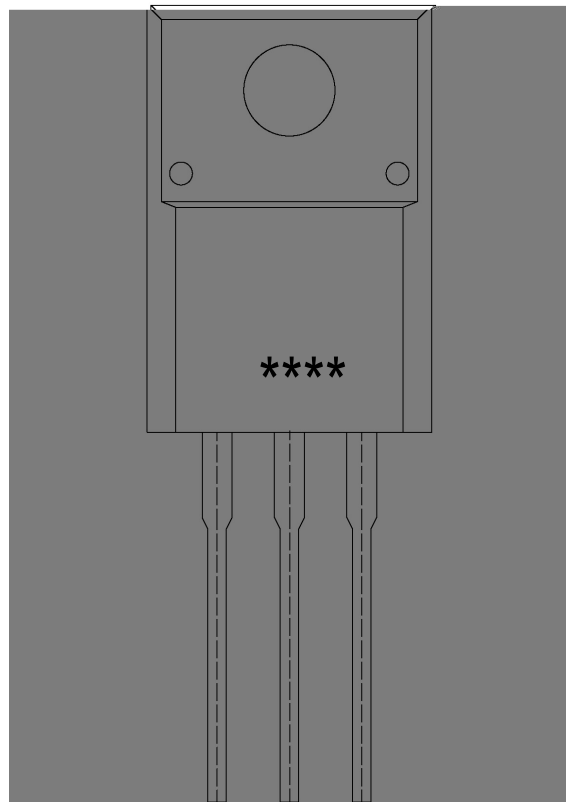


Figure 1 is a line graph showing the temperature profile of the sample during the experiment. The y-axis represents Temperature (°C) from 0 to 300, and the x-axis represents Time (sec) from 0 to 220. The curve starts at 20°C at 20 sec, rises to 255±5°C at 135 sec, holds for 5±0.5 sec, and then cools to 105°C at 180 sec. A horizontal dashed line at 25°C is labeled '86 ~ 100 sec'.

 $\pm$ $\pm$ $\pm$ $\pm$ $\pm$ $\pm$

°C

封装形式	包装数量					包装尺寸		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-220/F	200	10	2 000	5	10 000	135×190	237×172×102	560×245×195

封装形式	包装数量					包装尺寸		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

6 6