


/ Descriptions

650V


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

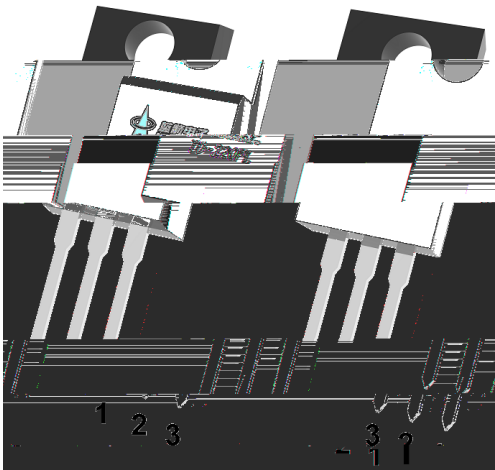




/ Marking

BRFL65R600C

/ Electrical Characteristics(Ta=25)

		μ				

/ Electrical Characteristic Curve

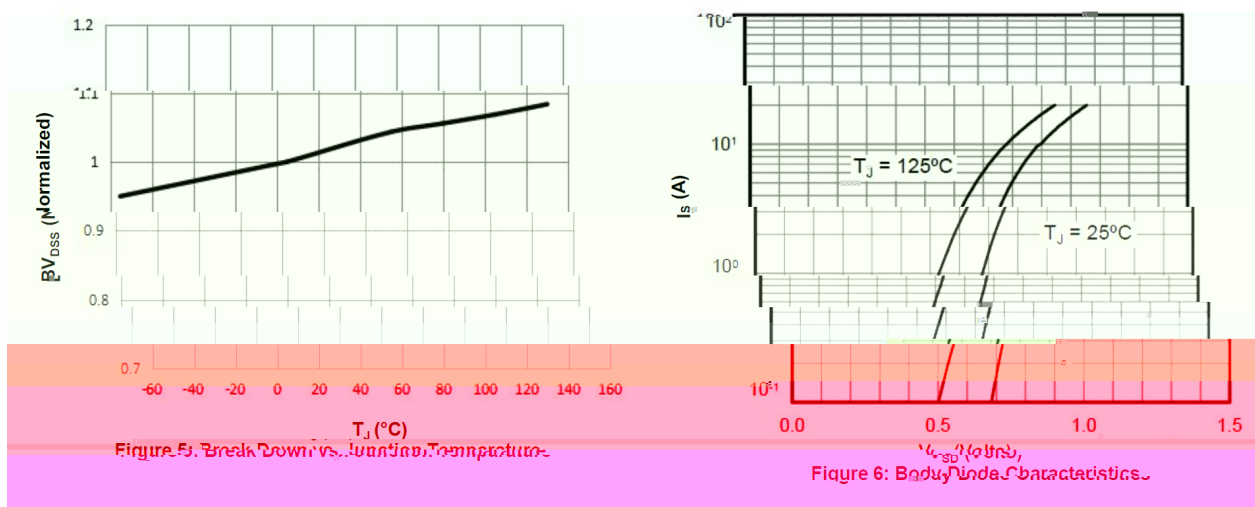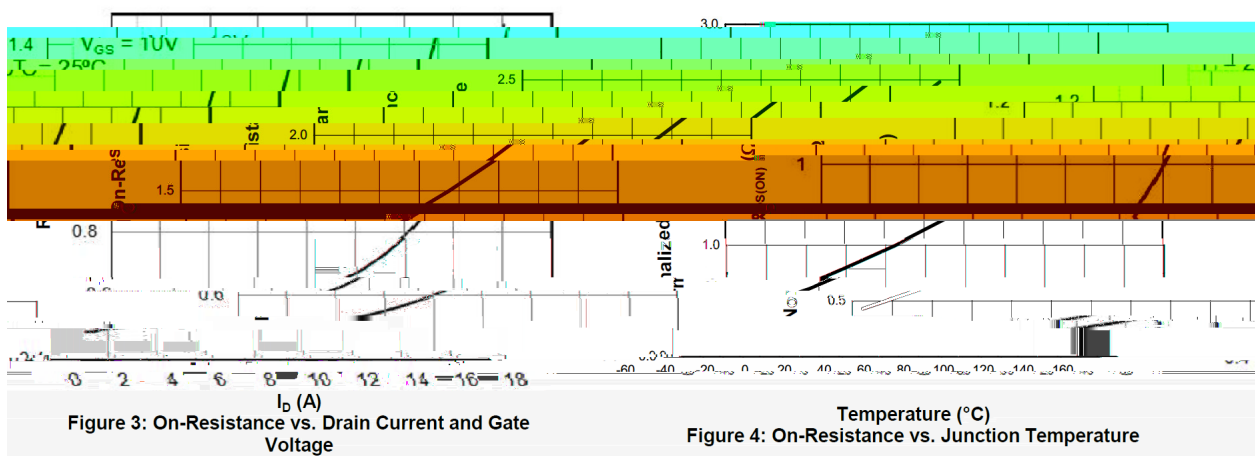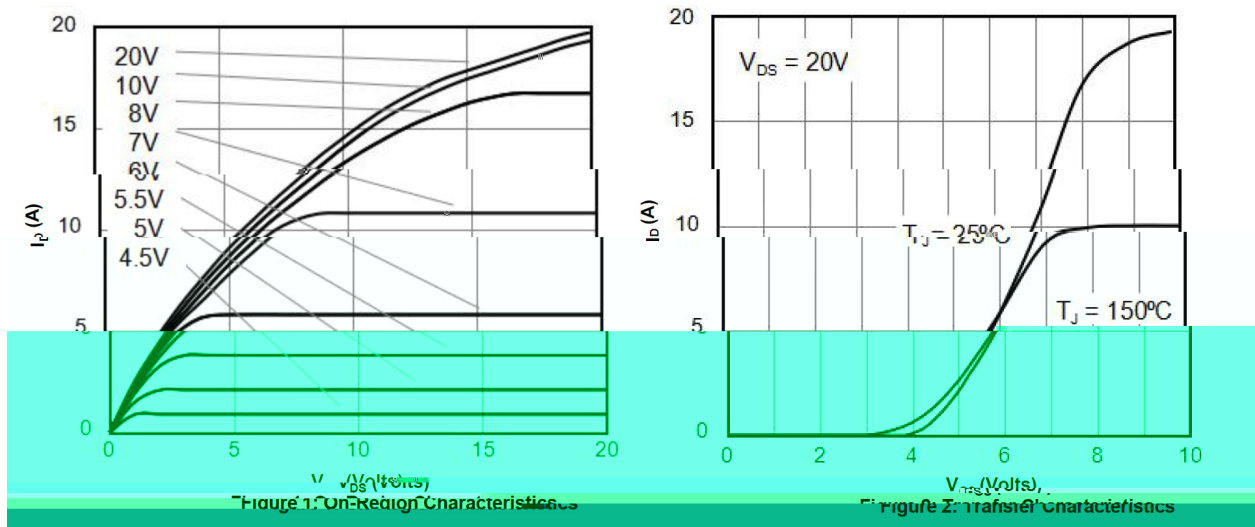

/ Electrical Characteristic Curve

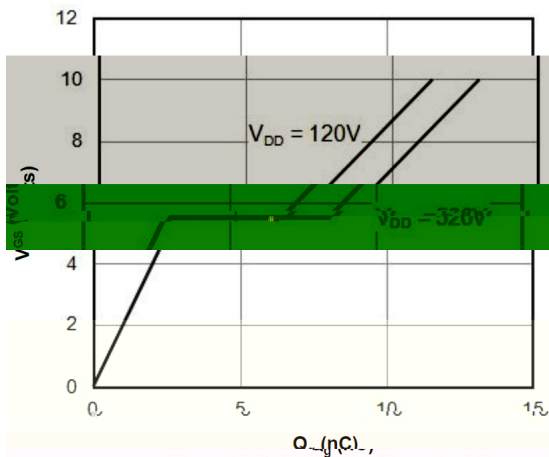


Figure 7: Gate-Charge Characteristics




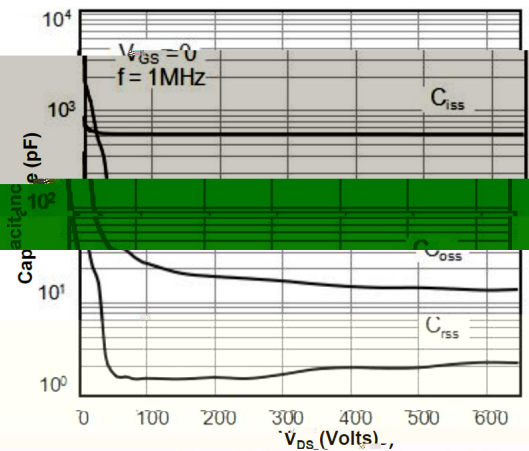



Figure 8: Capacitance Characteristics

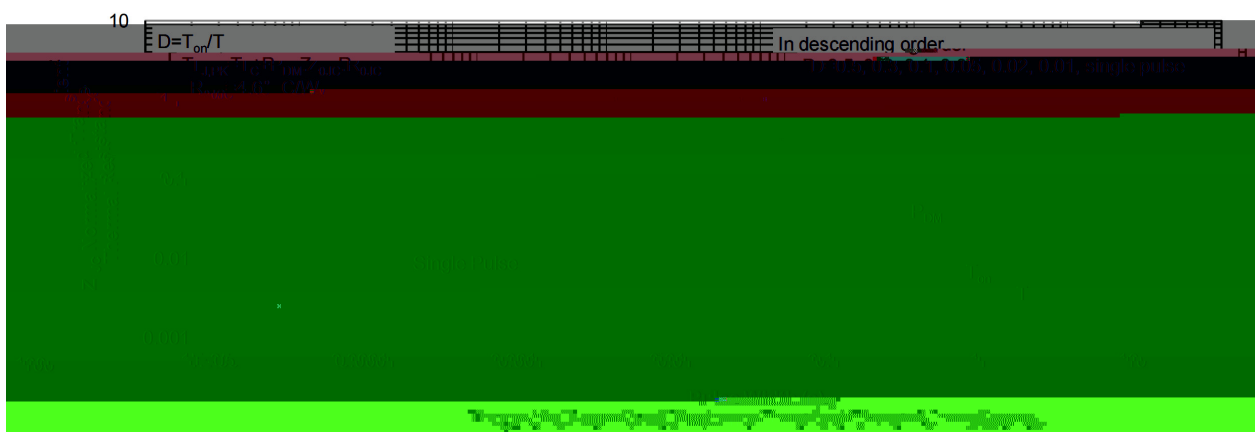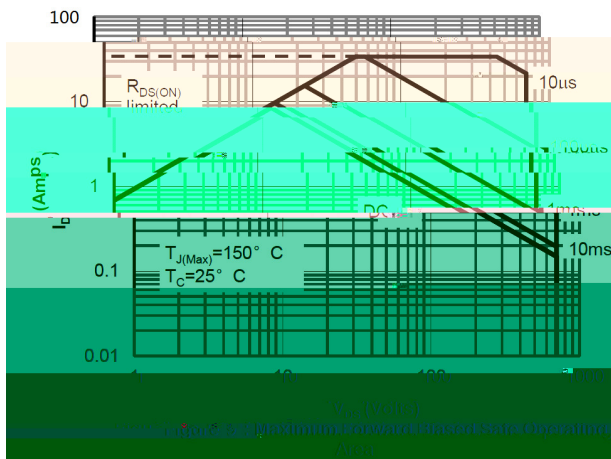


/ Package Dimensions

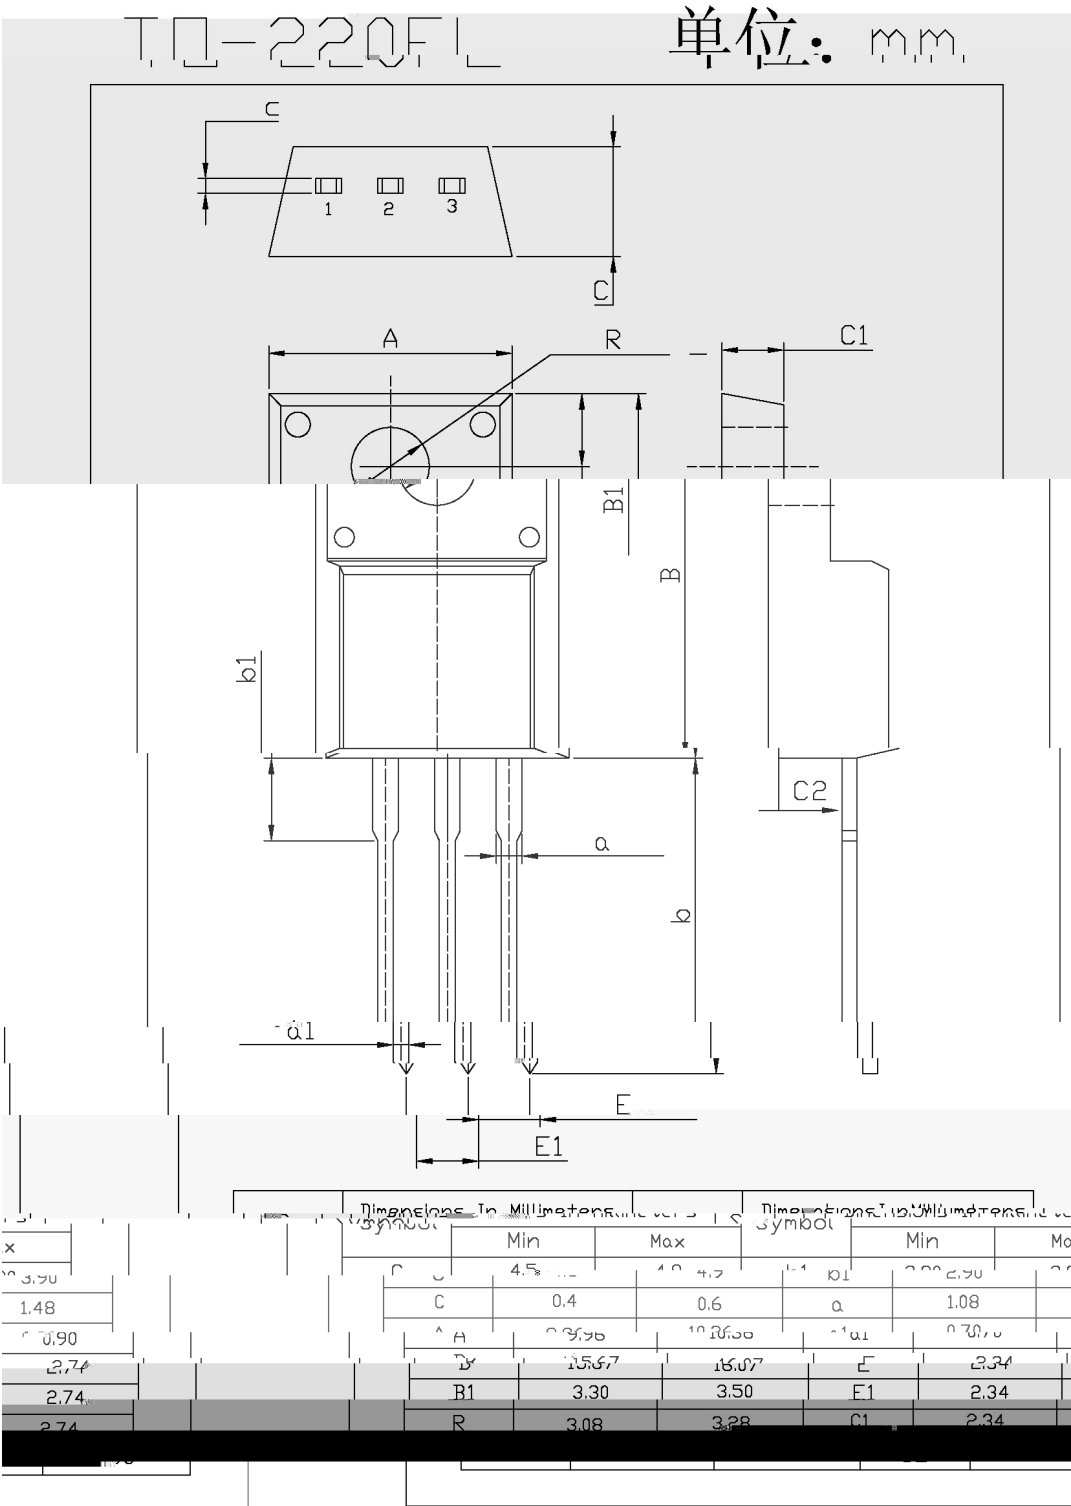

/ Marking Instructions

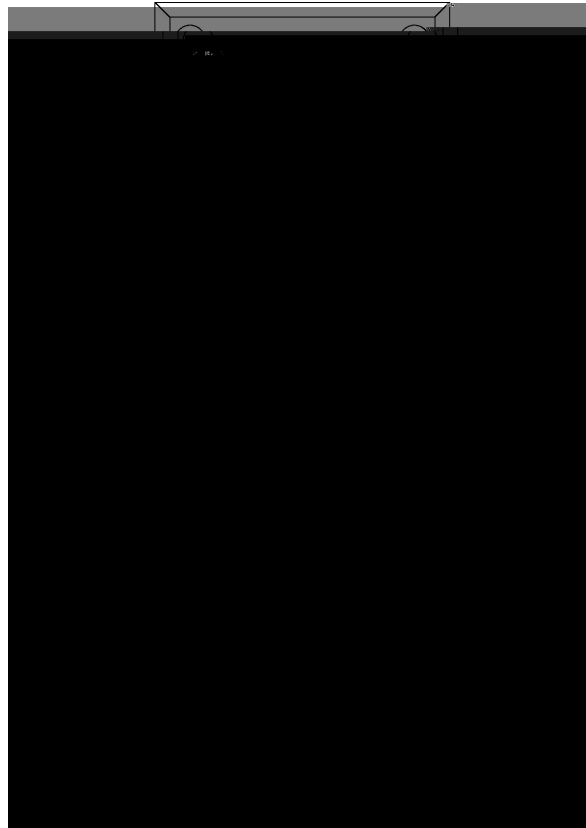

() / Temperature Profile for Dip Soldering(Pb-Free)

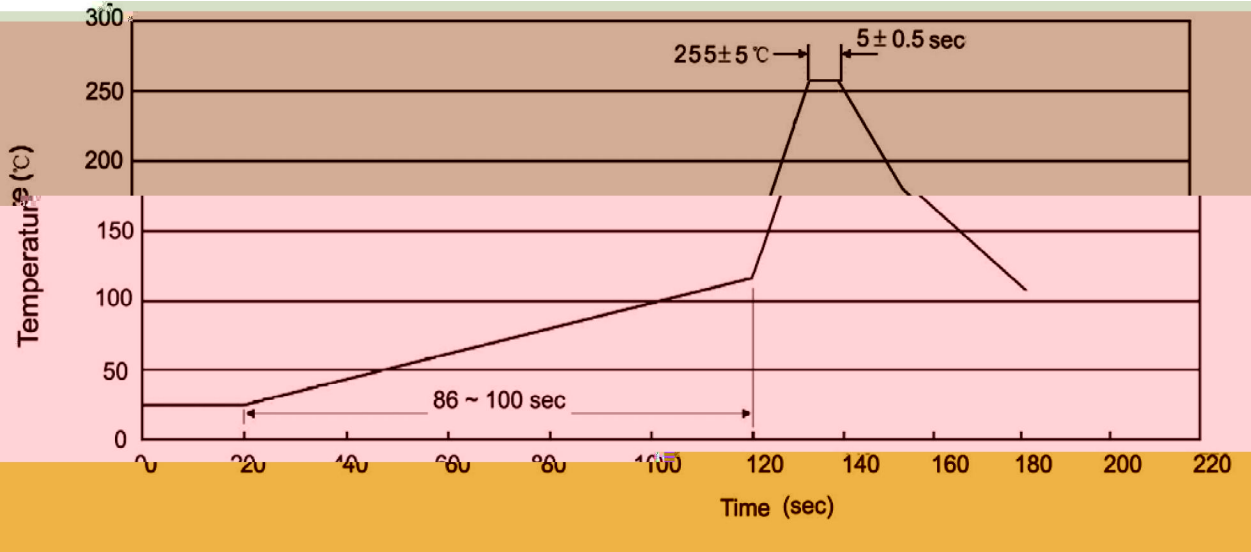

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices