

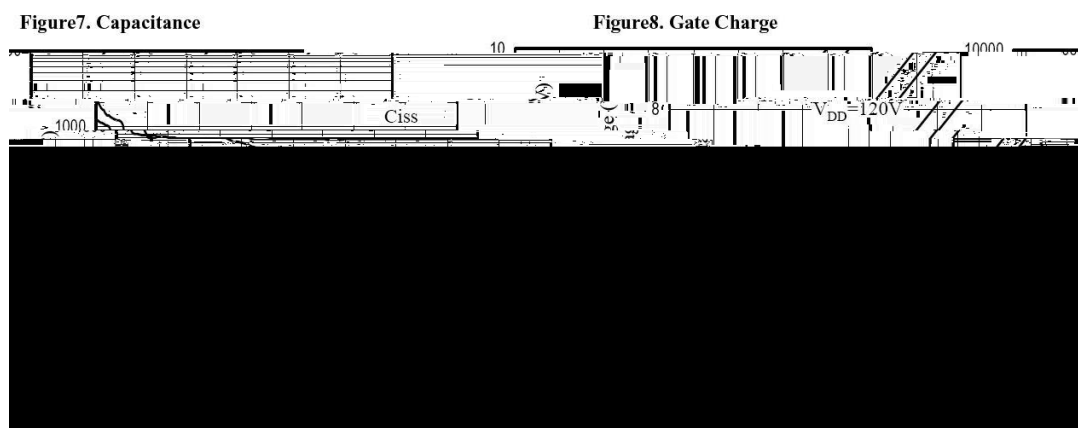


Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DSS}	600	V
Drain Current	I_D	7	A
Drain Current - Pulsed	I_{DM}	28	A
Gate-Source Voltage	V_{GSS}	± 30	V
Single Pulsed Avalanche Energy	E_{AS}	500	mJ
Repetitive Avalanche Energy	E_{AR}	54	mJ
Single Pulse Avalanche Current	I_{AS}	3.3	A
Power Dissipation	$P_D(T_C=25^\circ C)$	95	W
Junction and Storage Temperature Range	T_J, T_{STG}	-55 to 150	


/ Electrical Characteristic Curve

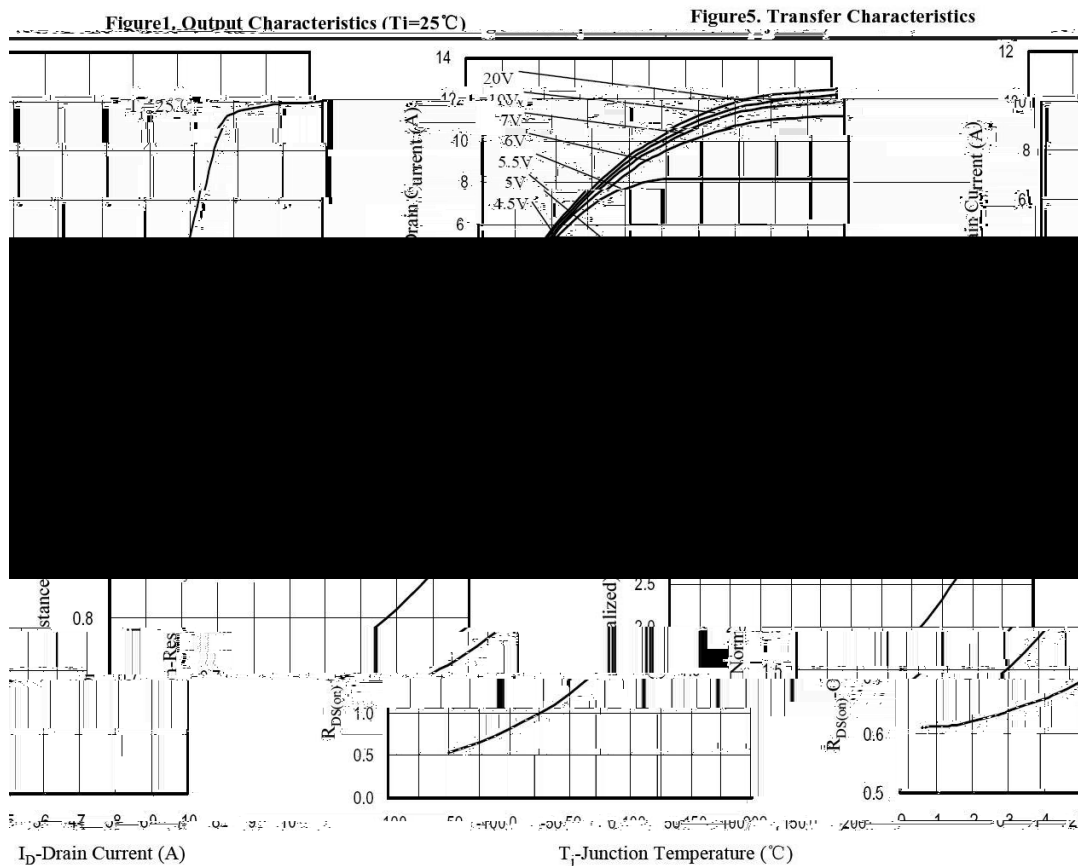

/ Package Dimensions

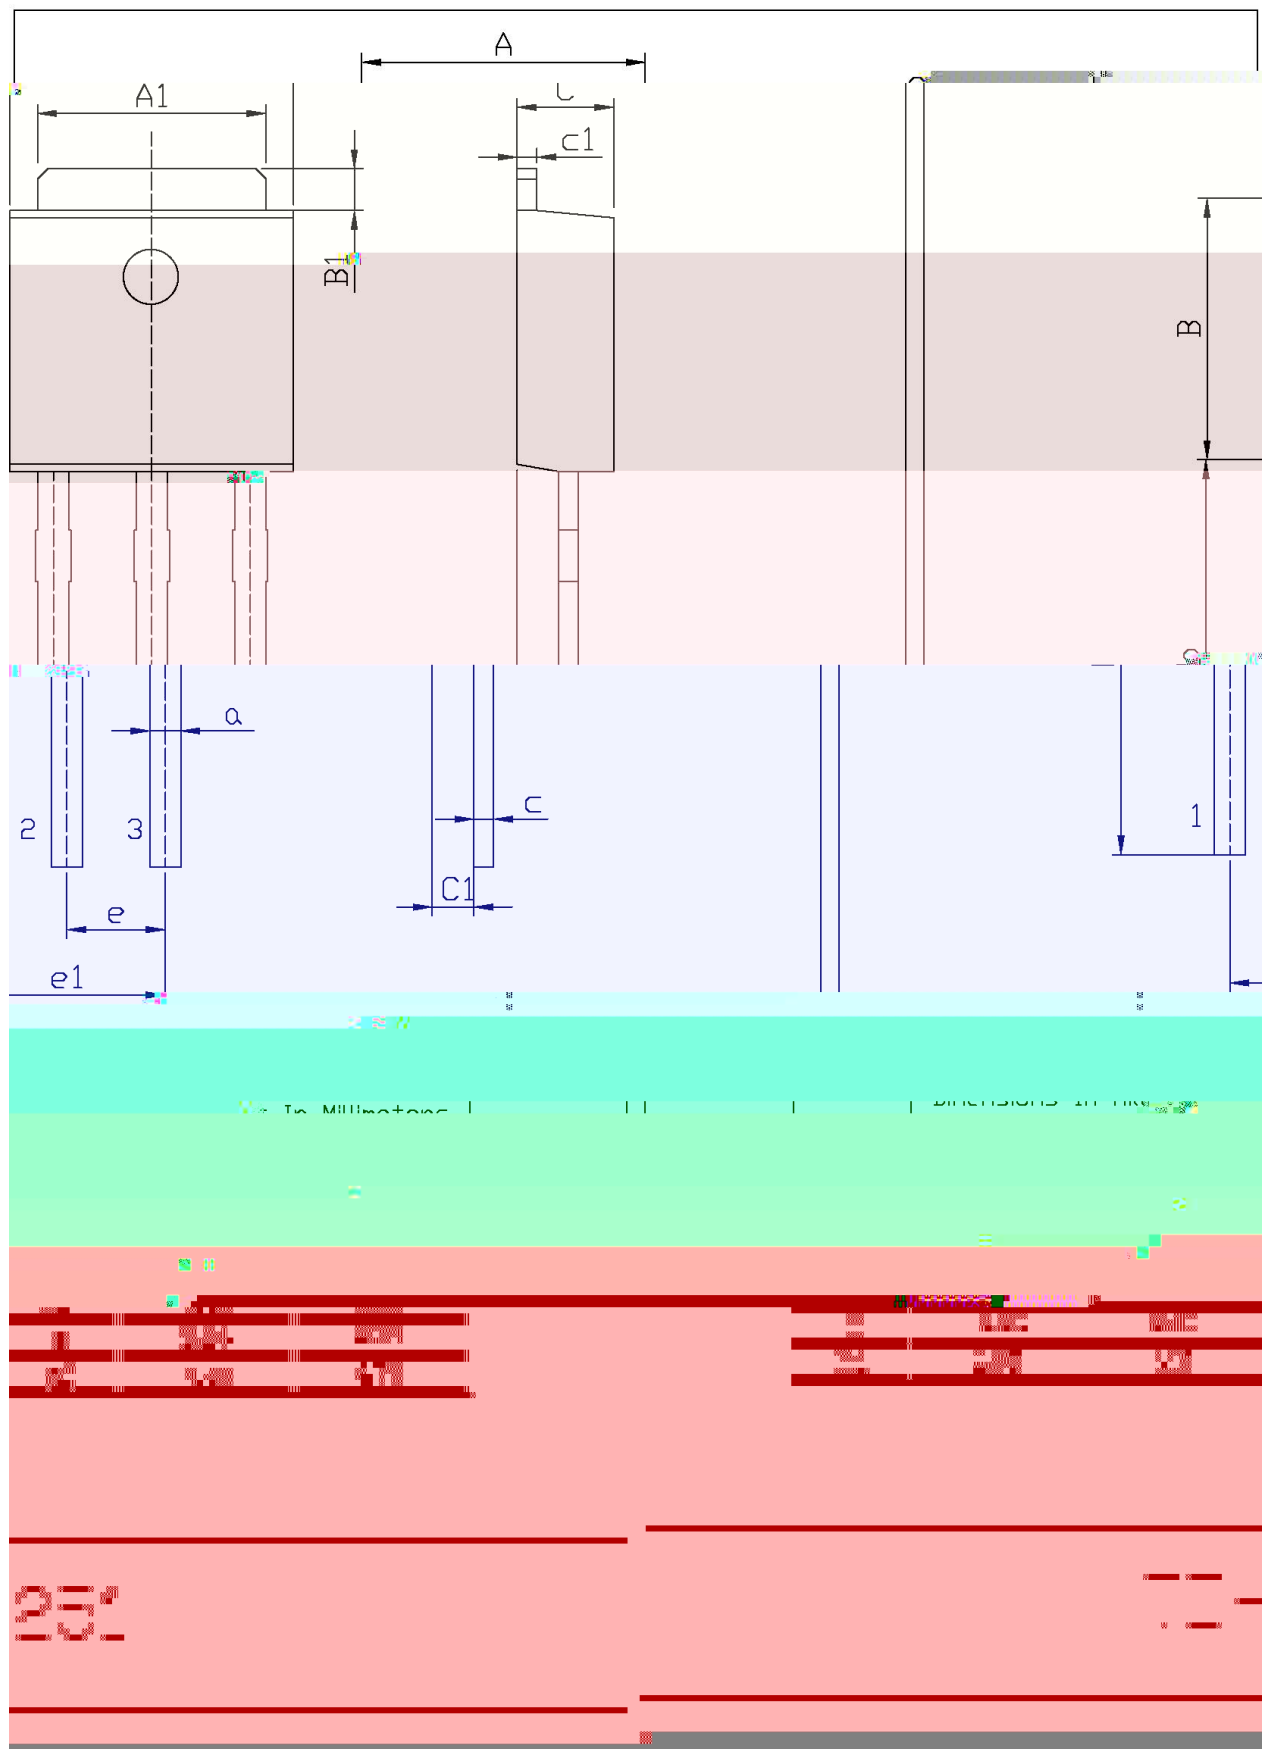

/ Marking Instructions

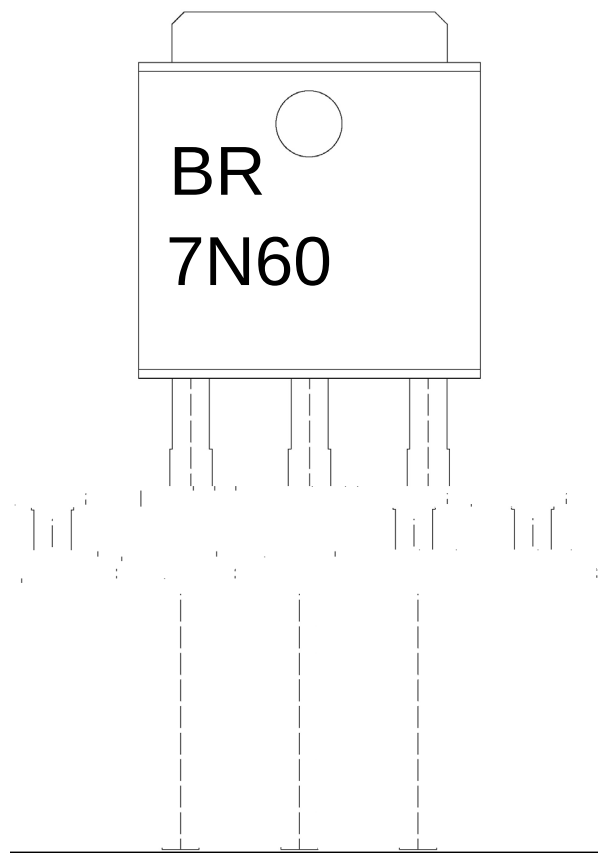

BR

7N60


Note:

BR: Company Code

7N60: Product Type.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

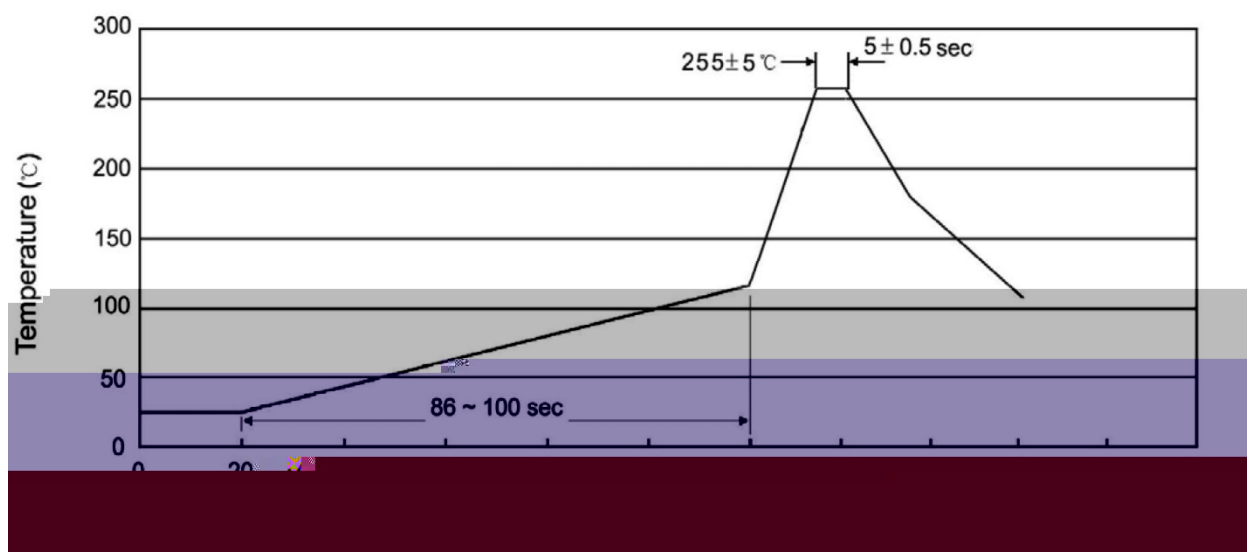

Note:

- | | | | | | |
|---|--------|------|-----------|--------|---|
| 1 | 25 | 150% | 60 | 90sec; | 1.Preheating:25~150%, Time:60~90sec. |
| 2 | 255±5% | | 5±0.5sec; | | 2.Peak Temp.:255±5%, Duration:5±0.5sec. |
| 3 | | 2 | 10%/sec. | | 3. Cooling Speed: 2~10%/sec. |

/ Resistance to Soldering Heat Test Conditions

270±5% 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只套管	套管盒	只盒	盒箱	只箱	套管	盒	箱

/ Notices