
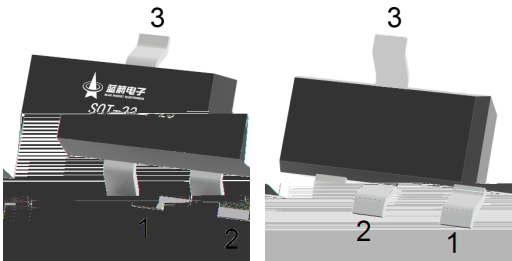


VRW056 MM SQS æM ȳ s ll 1

ɔ ll ɔ ll l 933 pD l ȳ T DHF0T434 %' l ó ɔ l ñ f β
K

ᄡᄡ ᄡ ᄡᄡ ᄡ l ᄡ ᄡ Z ᄡ ᄡᄡᄡᄡ ɔ



X

X









X

Table 1: Test Results of the Device

Test Item	Test Method	Test Result	Remarks


Table 2: Test Results of the Device


Test Item	Test Method	Test Result	Test Result	Test Result	Test Result	Remarks
		μ				
		μ				
						μ

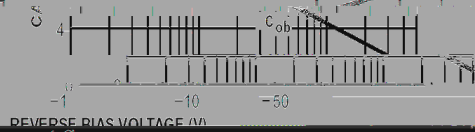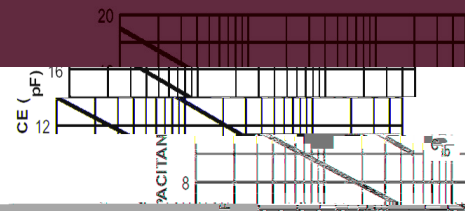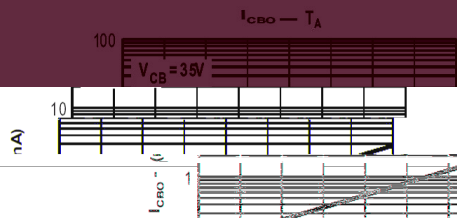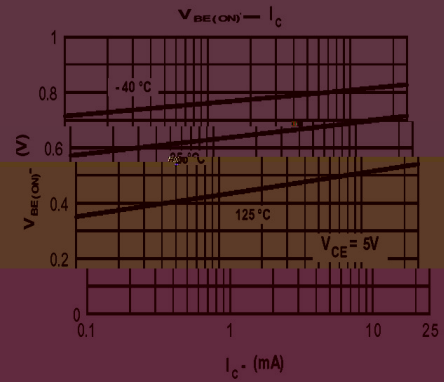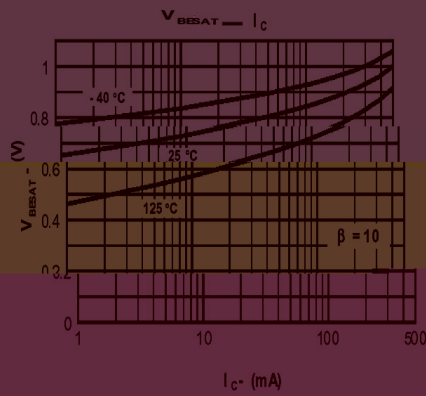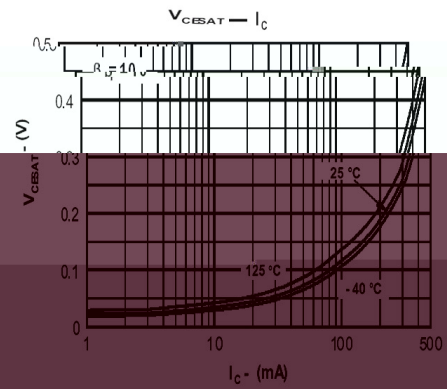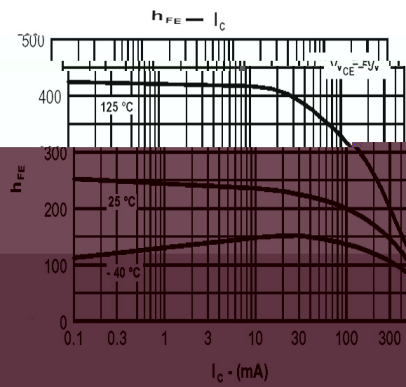

SOT-23

单位: mm

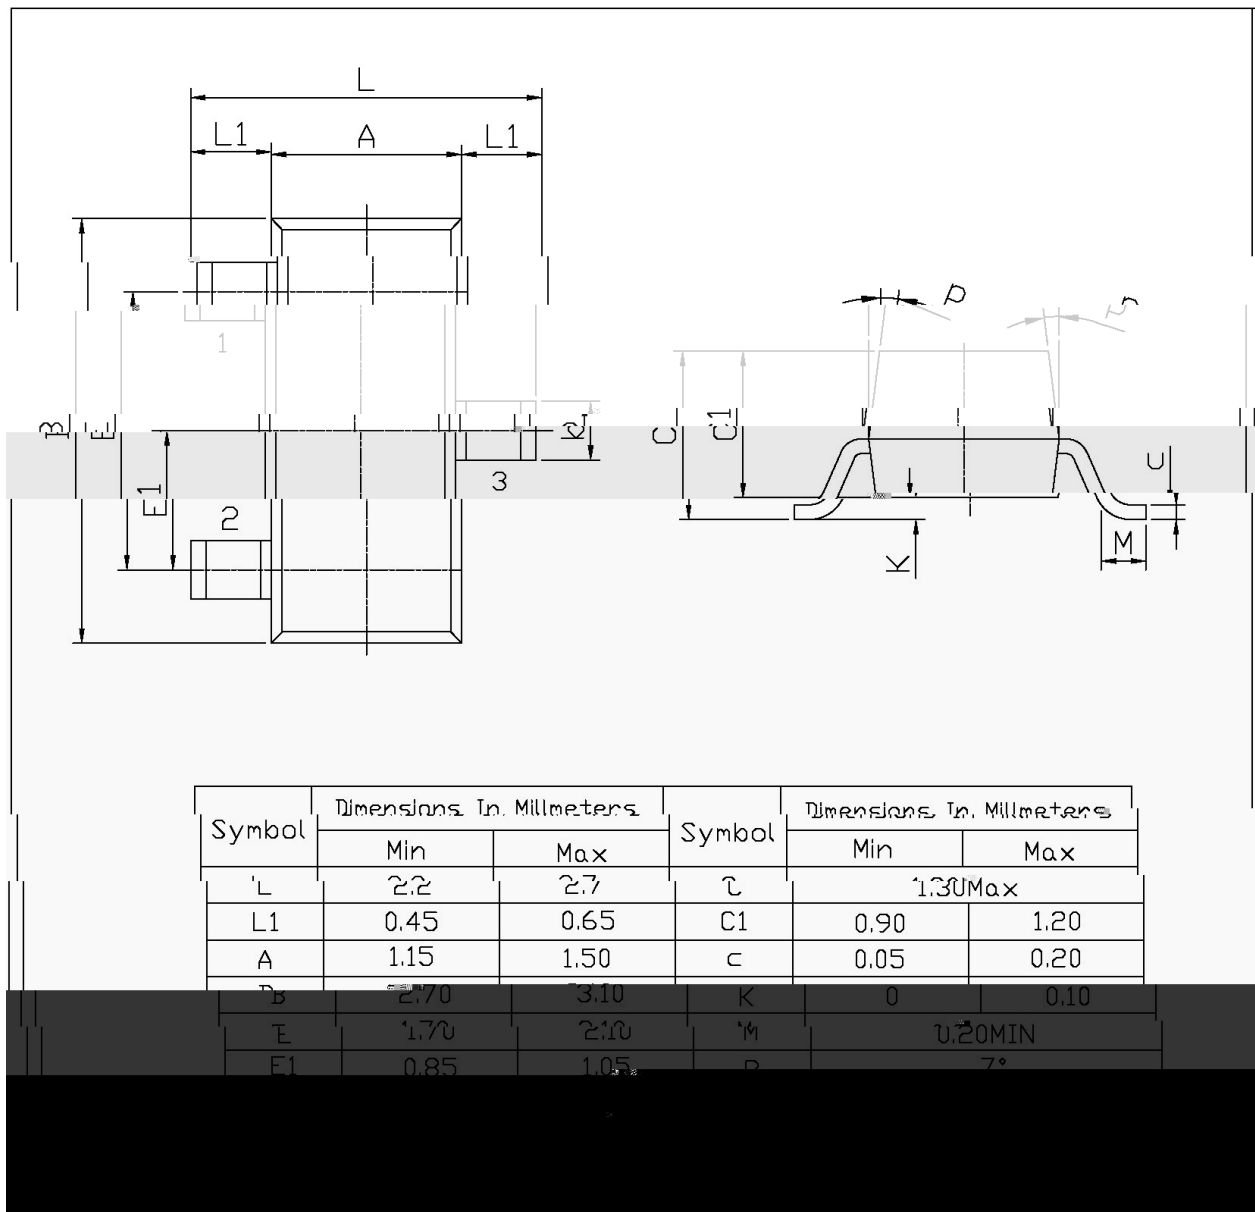

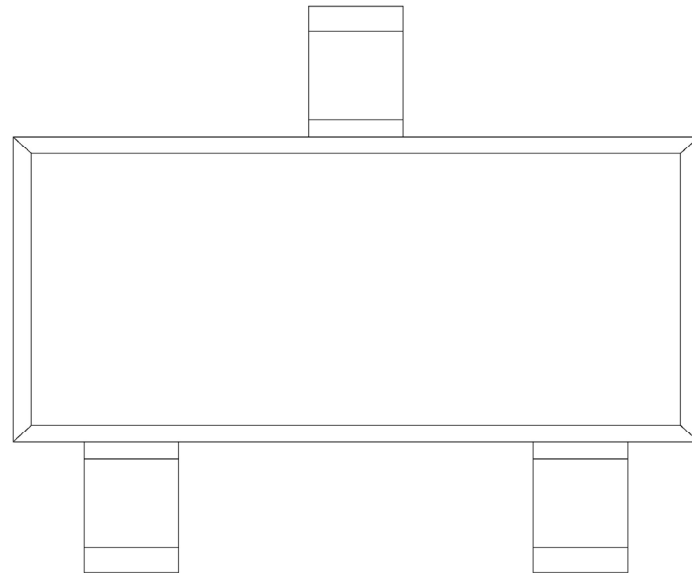

” X

T X 𐄂 𐄂 𐄂 𐄂 𐄂 %

X 𐄂 𐄂 N 𐄂

X

Temperature Profile for IR Reflow Soldering(Pb-Free)

” X

♫ □ ŷ K † i`H K

†

Š Œ □ ŷ ° † i`H      `Y ʌ ʌ °

° †

°

i` ʌ, ɔ ŷ ʌ K †

†

□ ŷ X ° † `H      I`