


[illegible]






/ Absolute Maximum Ratings(Each Transistor,Ta=25 )


|  |  |   |   |
|--|--|---|---|
|  |  |   |   |
|  |  |   |   |
|  |  |   |   |
|  |  |   |   |
|  |  |   |   |
|  |  |   |   |
|  |  |   | ℃ |
|  |  | ~ | ℃ |


/ Electrical Characteristics((Each Transistor,Ta=25 )

|  |  |  |  |  |  |  |
|--|--|--|--|--|--|--|
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |
|  |  |  |  |  |  |  |




/ Electrical Characteristic Curve

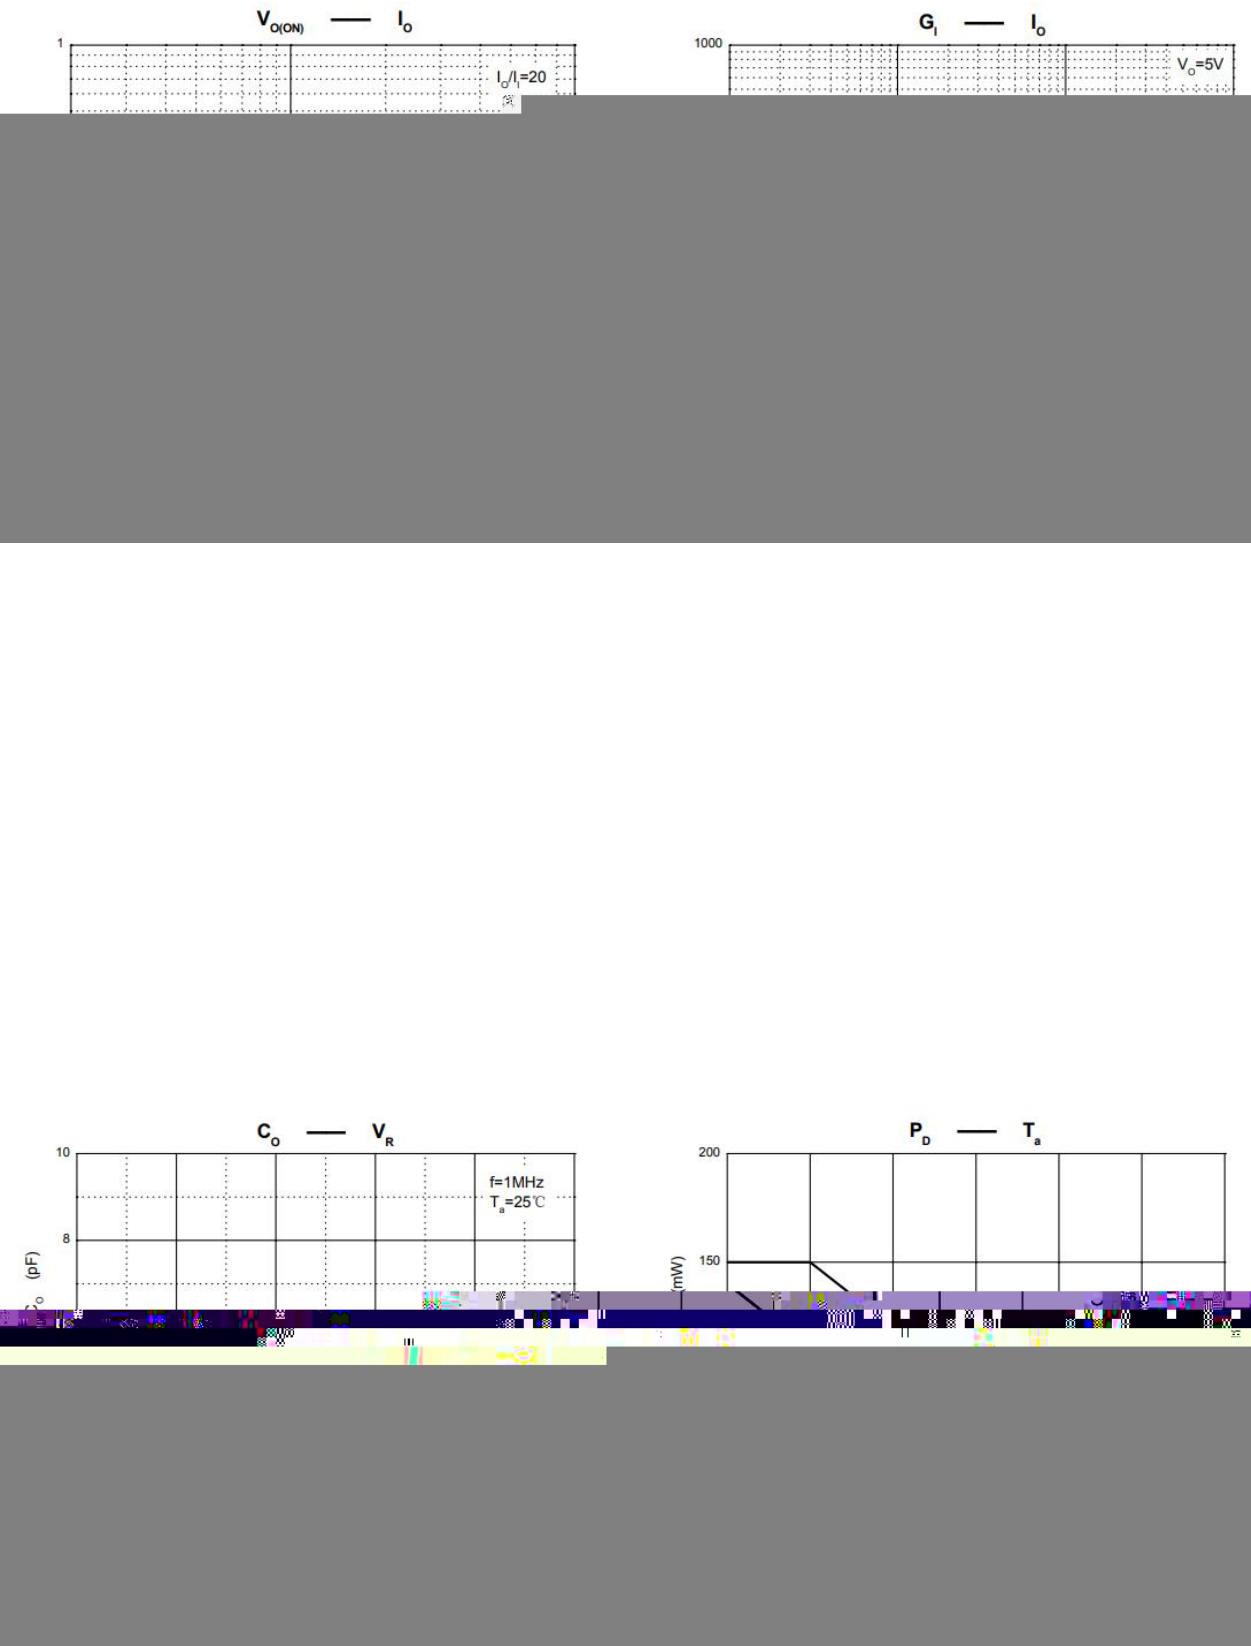





/ Package Dimensions

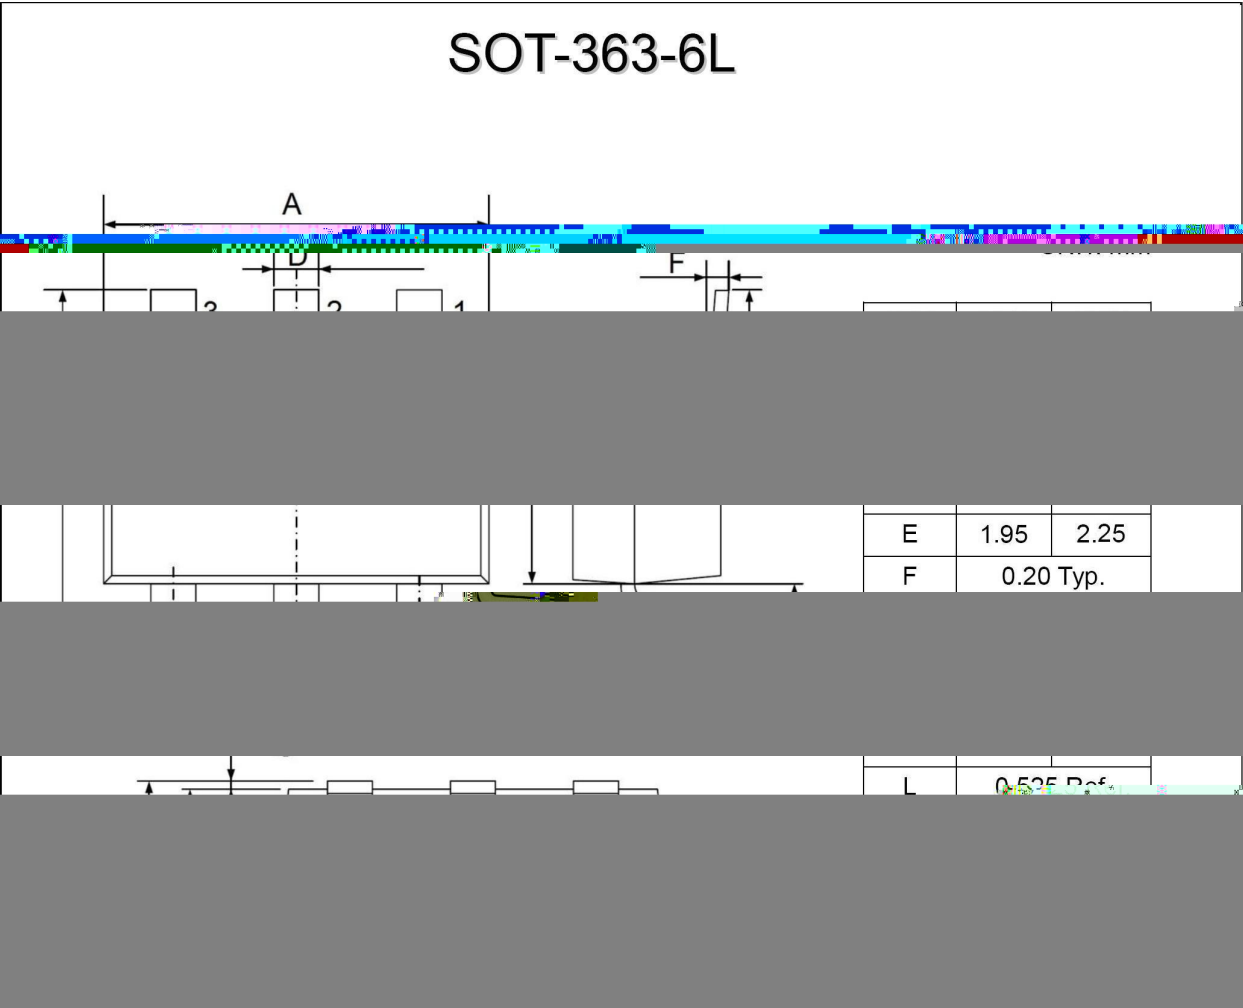





(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

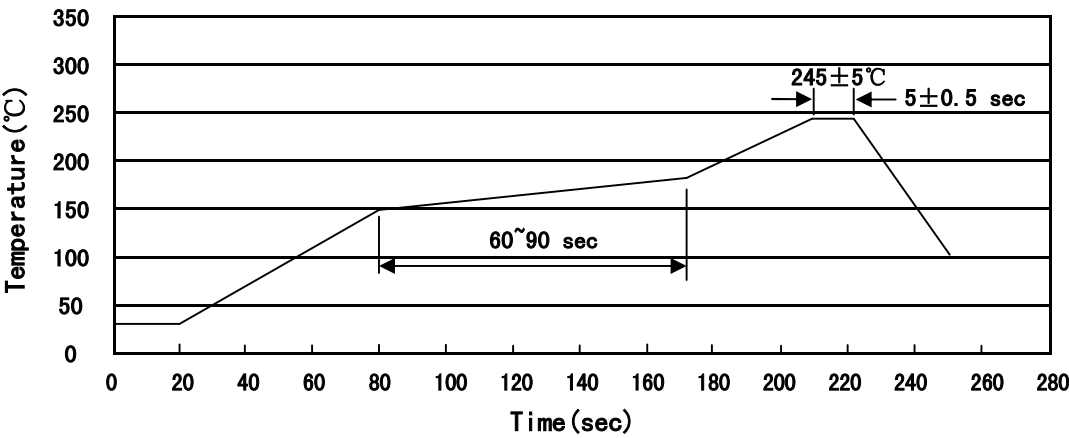

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

| 封装形式 | 包装数量 |      |     |     |     | 包装尺寸 |   |   |
|------|------|------|-----|-----|-----|------|---|---|
|      | 只 卷盘 | 卷盘 盒 | 只 盒 | 盒 箱 | 只 箱 |      | 盒 | 箱 |
|      |      |      |     |     |     | "    |   |   |

/ Notices