


/ Descriptions

SOP-8


/ Features

/ Applications

/ Equivalent Circuit

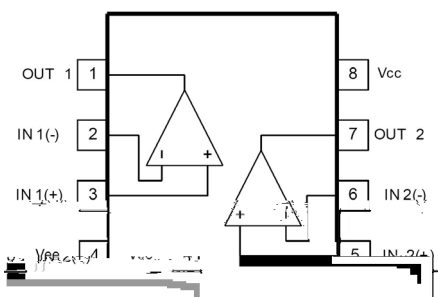

/ Pinning




PIN

/


/ Marking

BROP4558SC





DATA SHEET

/ Functional Block Diagram

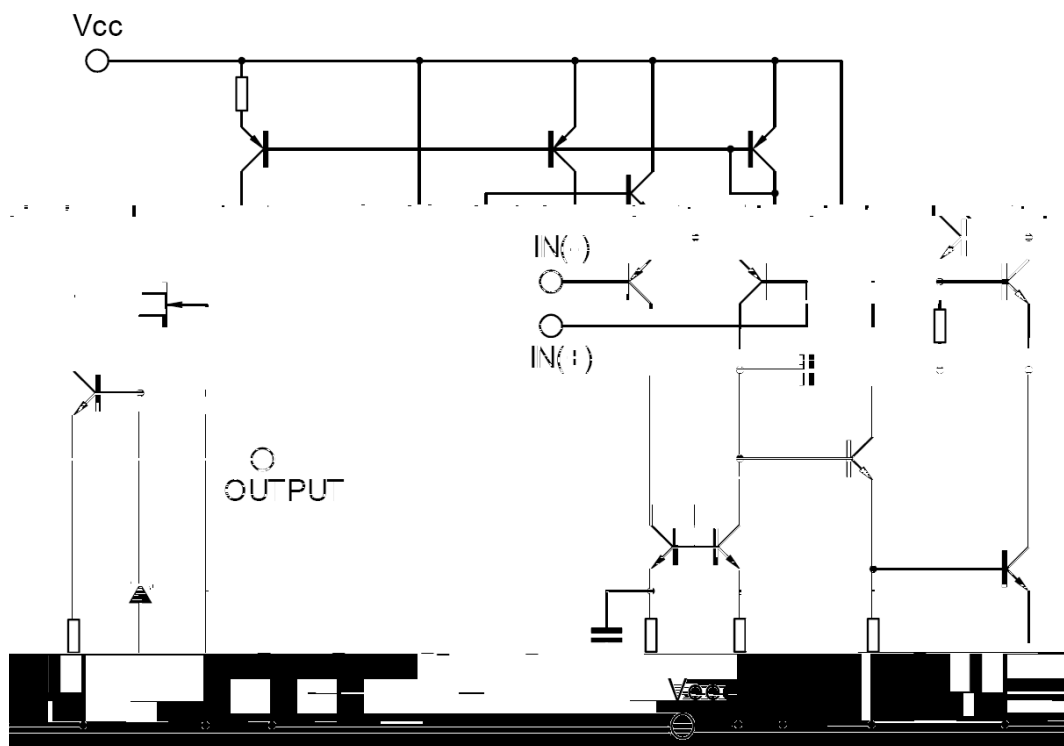




/ Electrical Characteristic Curve

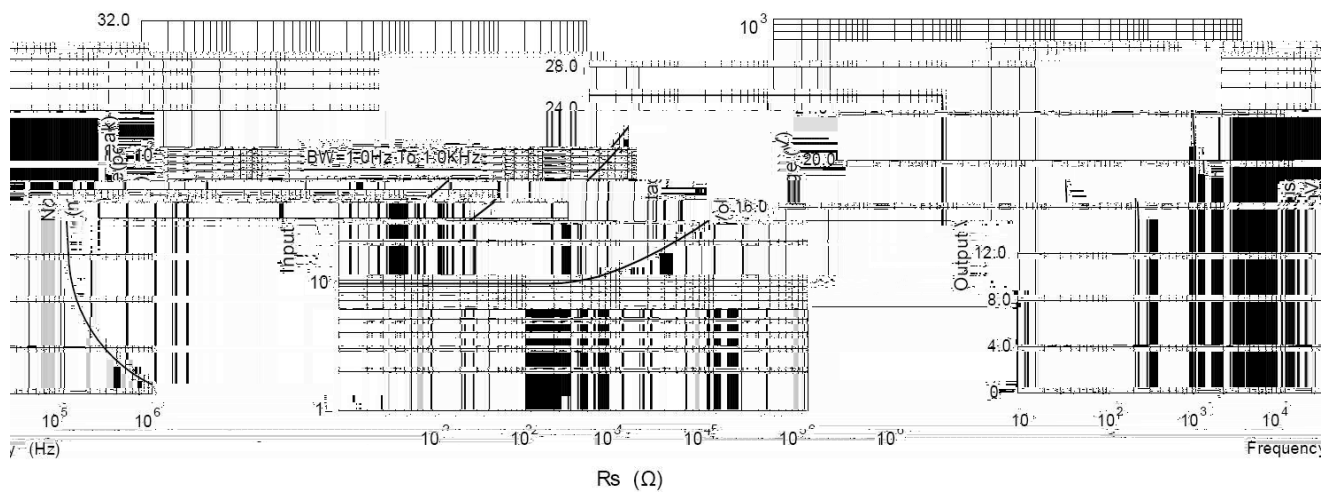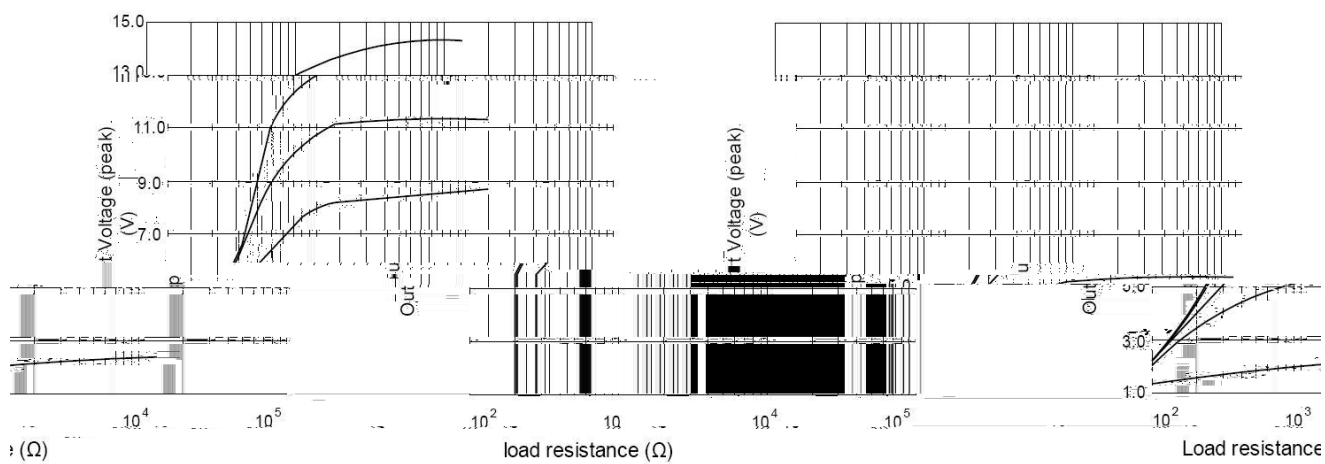

BROP4558SC


DATA SHEETr 5.6i33.5 1 T15 5

/ Package Dimensions

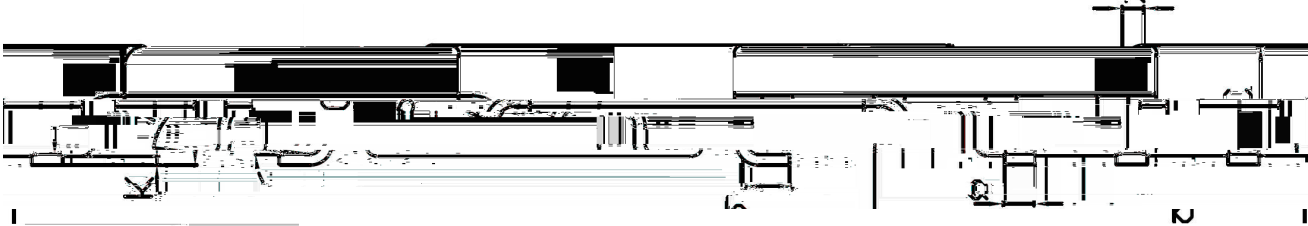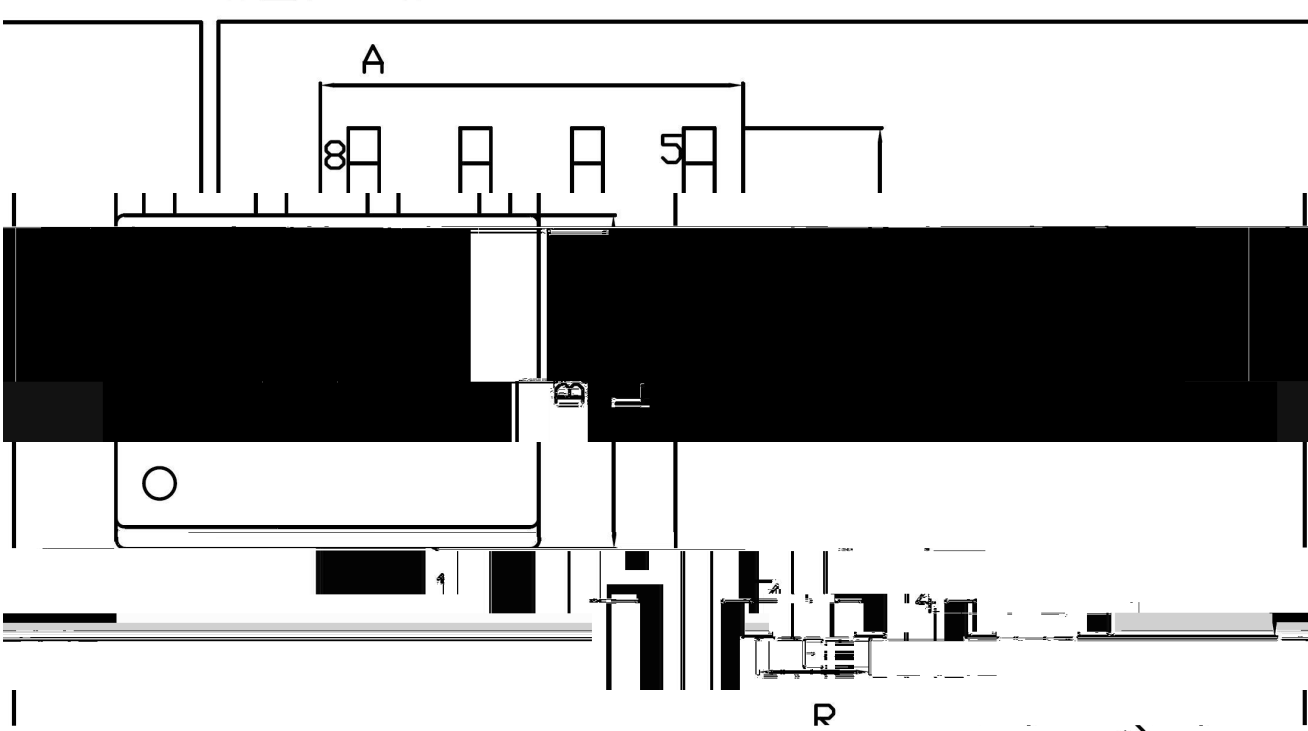



Dimensions in Millimeters				Dimensions in Millimeters			
Symbol	Min	Max		Symbol	Min	Max	
A	1.35	1.75		A	4.70	5.30	
B	0.75	0.10	0.45	B	0.70	0.10	0.40
C	0.20	0.20	0.20	C	0.20	0.20	0.20
D	0.20	0.20	0.20	D	0.20	0.20	0.20
E	0.20	0.20	0.20	E	0.20	0.20	0.20
F	0.20	0.20	0.20	F	0.20	0.20	0.20
G	0.20	0.20	0.20	G	0.20	0.20	0.20
H	0.20	0.20	0.20	H	0.20	0.20	0.20
I	0.20	0.20	0.20	I	0.20	0.20	0.20
J	0.20	0.20	0.20	J	0.20	0.20	0.20
K	0.20	0.20	0.20	K	0.20	0.20	0.20
L	0.20	0.20	0.20	L	0.20	0.20	0.20
M	0.20	0.20	0.20	M	0.20	0.20	0.20
N	0.20	0.20	0.20	N	0.20	0.20	0.20
O	0.20	0.20	0.20	O	0.20	0.20	0.20
P	0.20	0.20	0.20	P	0.20	0.20	0.20
Q	0.20	0.20	0.20	Q	0.20	0.20	0.20
R	0.20	0.20	0.20	R	0.20	0.20	0.20
S	0.20	0.20	0.20	S	0.20	0.20	0.20
T	0.20	0.20	0.20	T	0.20	0.20	0.20
U	0.20	0.20	0.20	U	0.20	0.20	0.20
V	0.20	0.20	0.20	V	0.20	0.20	0.20
W	0.20	0.20	0.20	W	0.20	0.20	0.20
X	0.20	0.20	0.20	X	0.20	0.20	0.20
Y	0.20	0.20	0.20	Y	0.20	0.20	0.20
Z	0.20	0.20	0.20	Z	0.20	0.20	0.20

/ Marking Instructions

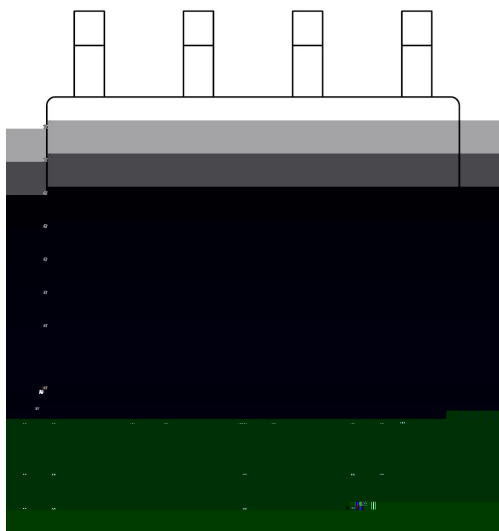

4558

() /

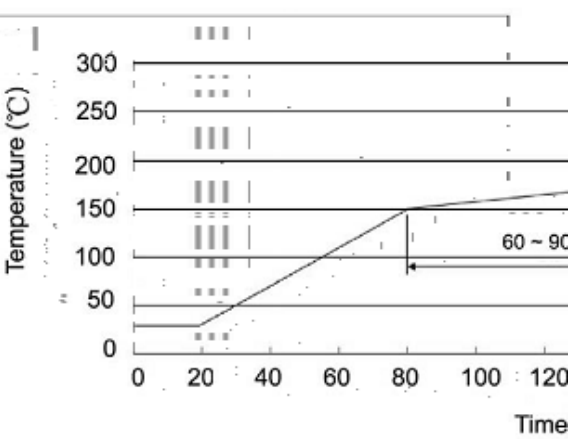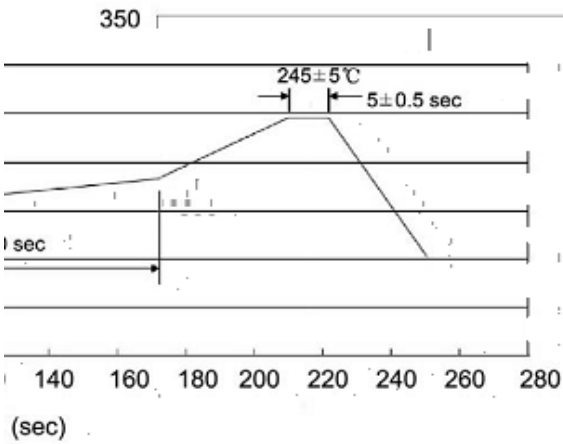

±

±

±

±

/ Resistance to Soldering Heat Test Conditions

±

±

±

±

/ Packaging SPEC.

封装形式		包装数量	包装尺寸
只	卷盘		
	卷盘盒		