

/ Absolute Maximum Ratings(Ta=25 °C)


Parameter		Symbol	Rating	Unit
Peak Pulse Power Dissipation on 10/1000 us waveform (Note1,Note2, Fig.1).		P _{PPM}	600	W
Peak Forward Surge Current,8.3ms Single Half Sine-Wave Superimposed on Rated Load, (JEDEC Method) (Note 3, Fig4).		I _{FSM} (UNI)	100	A
Peak Pulse Current on 10/1000 us waveform (Note 1, Fig 3)		I _{PPM}	see Table 1	A
ESD Voltage per IEC6100-4-2	Contact	V _{ESD1}	± 30	KV
	Air	V _{ESD2}	± 30	KV
Typical Thermal Resistance (Note 5)		R _{JA}	90	/W
		R _{JC}	18	/W
		R _{JL}	22	/W
Operating Junction Temperature and Storage Temperature Range		T _J , T _{stg}	-55 ~ +150	

Note:

1. Non-repetitive current pulse, per Fig.3 and derated above TA = 25°C per Fig. 2.
2. Mounted on 5 mm 2(0.13mm thick) land areas.
3. Measured on 8.3ms, single half sine-wave or equivalent square wave, duty cycle=4 pulses per minute maximum.
4. Peak pulse power waveform is 10/1000 S.
5. P.C.B. mounted with 0.2" X 0.2" (5 X 5 mm) copper pad areas.

BRSMBJ SeriesQ

Rev.B Jun.-2025



DATA SHEET

Type		Device Marking Ccode		Reverse Stand-off Voltage	Breakdown Voltage		Test Current	Max. Clamp Voltage	Peak Pulse Current	Maximum Reverse Leakage
					V _{BR} @ I _T					
					V _{RMW}	V _{in}	Max	I _T	V _C @ I _{PP}	
UNI	BI	UNI	BI	V	V	V	mA	V	A	uA
BRSMBJ5.0AQ		KEQ		5	5.4	7	10	9.2	65.3	800
BRSMBJ6.0AQ		KGQ		6	6.67	7.37	10	10.3	58.3	800
BRSMBJ6.5AQ	BRSMBJ6.5CAQ	KKQ	AKQ	6.5	6.22	7.98	10	11.2	53.6	500
BRSMBJ7.0AQ	BRSMBJ7.0CAQ	KMQ	AMQ	7	6.78	8.6	10	12.0	50.0	200
BRSMBJ7.5AQ	BRSMBJ7.5CAQ	KPQ	APQ	7.5	6.33	9.21	1	12.9	46.6	100
BRSMBJ8.0AQ	BRSMBJ8.0CAQ	KRQ	ARQ	8	6.89	9.83	1	13.6	44.2	50
BRSMBJ8.5AQ	BRSMBJ8.5CAQ	KTQ	ATQ	8.5	6.44	10.4	1	14.4	41.7	20
BRSMBJ9.0AQ	BRSMBJ9.0CAQ	KVQ	AVQ	9	6.0	11.1	1	15.4	39.0	10
BRSMBJ10AQ	BRSMBJ10CAQ	KXQ	AXQ	10	5.11	12.3	1	17.0	35.3	5
BRSMBJ11AQ	BRSMBJ11CAQ	KZQ	AZQ	11	4.22	13.5	1	18.2	33.0	1
BRSMBJ12AQ	BRSMBJ12CAQ	LEQ	BEQ	12	3.3	14.7	1	19.9	30.2	1
BRSMBJ13AQ	BRSMBJ13CAQ	LGQ	BGQ	13	2.44	15.9	1	21.5	28.0	1
BRSMBJ14AQ	BRSMBJ14CAQ	LKQ	BKQ	14	1.56	17.2	1	23.2	25.9	1
BRSMBJ15AQ	BRSMBJ15CAQ	LMQ	BMQ	15	0.67	18.5	1	24.4	24.6	1
BRSMBJ16AQ	BRSMBJ16CAQ	LPQ	BPQ	16	0.78	19.7	1	26.0	23.1	1
BRSMBJ17AQ	BRSMBJ17CAQ	LRQ	BRQ	17	0.89	20.9	1	27.6	21.8	1
BRSMBJ18AQ	BRSMBJ18CAQ	LTQ	BTQ	18	0.0	22.1	1	29.2	20.6	1
BRSMBJ20AQ	BRSMBJ20CAQ	LVQ	BVQ	20	0.22	24.5	1	32.4	18.6	1
BRSMBJ22AQ	BRSMBJ22CAQ	LXQ	BX							

BRSMBJ SeriesQ

Rev.B Jun.-2025



DATA SHEET

Type		Device Marking Ccode		Reverse Stand-off Voltage	Breakdown Voltage		Test Current	Max. Clamp Voltage	Peak Pulse Current	Maximum Reverse Leakage
					V _{BR} @ I _T					
					V _{RMW}	Min	Max	I _T	V _C @ I _{PP}	
UNI	BI	UNI	BI	V	V	V	mA	V	A	uA
BRSMBJ45AQ	BRSMBJ45CAQ	MVQ	CVQ	45	50	55.3	1	72.7	8.3	1
BRSMBJ48AQ	BRSMBJ48CAQ	MXQ	CXQ	48	53.3	58.9	1	77.4	7.8	1
BRSMBJ51AQ	BRSMBJ51CAQ	MZQ	CZQ	51	56.7	62.7	1	82.4	7.3	1
BRSMBJ54AQ	BRSMBJ54CAQ	NEQ	DEQ	54	60	66.3	1	87.1	6.9	1
BRSMBJ58AQ	BRSMBJ58CAQ	NGQ	DGQ	58	64.4	71.2	1	93.6	6.5	1
BRSMBJ60AQ	BRSMBJ60CAQ	NKQ	DKQ	60	66.7	73.7	1	96.8	6.2	1
BRSMBJ64AQ	BRSMBJ64CAQ	NMQ	DMQ	64	71.1	78.6	1	103.0	5.9	1
BRSMBJ70AQ	BRSMBJ70CAQ	NPQ	DPQ	70	77.8	86	1	113.0		

/ Electrical Characteristic Curve

Fig. 1 Peak Pulse Power Rating Curve

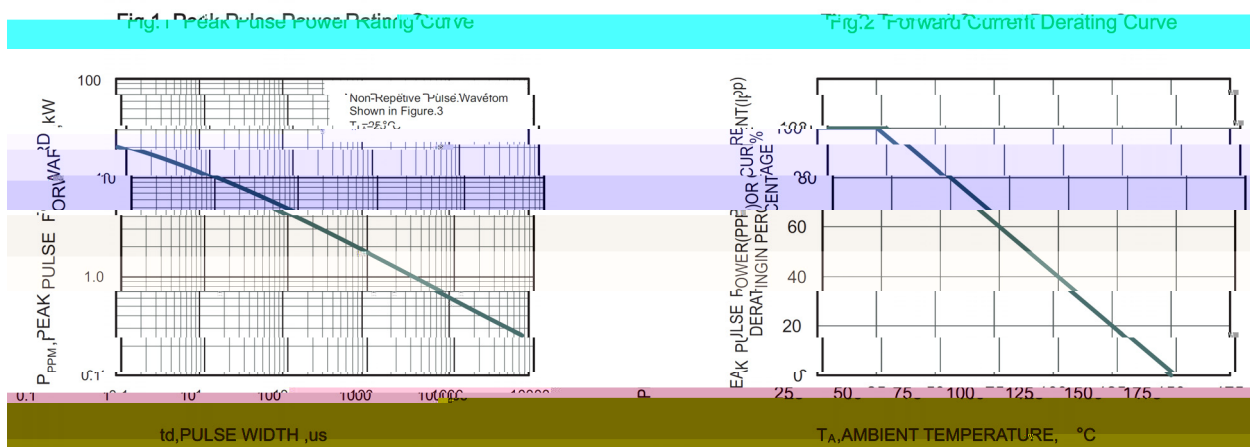


Fig.2 Forward Current Derating Curve

Fig.3 Pulse Waveform


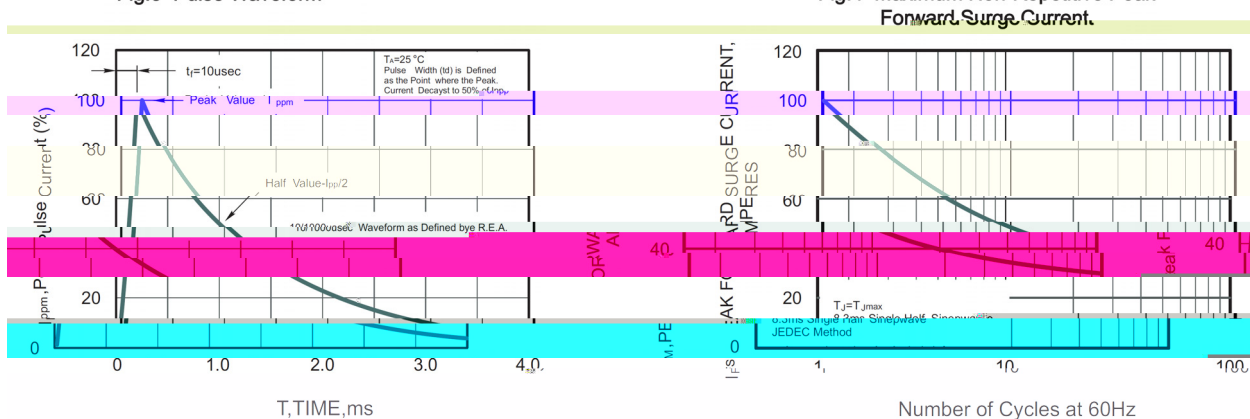


Fig.4 Maximum Non-Repetitive Peak Forward Surge Current.

/ Package Dimensions

SMB

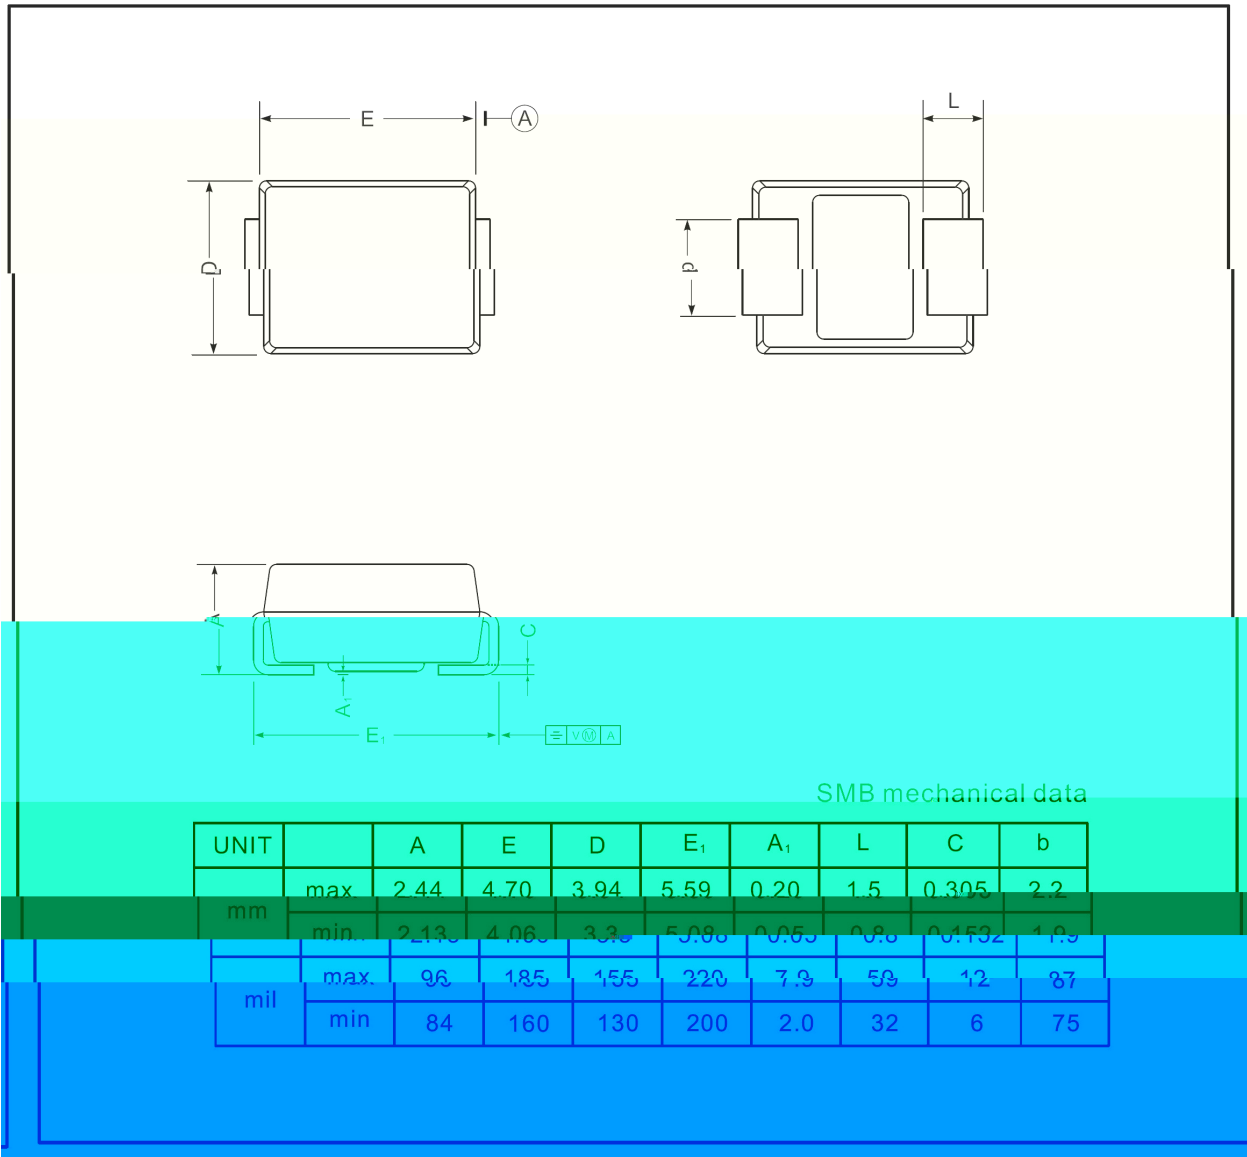

BRSMBJ SeriesQ

Rev.B Jun.-2025



DATA SHEET



/ Marking Instructions



AK

Q

Note:

AK Product Type Code

Q: Automobile halogen-free product Code

**** Lot No. Code, code change with Lot No.

