

BZX84BXXX



DATA SHEET

/ Descriptions

SOT-23


/ Features

300mW



/ Applications

2.4V-39V

/ Equivalent Circuit



/ Pinning

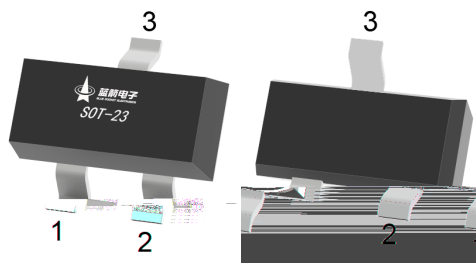

| Dimensions | Value (in mm) |
|------------|---------------|
| C          | 2.0           |
| X          | 0.8           |
| X1         | 1.35          |
| Y          | 0.9           |
| Y1         | 2.9           |

/ Marking





## / Electrical Characteristics(Ta=25 )

[illegible]

/ Electrical Characteristics(Ta=25 )


|  |  |  |  |  |  | Ω |  |  |  |  |
|--|--|--|--|--|--|---|--|--|--|--|
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |
|  |  |  |  |  |  |   |  |  |  |  |

/ Electrical Characteristic Curve

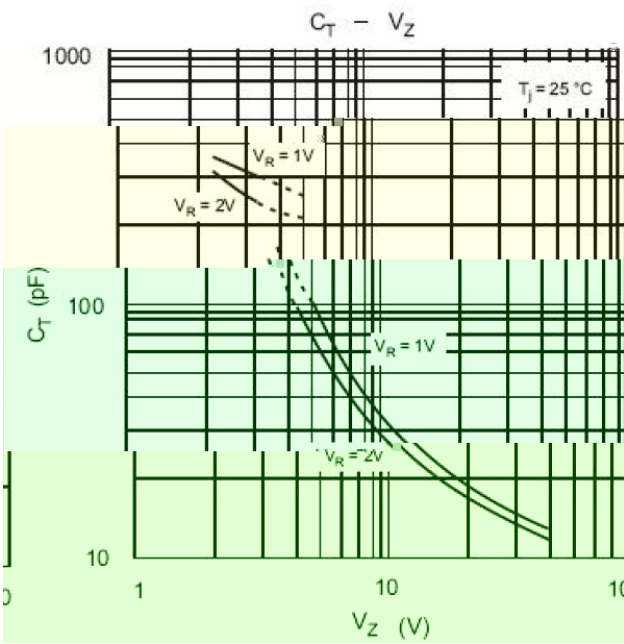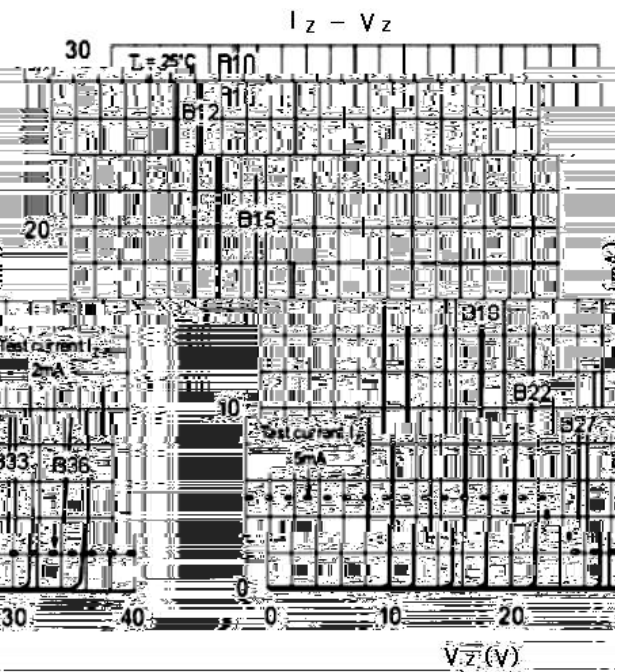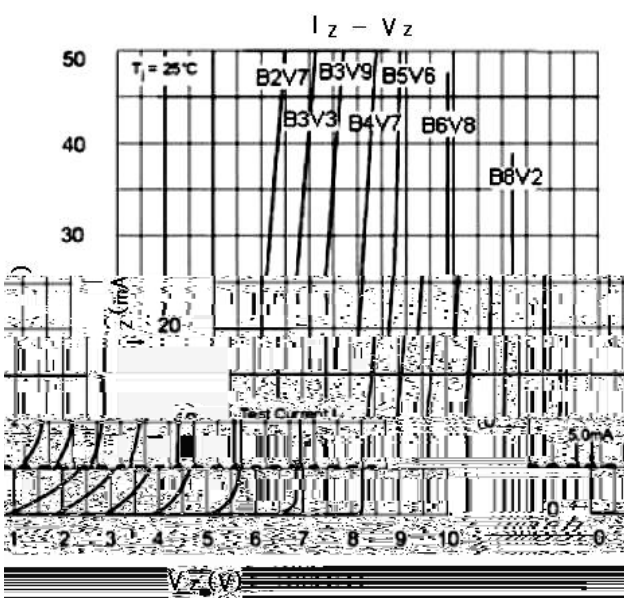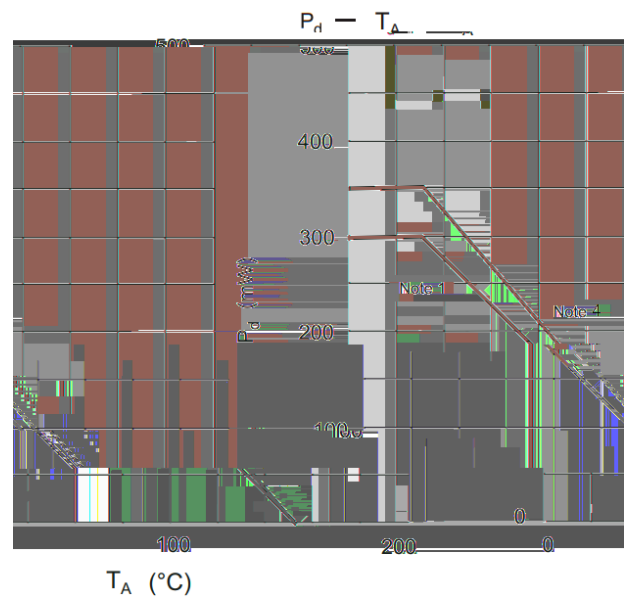



/ Marking Instructions

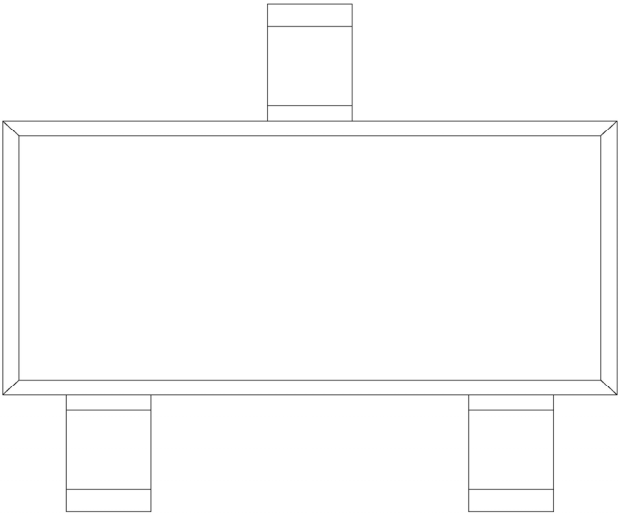

H  
BV

(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

|  |
|--|
|  |
|  |
|  |
|  |
|  |
|  |
|  |