

50V~600V


2.0A

RoHS

2011/65/EU




1



2


PIN	DESCRIPTION
1	Cathode
2	Anode

ended mounting pad size The recomme

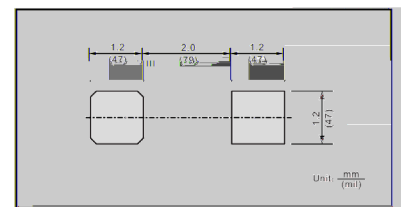



SOD-123FL

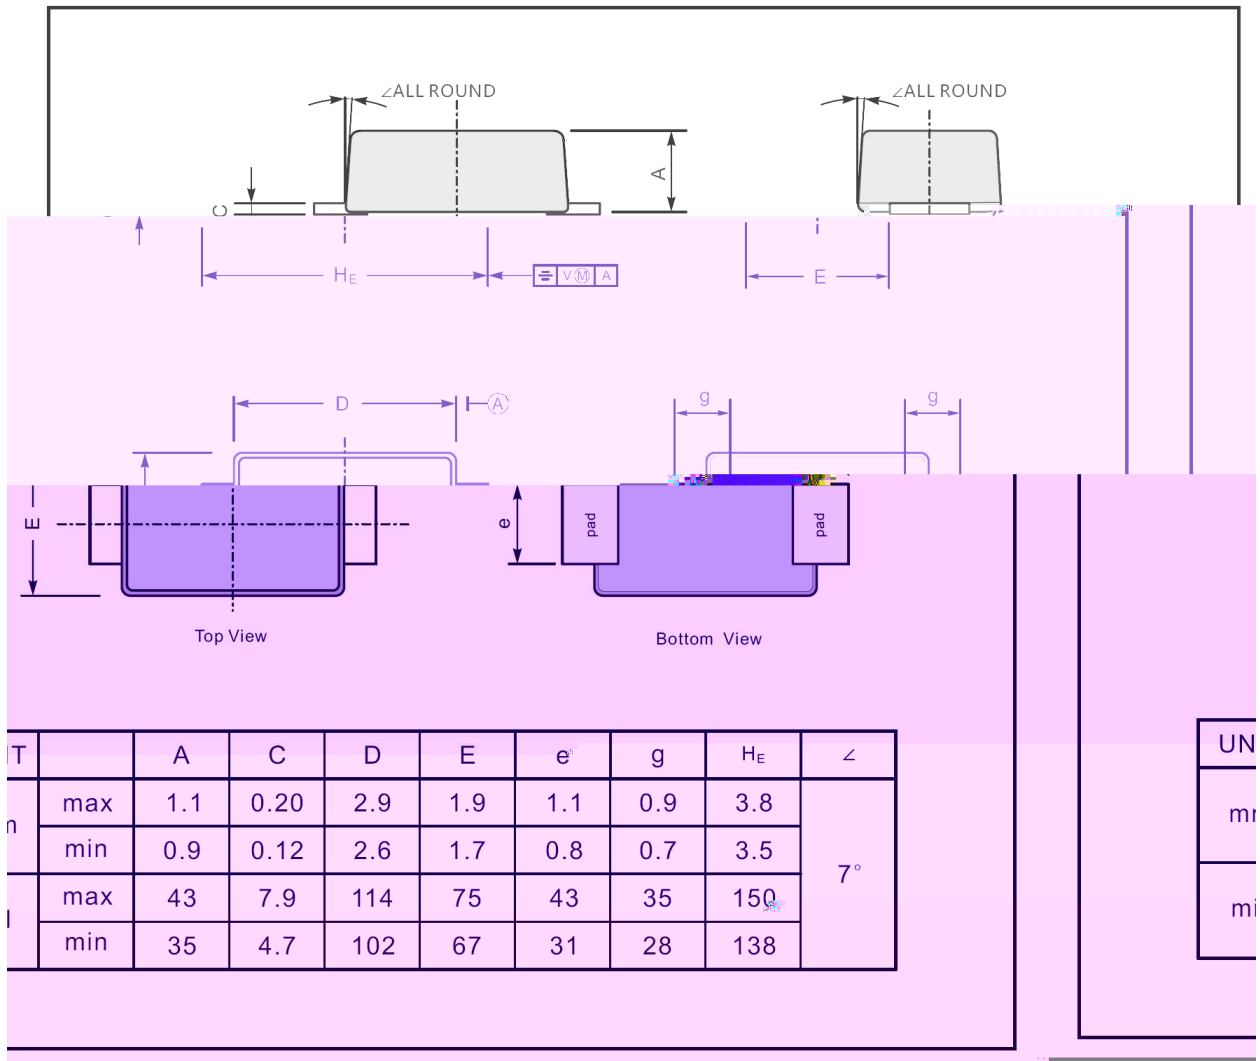


UNIT

mm

mil

Marking

Type number	Marking code
ES2AW	E2L
ES2BW	
ES2CW	
ES2DW	
ES2EW	E2M
ES2GW	
ES2JW	E2H

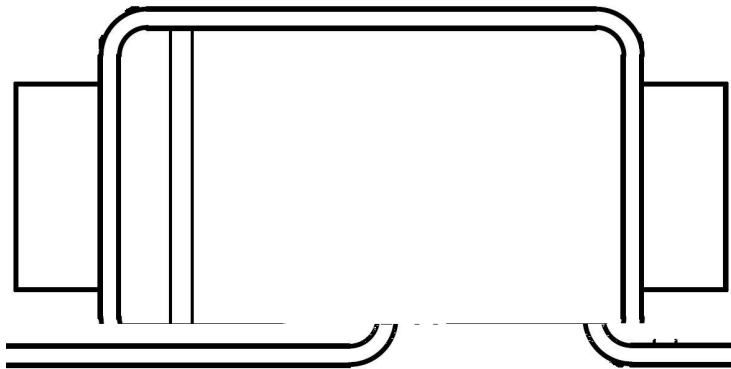

E2L

1 *


3 *

E2L

*

*

Temperature Profile for IR Reflow Soldering(Pb-Free)

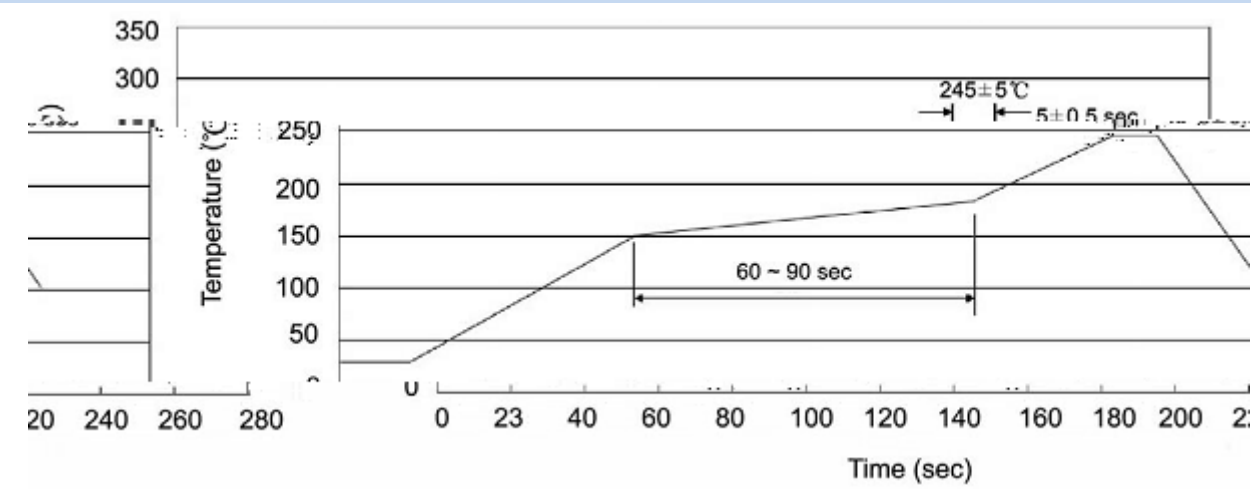

± ± ± ±

± ± ± ±

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱