

[illegible]



/ Descriptions

/ Features

, 0

/ Applications

/ Equivalent Circuit




/ Pinning



PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

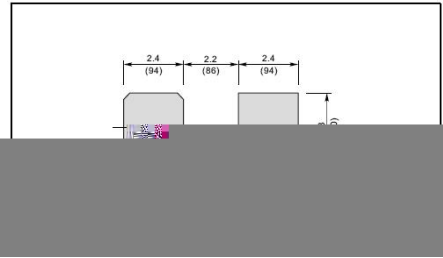

/ Marking




ES2KB




/ Package Dimensions

SMB

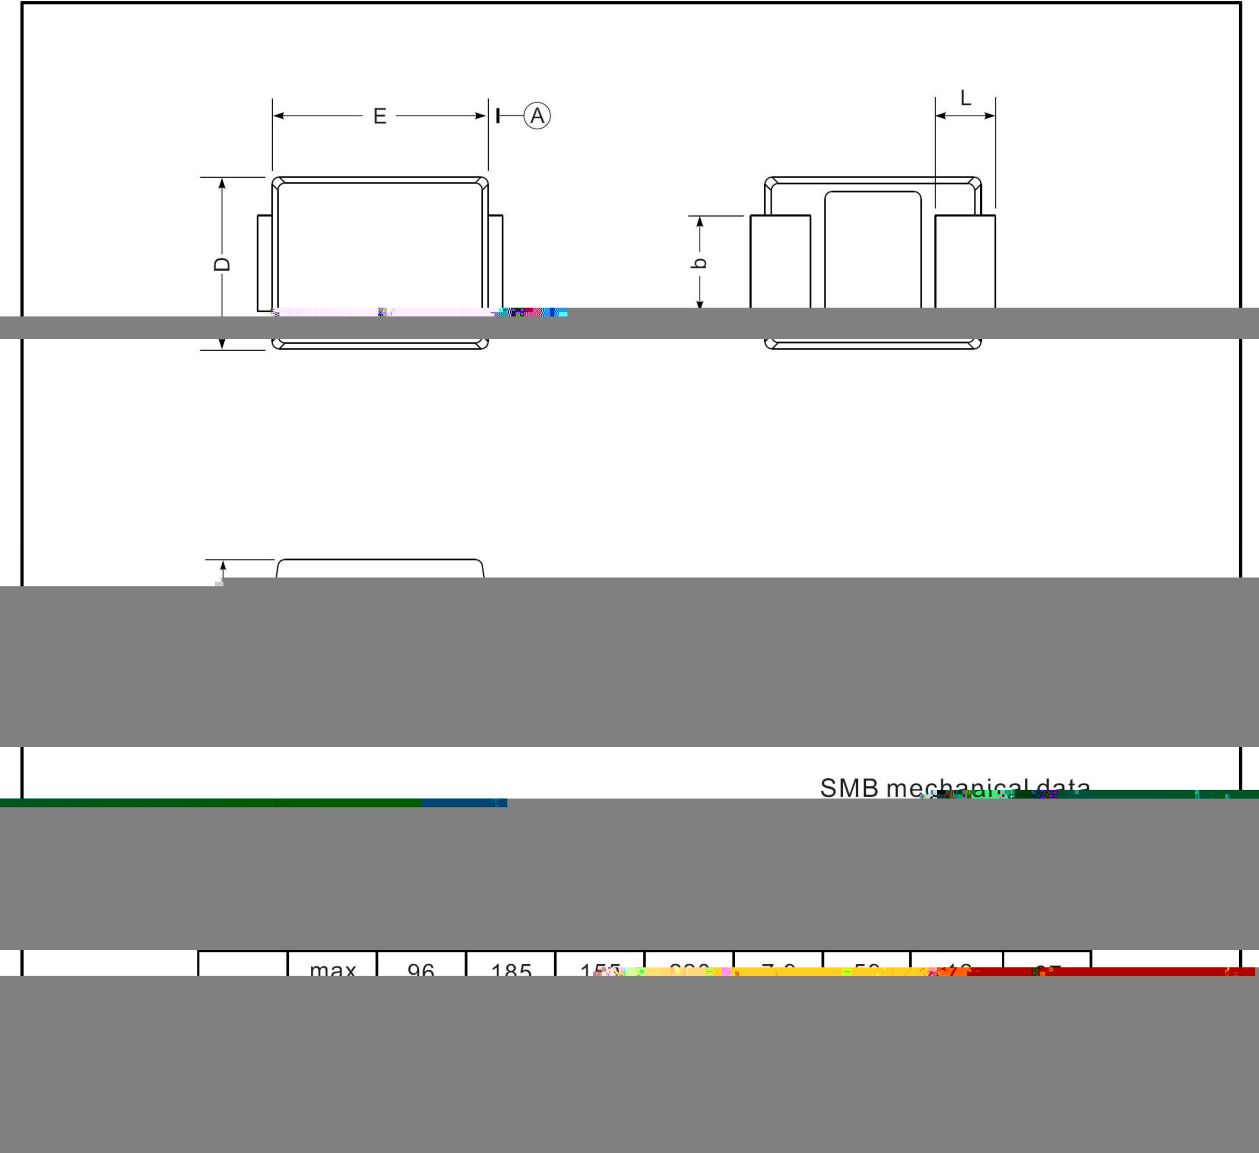

/ Marking Instructions

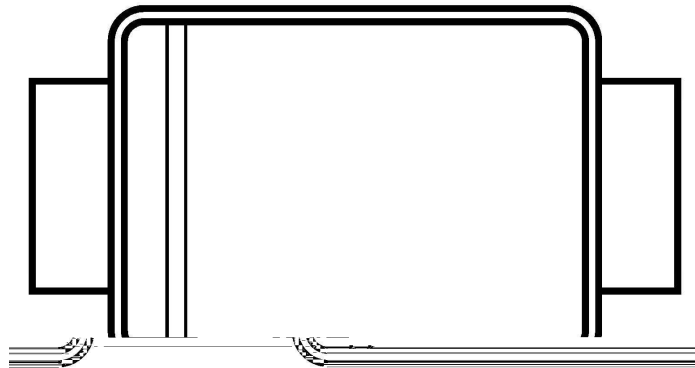

ES2K


1

3

ES2K



() /

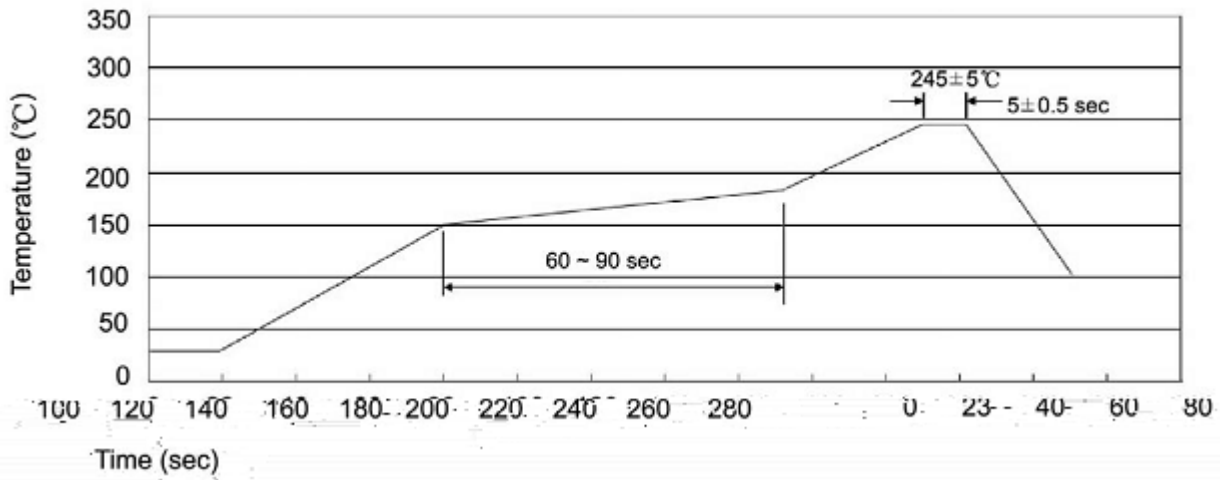

±

±

±

±

/ Resistance to Soldering Heat Test Conditions

±

±

±

±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						"		

/ Notices