




100V~1000V

2.0A



PIN	DESCRIPTION
1	Input Pin (~)
2	Input Pin (~)
3	Output Anode (+)
4	Output Cathode (-)

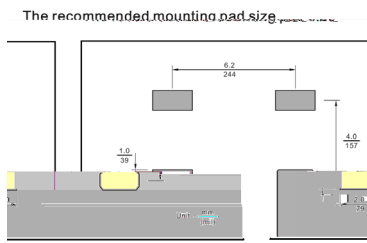

--	--	--	--

Fig.1 Average Rectified Output Current Derating Curve


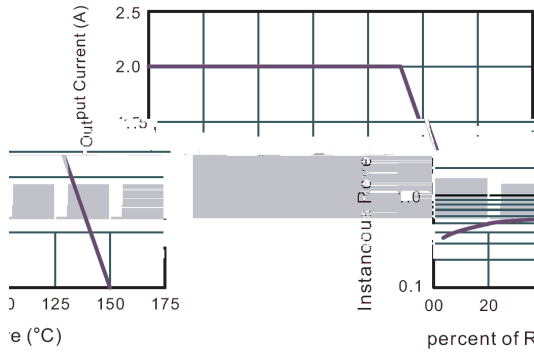


Fig.2 Typical Reverse Characteristics

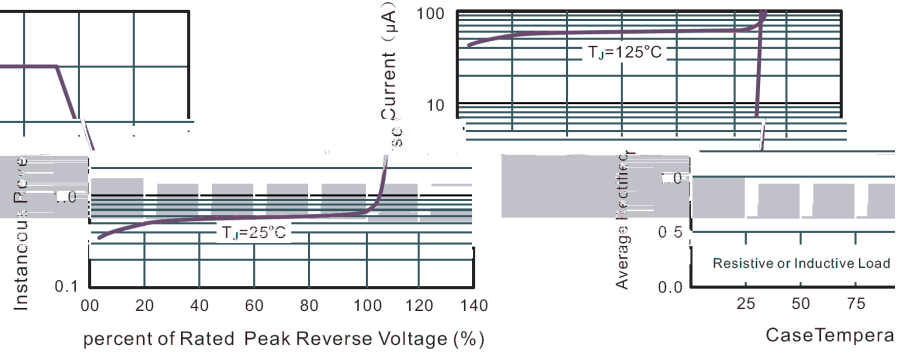

Forward

Fig.4 Typical Junction Capacitance

Fig.3 Typical Instantaneous Forward Current



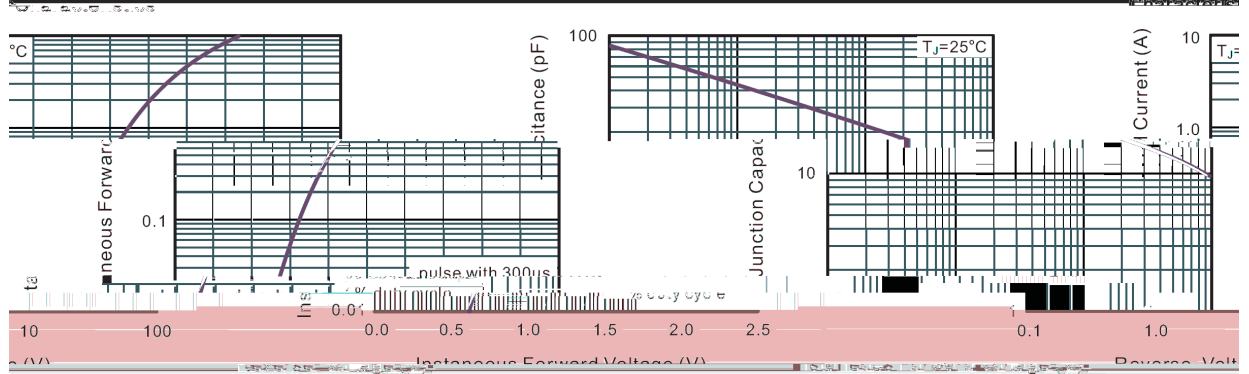



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

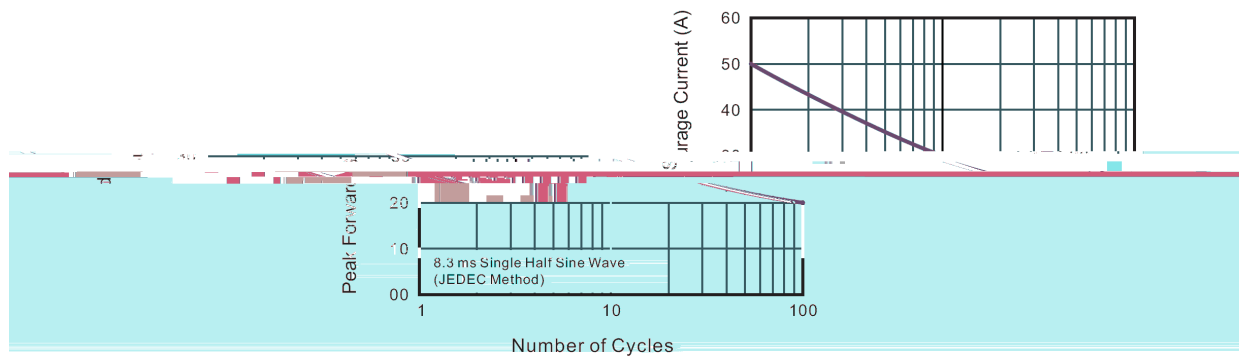



ABS/LBF

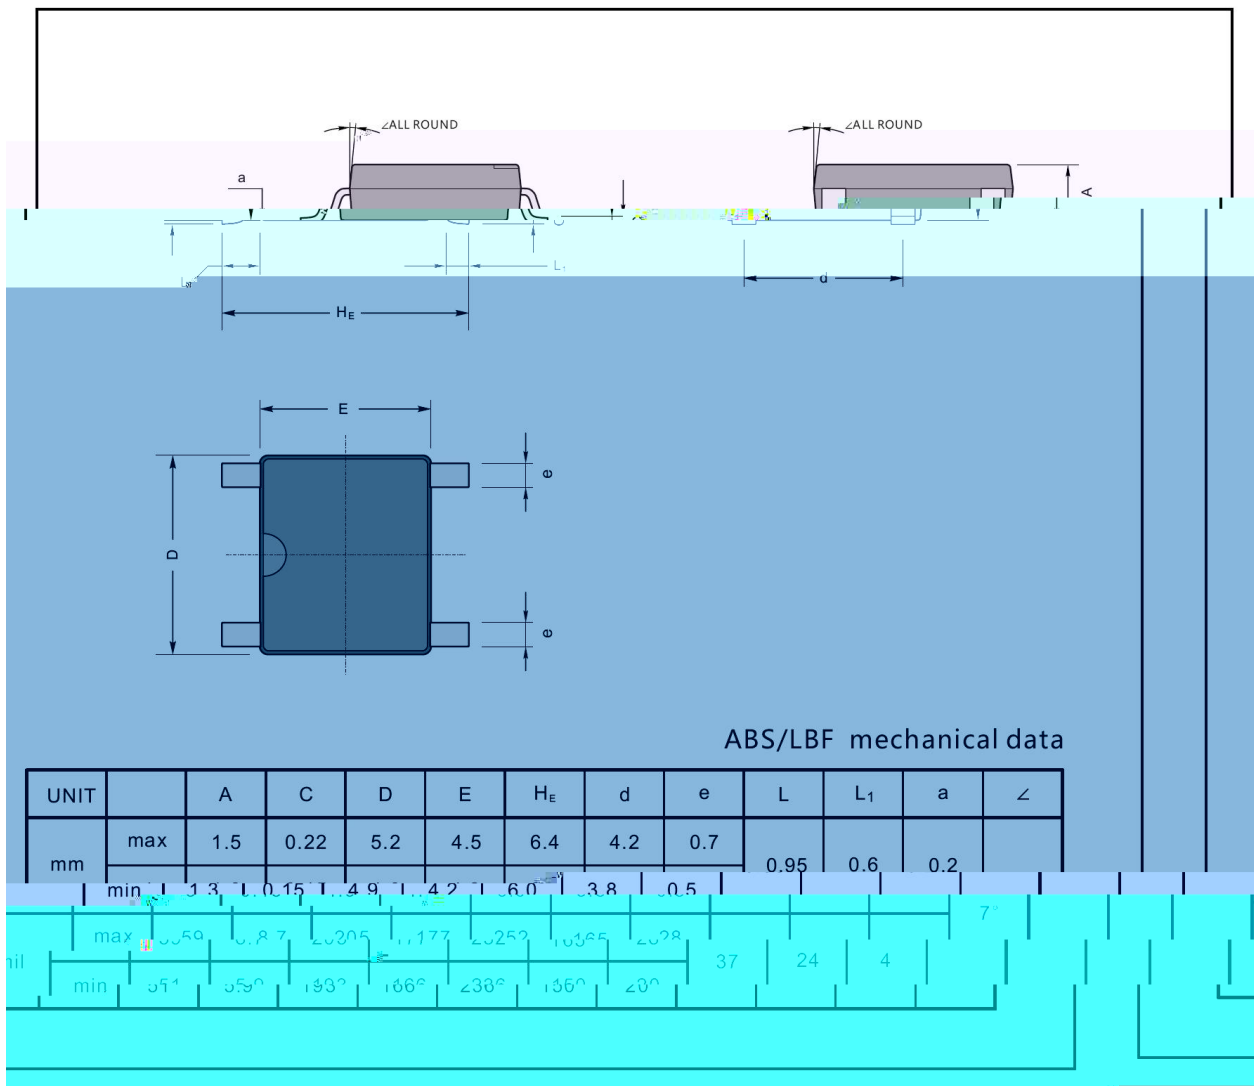

Marking

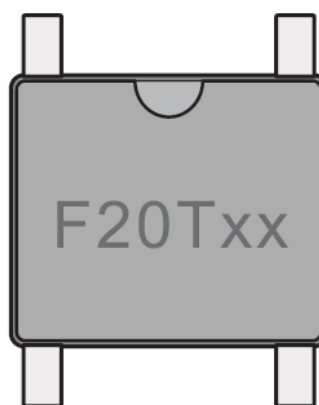Type number		Marking code
0	FTB1S-20	F20T1
	FTB2S-20	F20T2
	FTB4S-20	F20T4
	FTB6S-20	F20T6
	FTB8S-20	F20T8
	FTB10S-20	F20T1
		 F20Txx

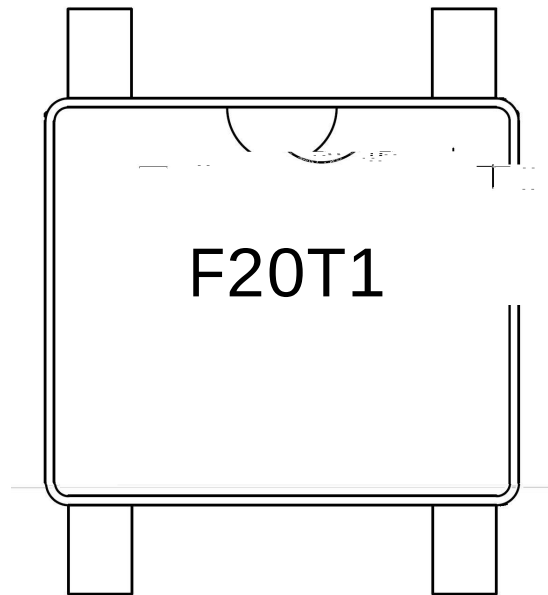

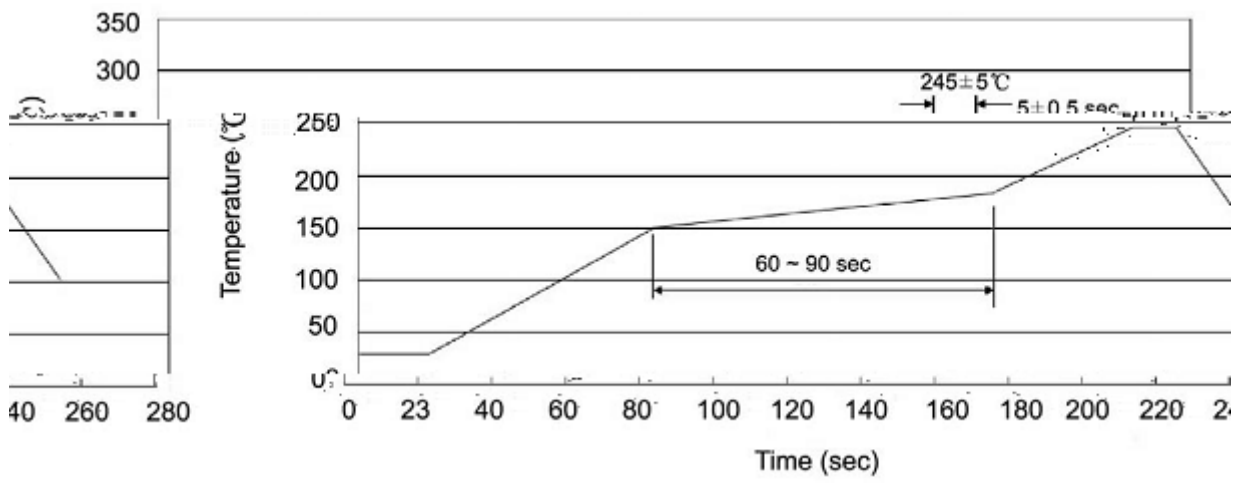

± ± ± ±



± ± ± ±



	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
ABS/LBF								

