

/ Descriptions


TO-92 NPN Silicon NPN transistor in a TO-92 Plastic Package.

/ Features

VHF/UHF
VHF/UHF Transistor.

/ Applications

VHF/UHF amplifier applications.

/ Equivalent Circuit**/ Pinning**

PIN1 Collector PIN 2 Emitter PIN 3 Base

/ hFE Classifications & Marking

See Marking Instructions.




/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	30	V
Collector to Emitter Voltage	V_{CEO}	25	V
Emitter to Base Voltage	V_{EBO}	3.0	V
Collector Current - Continuous	I_C	50	mA
Collector Power Dissipation	P_C	350	mW
Collector Power Dissipation	$P_C(T_c=25)$	1.0	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 150	

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C=100\mu A$ $I_E=0$	30			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=1.0mA$ $I_B=0$	25			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E=10\mu A$ $I_C=0$	3.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=25V$ $I_E=0$			0.1	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=2.0V$ $I_C=0$			0.1	μA
DC Current Gain	h_{FE}	$V_{CE}=10V$ $I_C=4.0mA$	60			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=4.0mA$ $I_B=0.4mA$			0.5	V
Base to Emitter On Voltage	$V_{BE(on)}$	$V_{CE}=10V$ $I_C=4.0mA$			0.95	V
Transition Frequency	f_T	$V_{CE}=10V$ $I_C=4.0mA$ $f=100MHz$	650			MHz
Collector Output Capacitance	C_{ob}	$V_{CB}=10V$ $I_E=0$ $f=1.0MHz$			0.7	pF
Collector Base Feedback Capacitance	C_{rb}	$V_{CB}=10V$ $I_E=0$ $f=1.0MHz$	0.35		0.65	pF
Collector- Base Time Constant	$C_{c.rbb'}$	$V_{CB}=10V$ $I_C=4.0mA$ $f=31.8MHz$			9.0	pS


/ Electrical Characteristic Curve

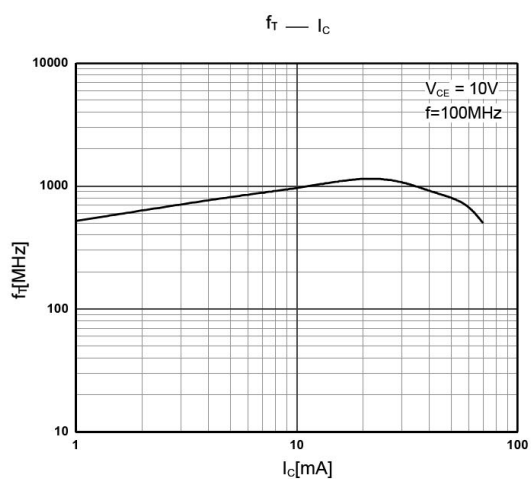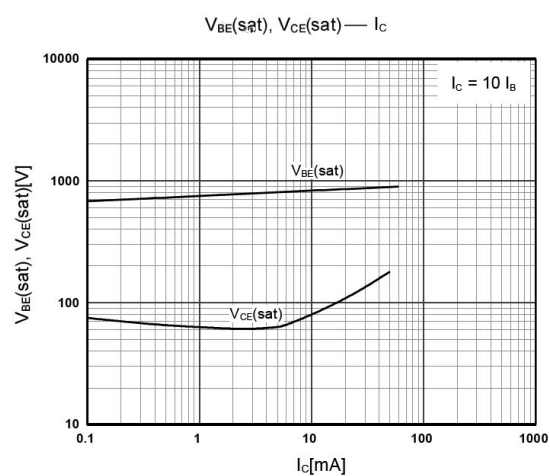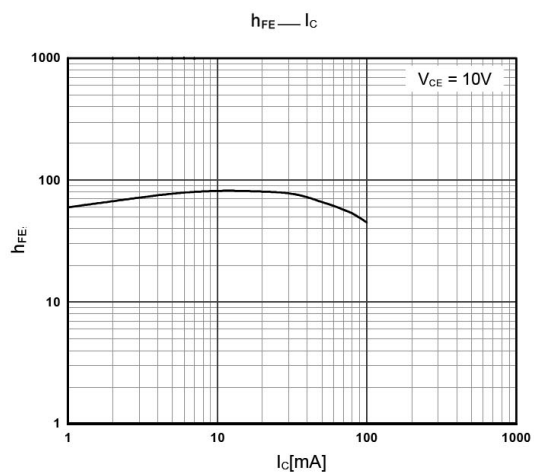


/ Package Dimensions

T0-92

Unit: mm

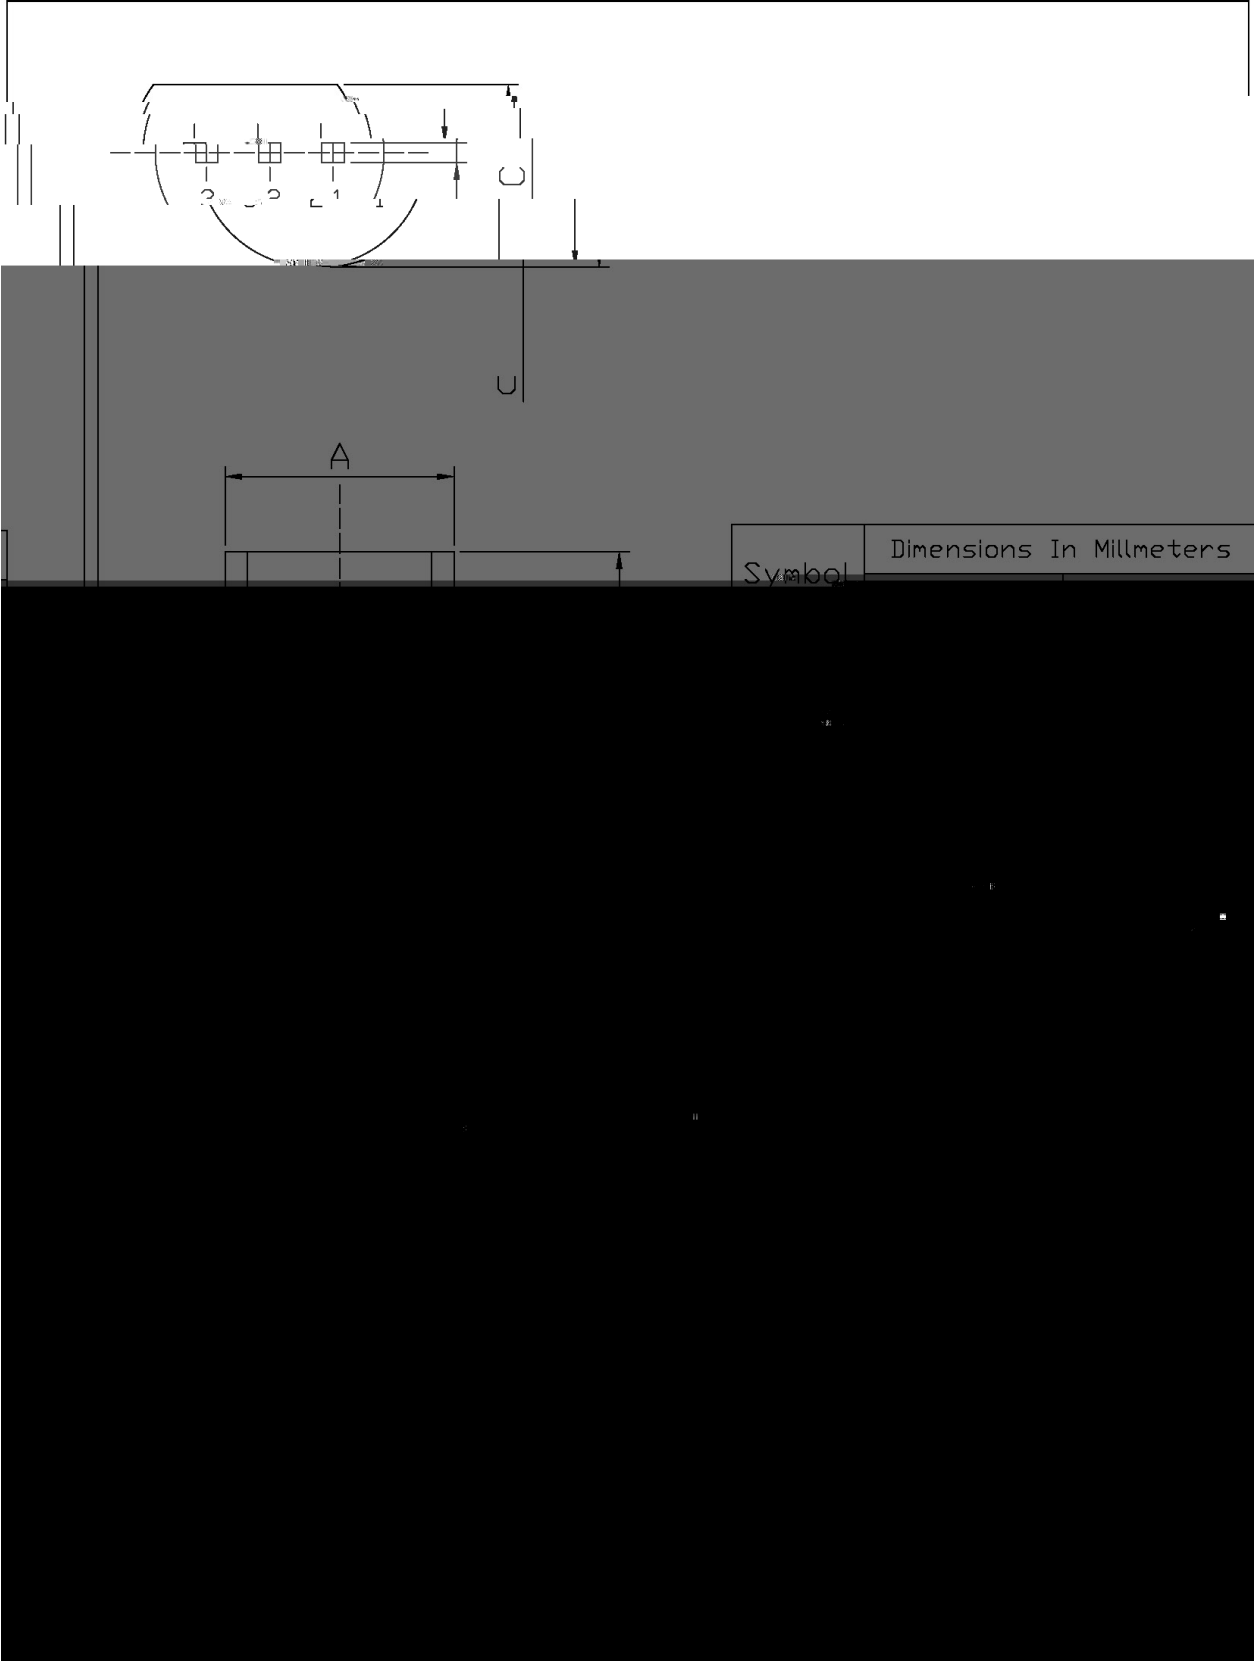

/ Marking Instructions

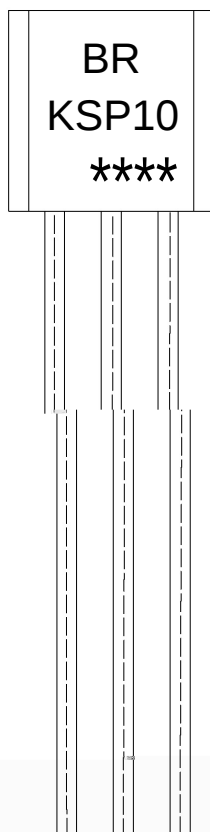

BR:

KSP10


Note:

BR: Company Code.

KSP10: Product Type.

****: Lot No. Code,code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

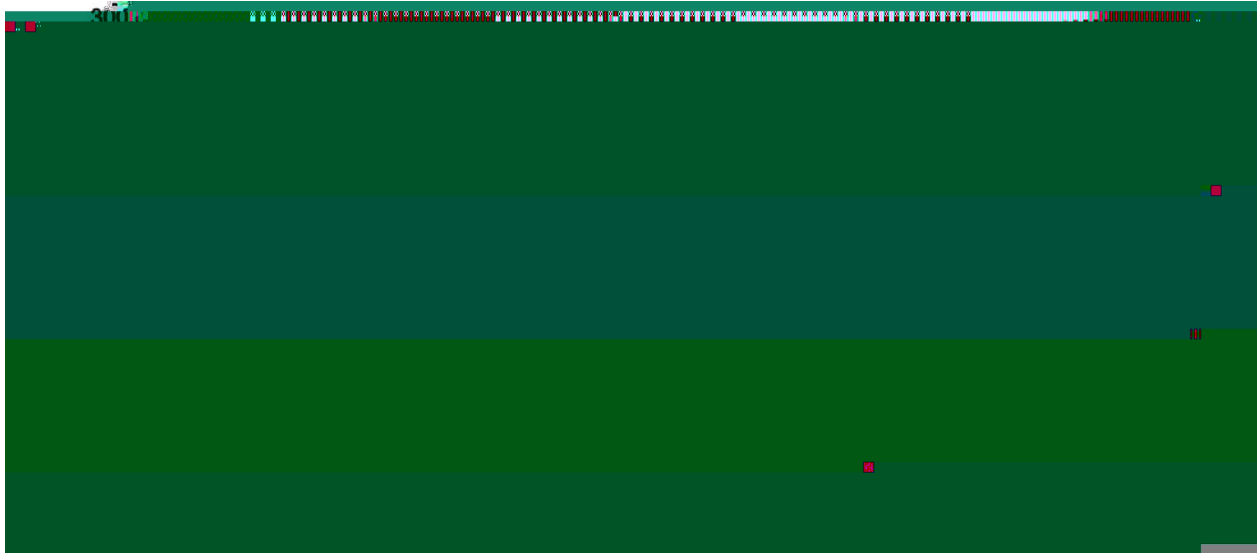

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

/ AMMO

Package Type 封装形式	Units 包装数量			Dimension 包装尺寸 (unit: mm3)
	Units/tape 只/纸带	Tape/Inner Box 纸带/盒	Rows/Inner Box 纸带	