

/ Descriptions



TO-252 NPN Silicon NPN transistor in a TO-252 Plastic Package.

/ Features

， KTA1040D
Low $V_{CE(sat)}$, complementary to KTA1040D.

/ Applications

General purpose amplifier for surface mount applications.


/ Equivalent Circuit**/ Pinning**

PIN1 Base PIN 2,4 Collector PIN 3 Emitter


/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	Y	GR
h_{FE} Range	100` 200	150` 300


/ Electrical Characteristic Curve

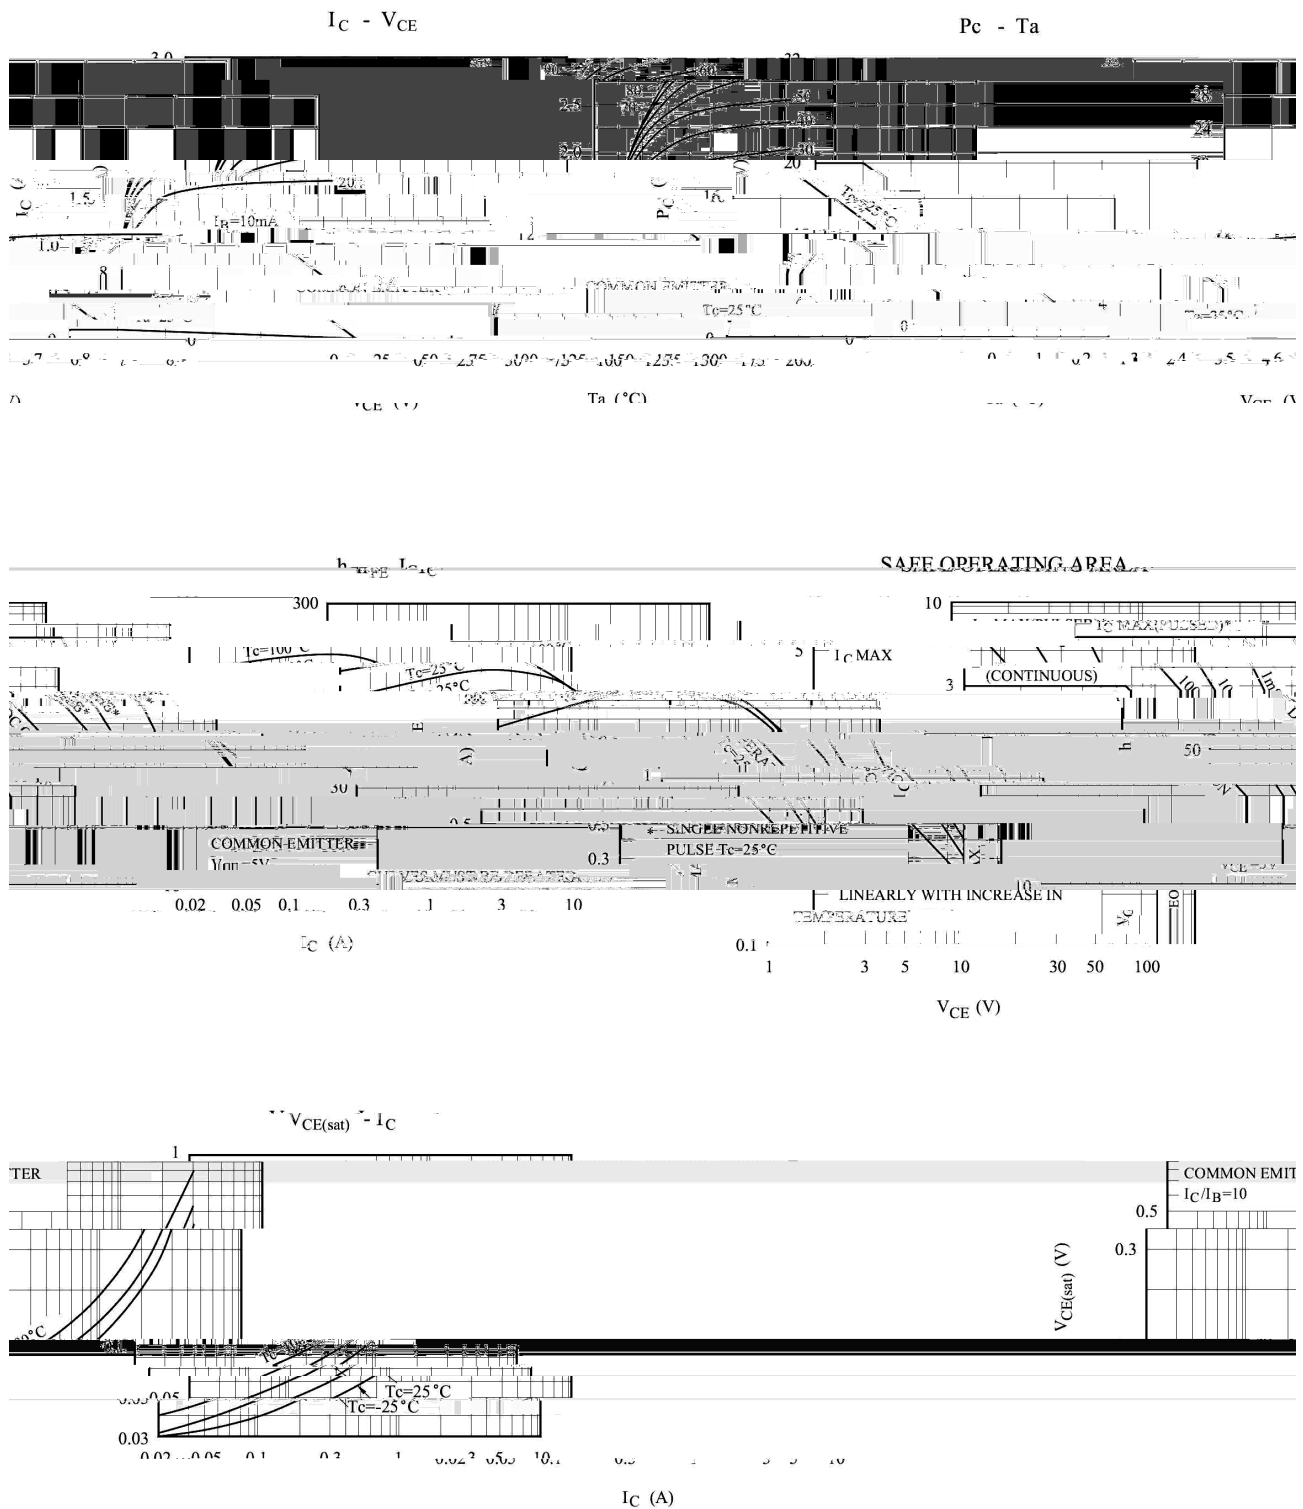

/ Package Dimensions

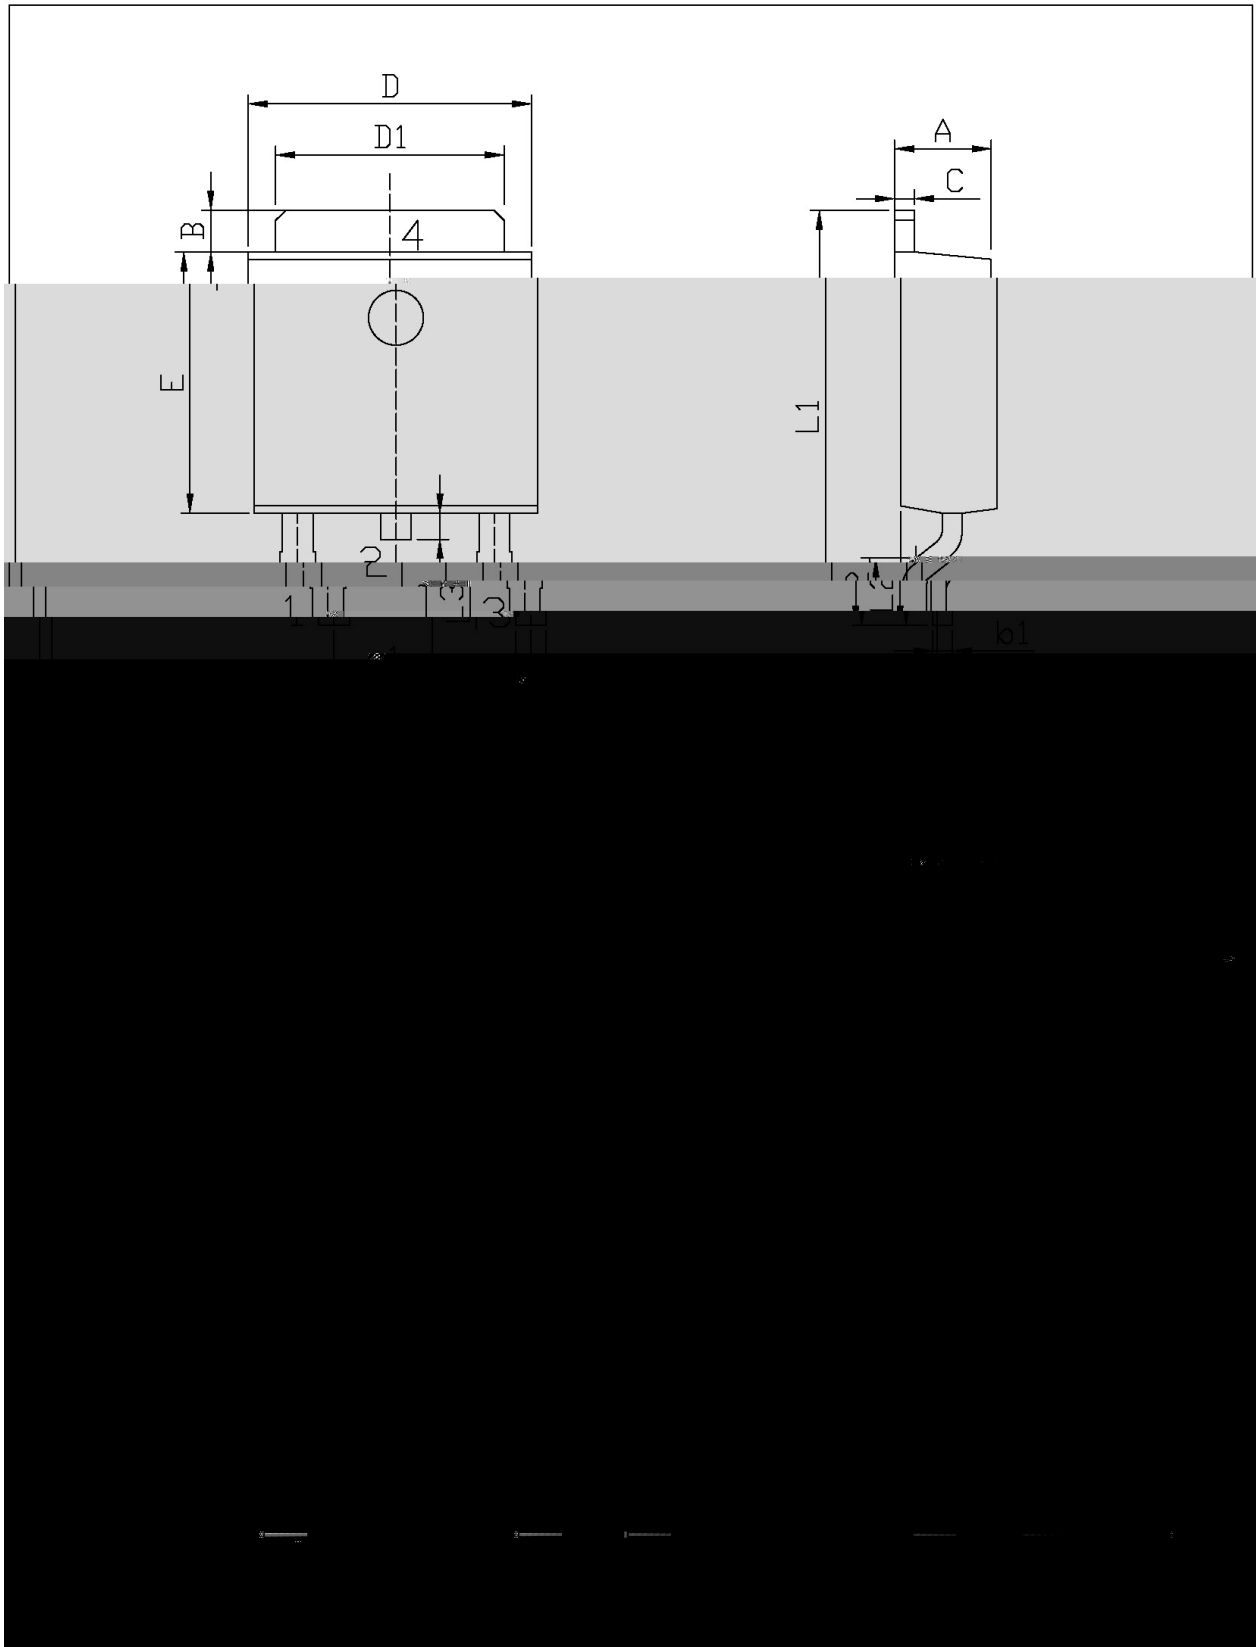

/ Marking Instructions

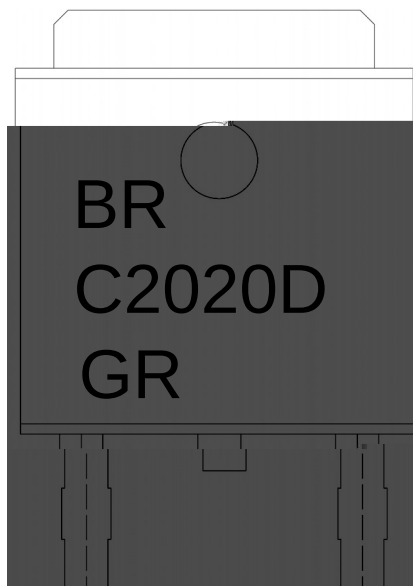

BR

C2020D

GR

h_{FE}

Note:


BR: Company Code

C2020D: Product Type.

GR: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

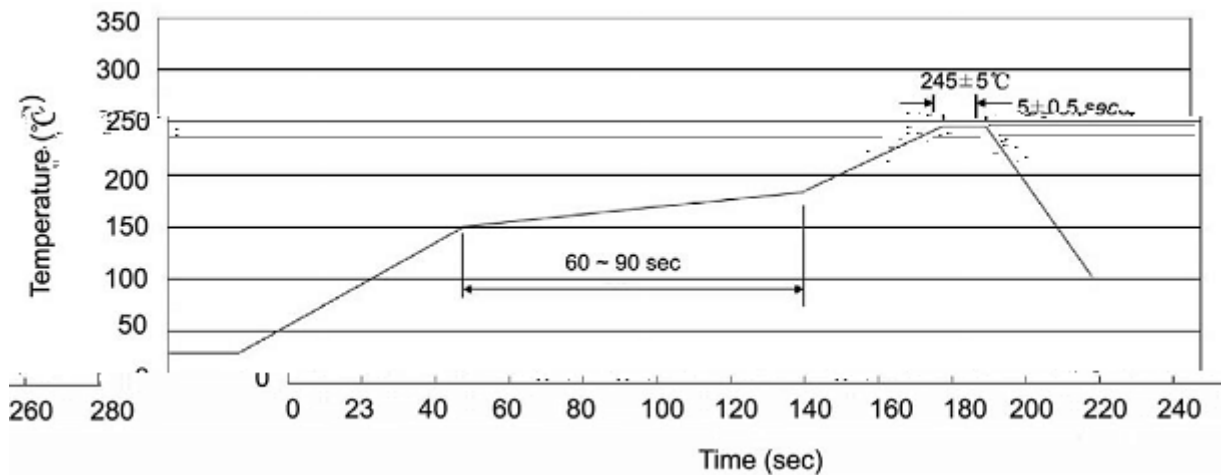

Note:

- | | | | | | |
|---|-------|-----|-----------|---|--------------------------------------|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245±5 | | 5±0.5sec; | 2.Peak Temp.:245±5 , Duration:5±0.5sec. | |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						ρ		

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices