

/ Descriptions


TO-92 NPN

/ Features

KTA1270

/ Applications

/ Equivalent Circuit



/ Pinning





/ hFE Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)


						μ
						μ

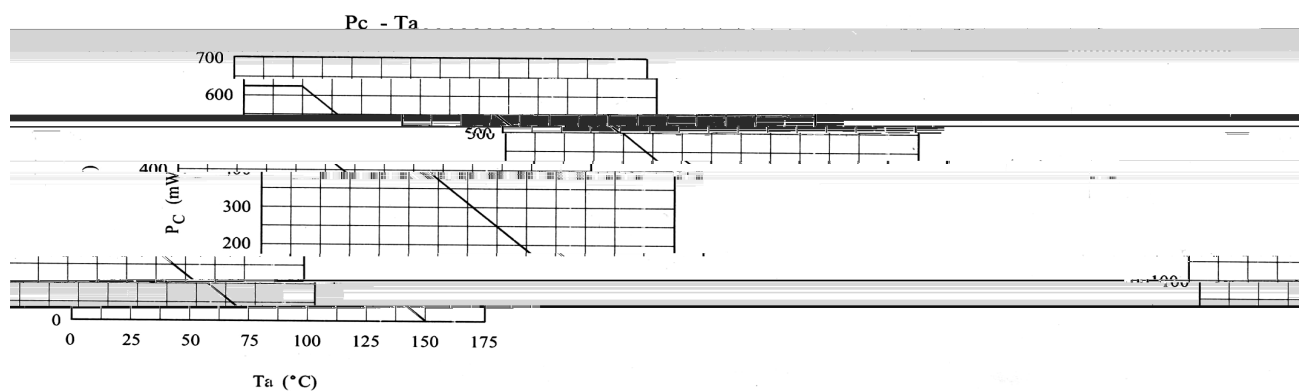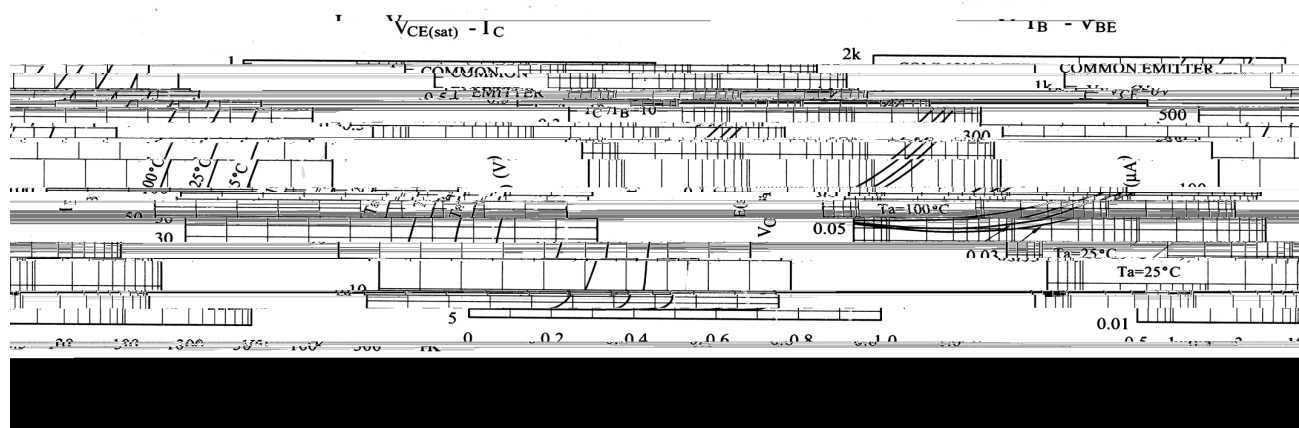


/ Package Dimensions

TO-92


Unit: mm

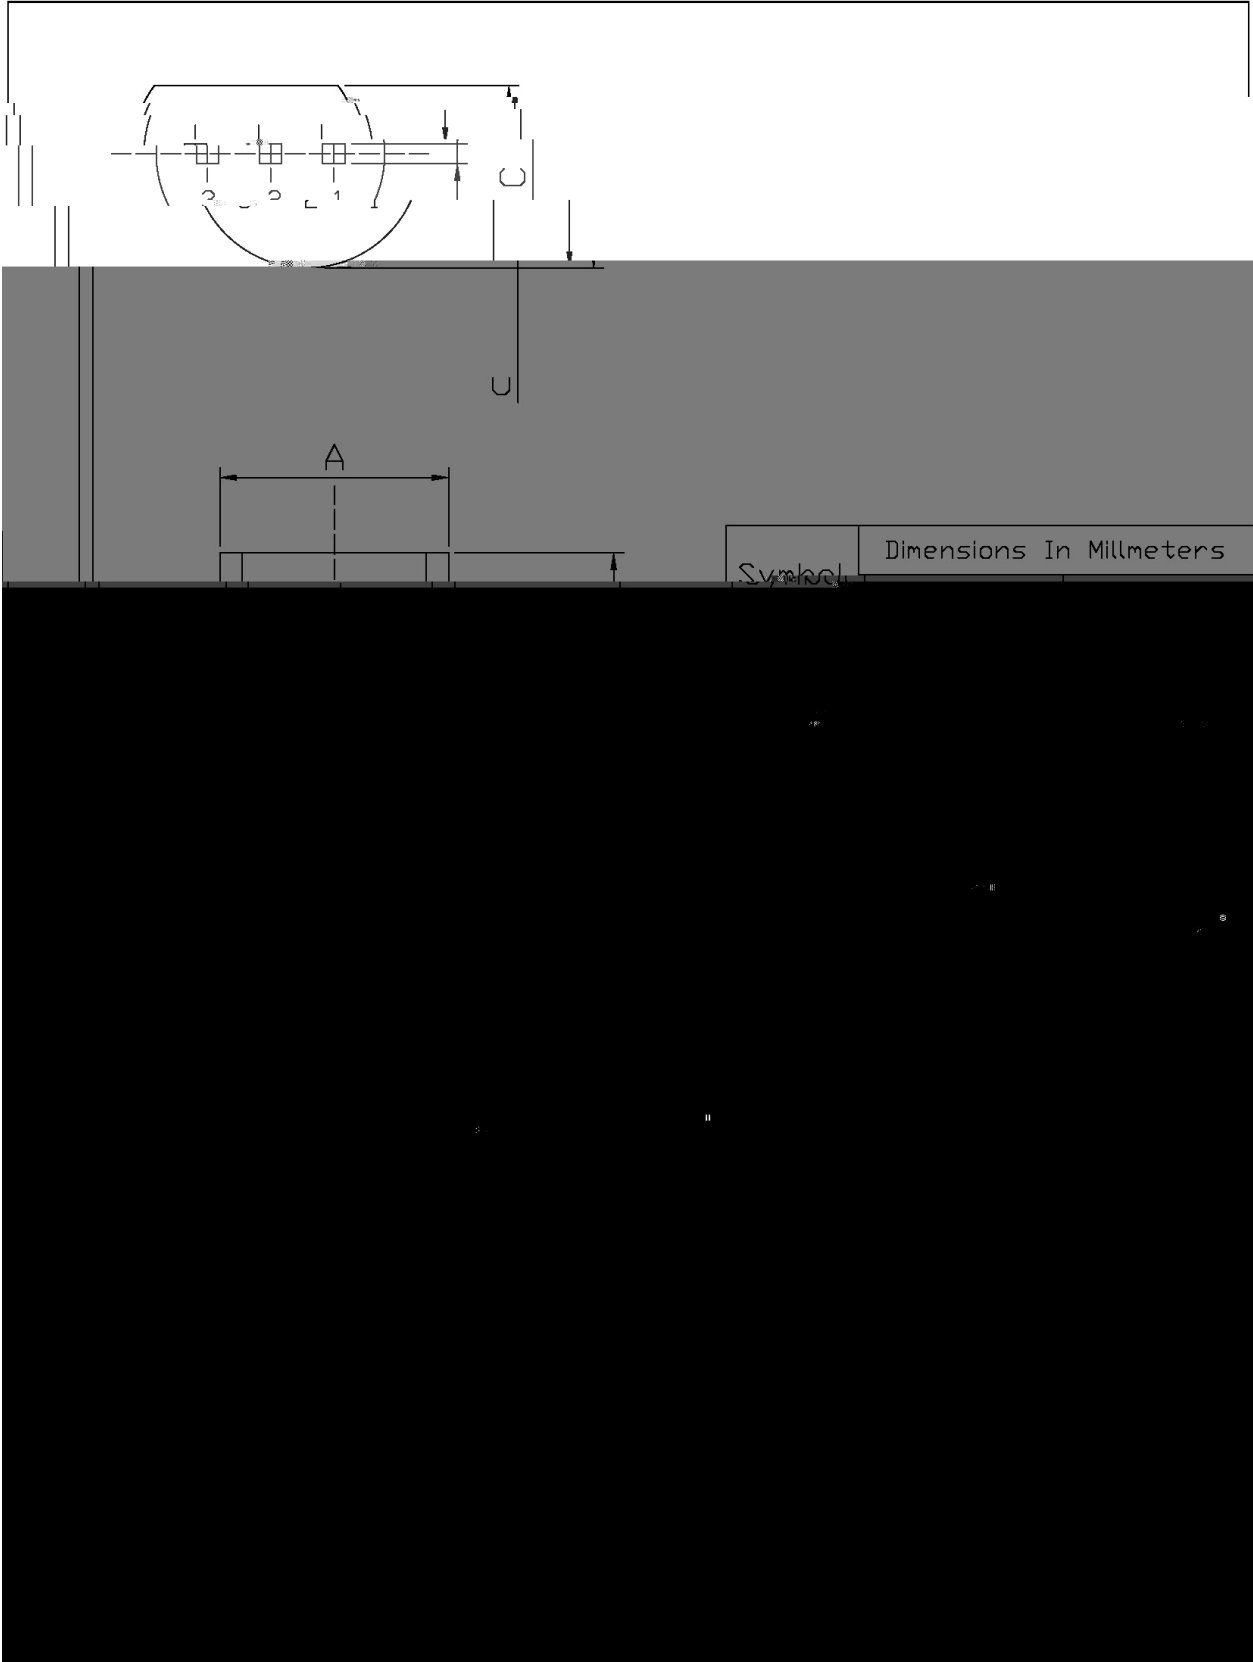

/ Marking Instructions

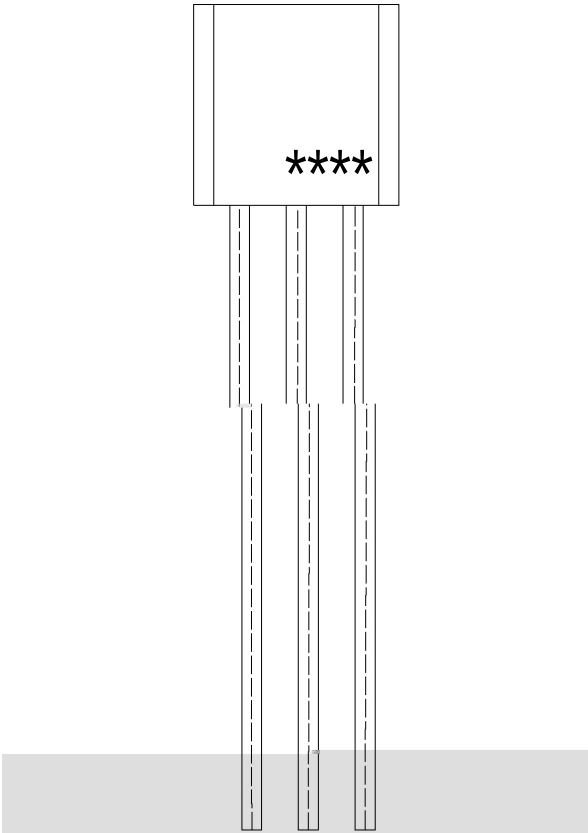

BR:
C3202
O:

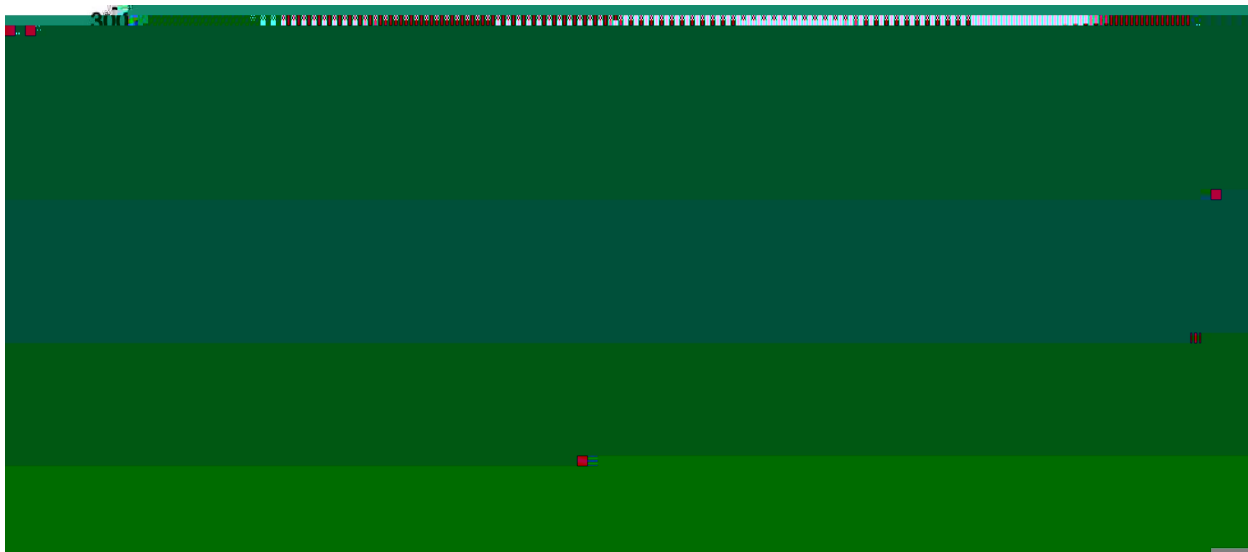 $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

封装形式	包装数量		包装尺寸
	Units/tape 只/纸带	Tape/Inner Box 纸带/盒	