


KTC3205T



/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

/ Package Dimensions


SOT-89

单位: mm

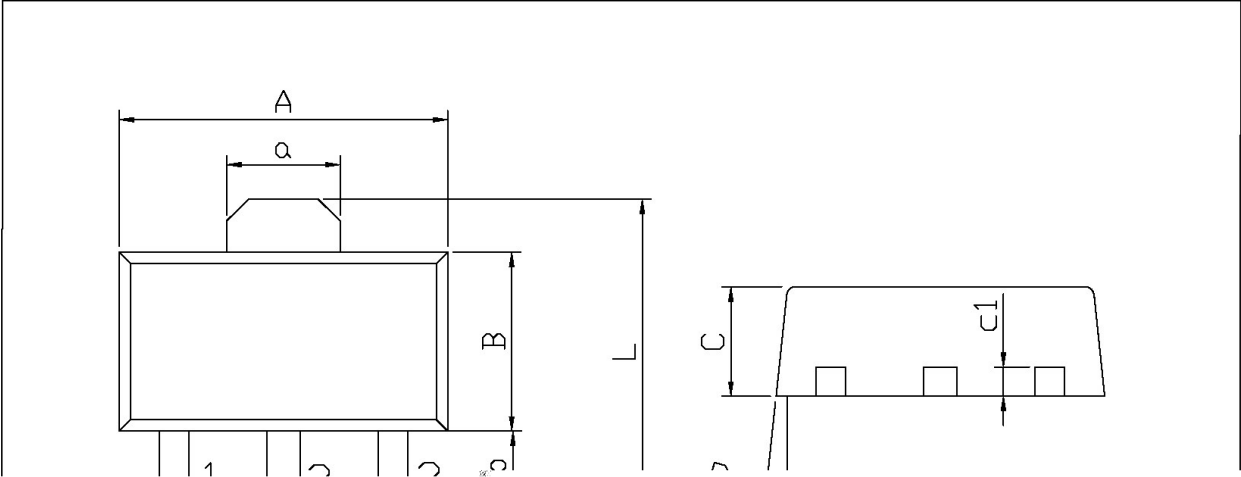


	B	2.35	2.65	a2	0.30	0.50
	L	3.878	4.478	C	1.40	1.70
	a	1.45	1.65	c1	0.35	0.50
	E	1.40	1.60	P	6°	
	P1	0.05				

/ Marking Instructions

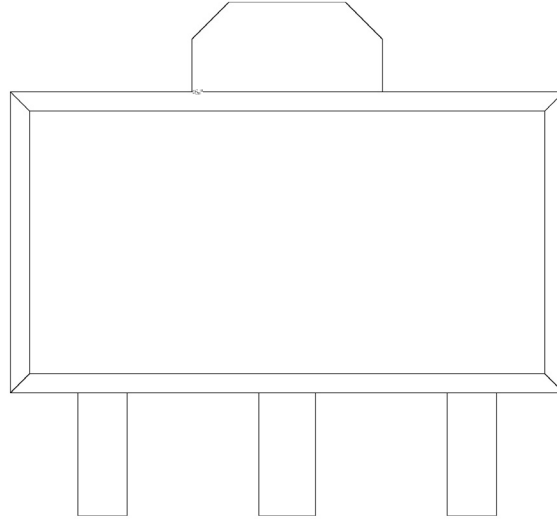

**

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

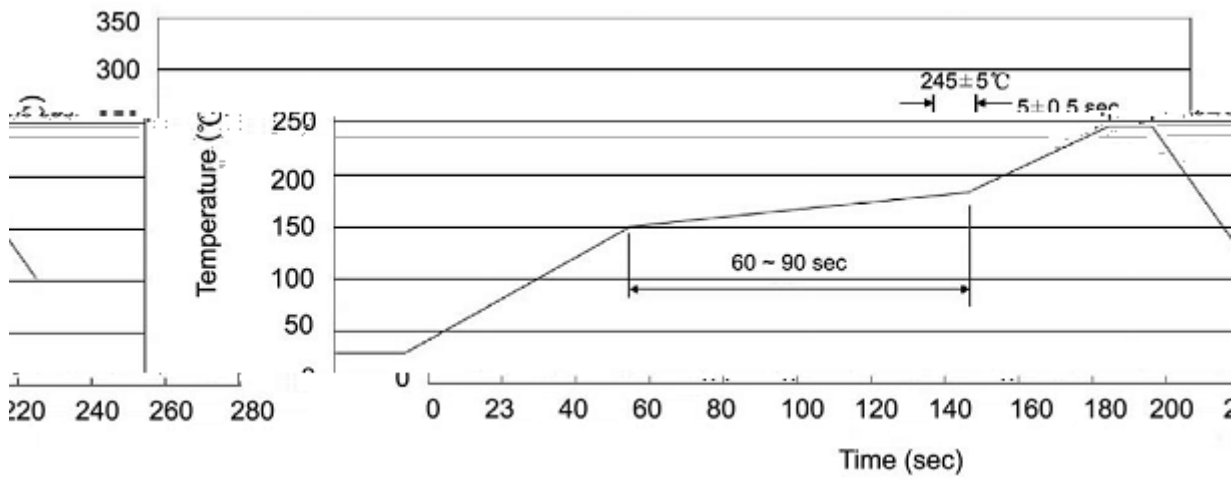

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-89	1,000	7	7,000	8	56,000	7 ×12	180×120×180	385×257×392

/ Notices