


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

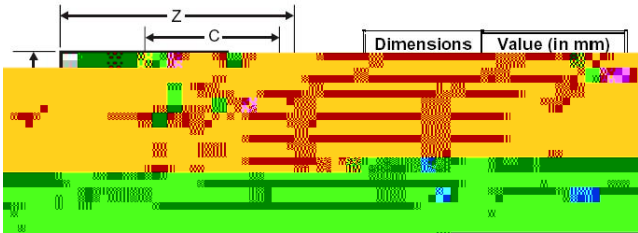




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

- /
1. FR-4 PCB 2
2. /


/ Electrical Characteristic Curve

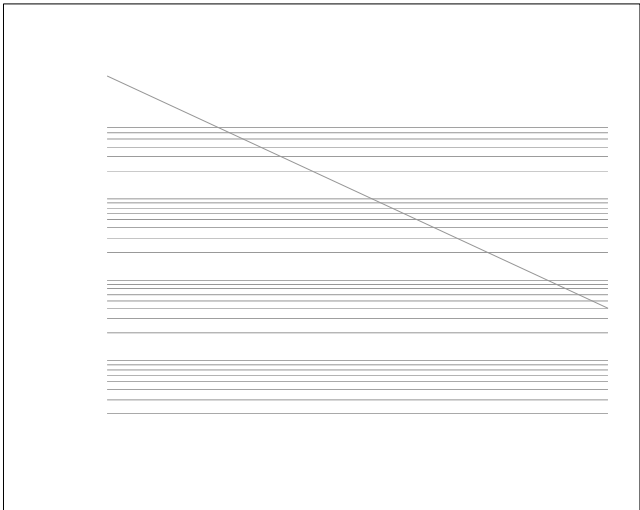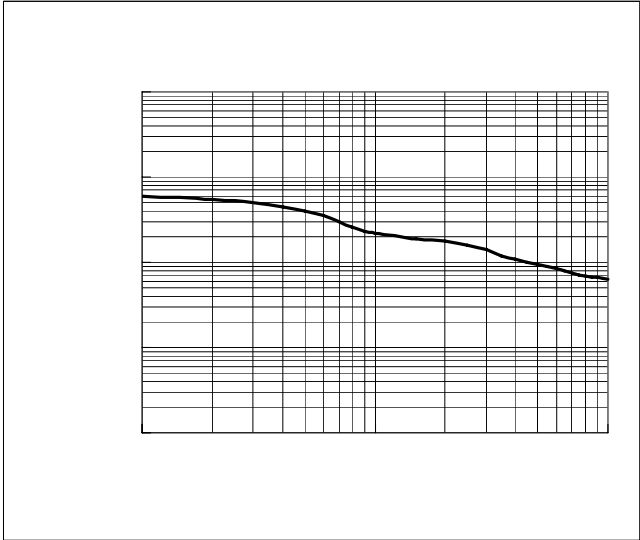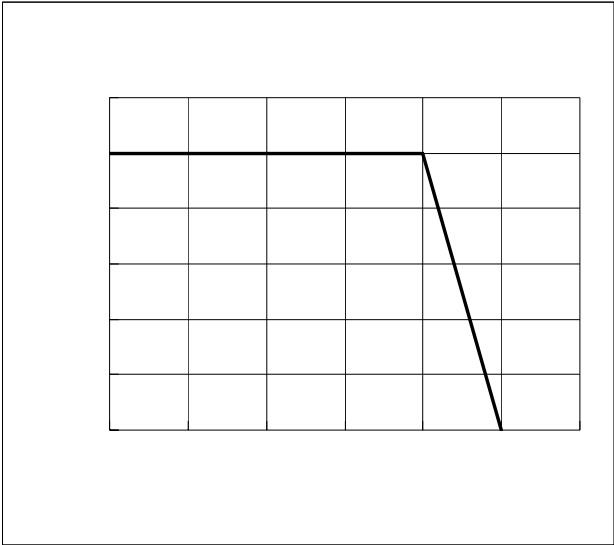

/ Package Dimensions

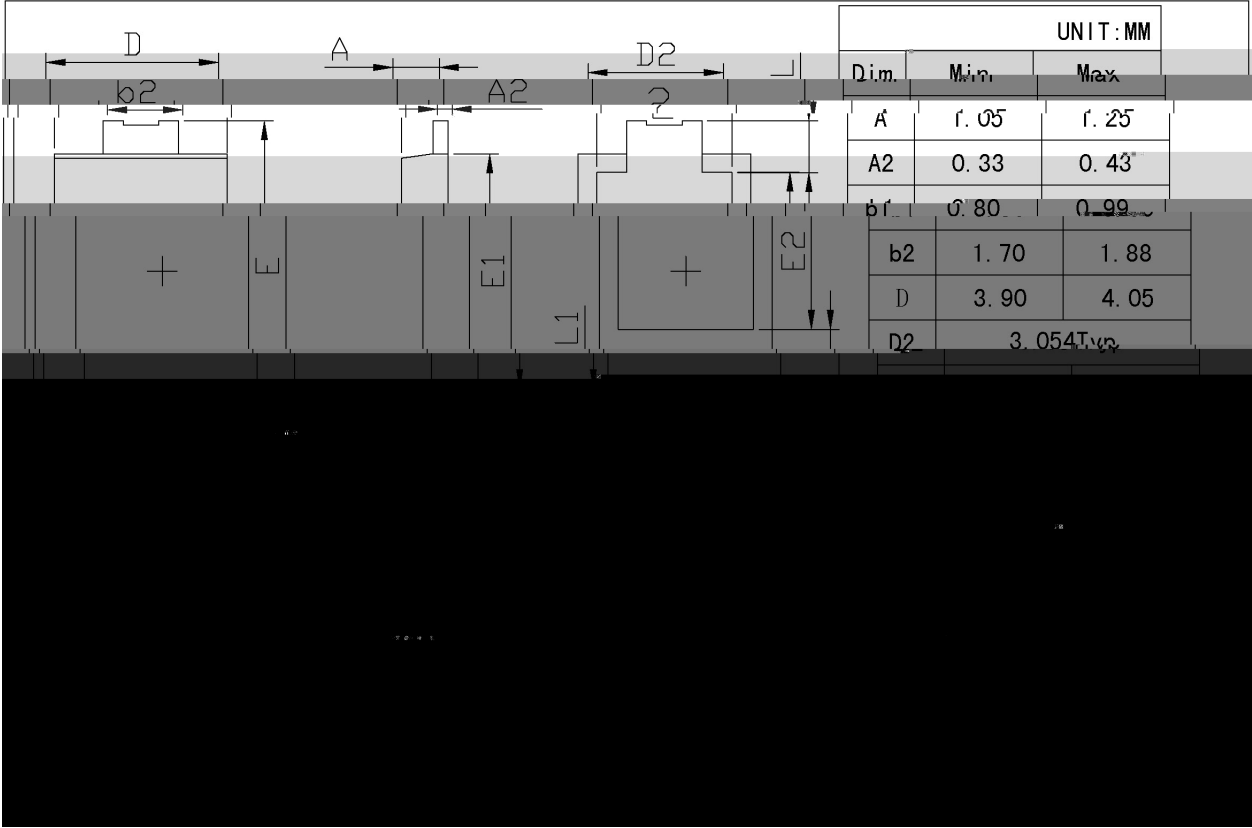

/ Marking Instructions

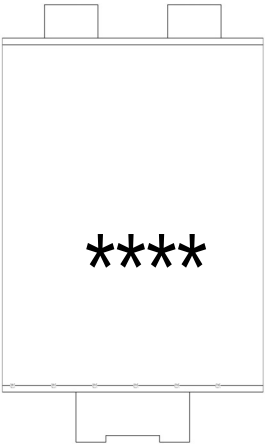

10100

10100

 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
TO-277	5,000	3	15,000	6	90,000	13 ×12	360×360×50	380×335×366

/ Notices